
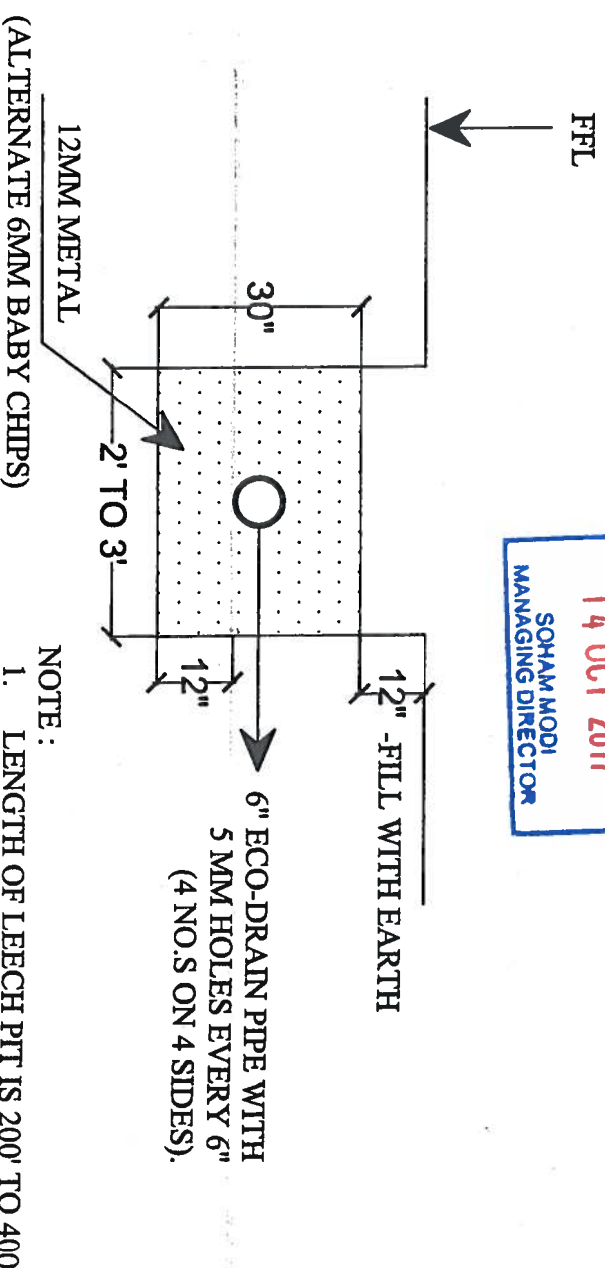


- NOTE :
1. SEPTIC TANK CAPACITY : NO. OF FLATS/VILLAS x 5 PERSONS x 135 LITERS PER PERSON x 1.5 TIMES = CAPACITY OF SEPTIC TANK.
  2. 'H' - HEIGHT OF SEPTIC TANK - MEASURE VOLUME OF SEPTIC TANK UP TO 'H' ONLY.
  3. 'X' - DEPTH IF INPUT LINE. MUST BE AS CLOSE TO THE FFL AS POSSIBLE (I.E. THE VALUE OF 'X' MUST BE LOW).
  4. SEWAGE WATER MUST REMAIN IN SEPTIC TANK FOR AT LEAST 1 DAY FOR ANAEROBIC BACTERIA TO DIGEST THE HUMAN WASTE & CLEAN THE SEWAGE.

APPROVED FOR CONSTRUCTION  
 14 OCT 2017  
 SOHAM MODI  
 MANAGING DIRECTOR

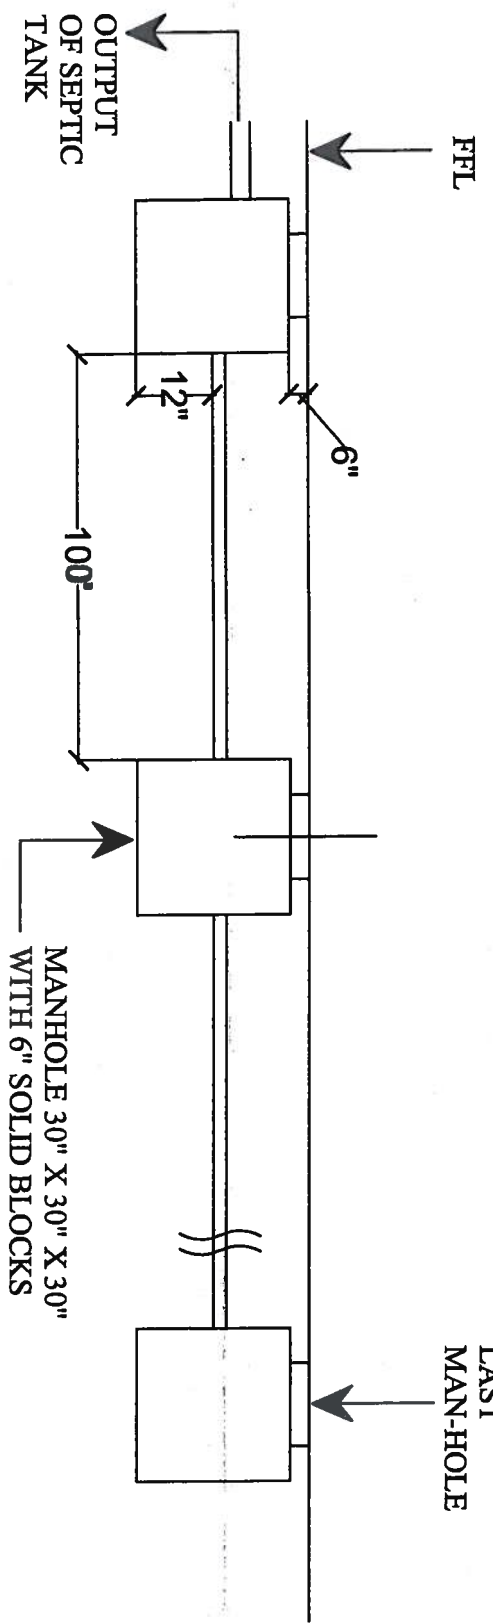

Description	STANDARD SCHEMATIC PLAN FOR SEPTIC TANK & LEECH PPT	
	Direction	
Owners & Developers :	Modi Properties Pvt. Ltd.	Promoted by Modi Properties Pvt. Ltd Phone: +91-40-66335551
	Project Name & Phase :	
Date :	14/10/2017	
Prepared by :	Madhav Bhatt	
Approved by :	Soham Modi	
Scale :	N.T.S	