


- GENERAL NOTES**
- USE M25 (1:1.5:2) GRADE CONCRETE FOR BEAMS & SLAB
 - USE F500 GRADE TOR STEEL.
 - PROVIDE CLEAR COVER OF 1.5" FOR COLUMNS, 1" FOR BEAMS & 3/4" FOR SLAB
 - PROVIDE 1" CAMBER AT FREE END FOR CANTILEVER BEAMS & SLABS.
 - IN SLAB EXTEND -VE STEEL UPTO 0.30L FROM FACE OF SUPPORT.
 - DO NOT PROVIDE EXTRA REINFORCEMENT AT SIMPLY SUPPORTS.
 - LAP LENGTH 48 D (D- IS THE DIA OF THE BAR) IN COMPRESSION.
 - LAP LENGTH 52 D (D- IS THE DIA OF THE BAR) IN TENSION.
 - ONLY FIGURED DIMENSIONS SHALL BE FOLLOWED.
 - ALL THE DIMENSIONS ARE IN INCHES & FEET.
 - DO NOT SCALE THE DRAWING.
 - REFER ARCHITECT DRAWING FOR CENTER LINE DIMENSIONS.

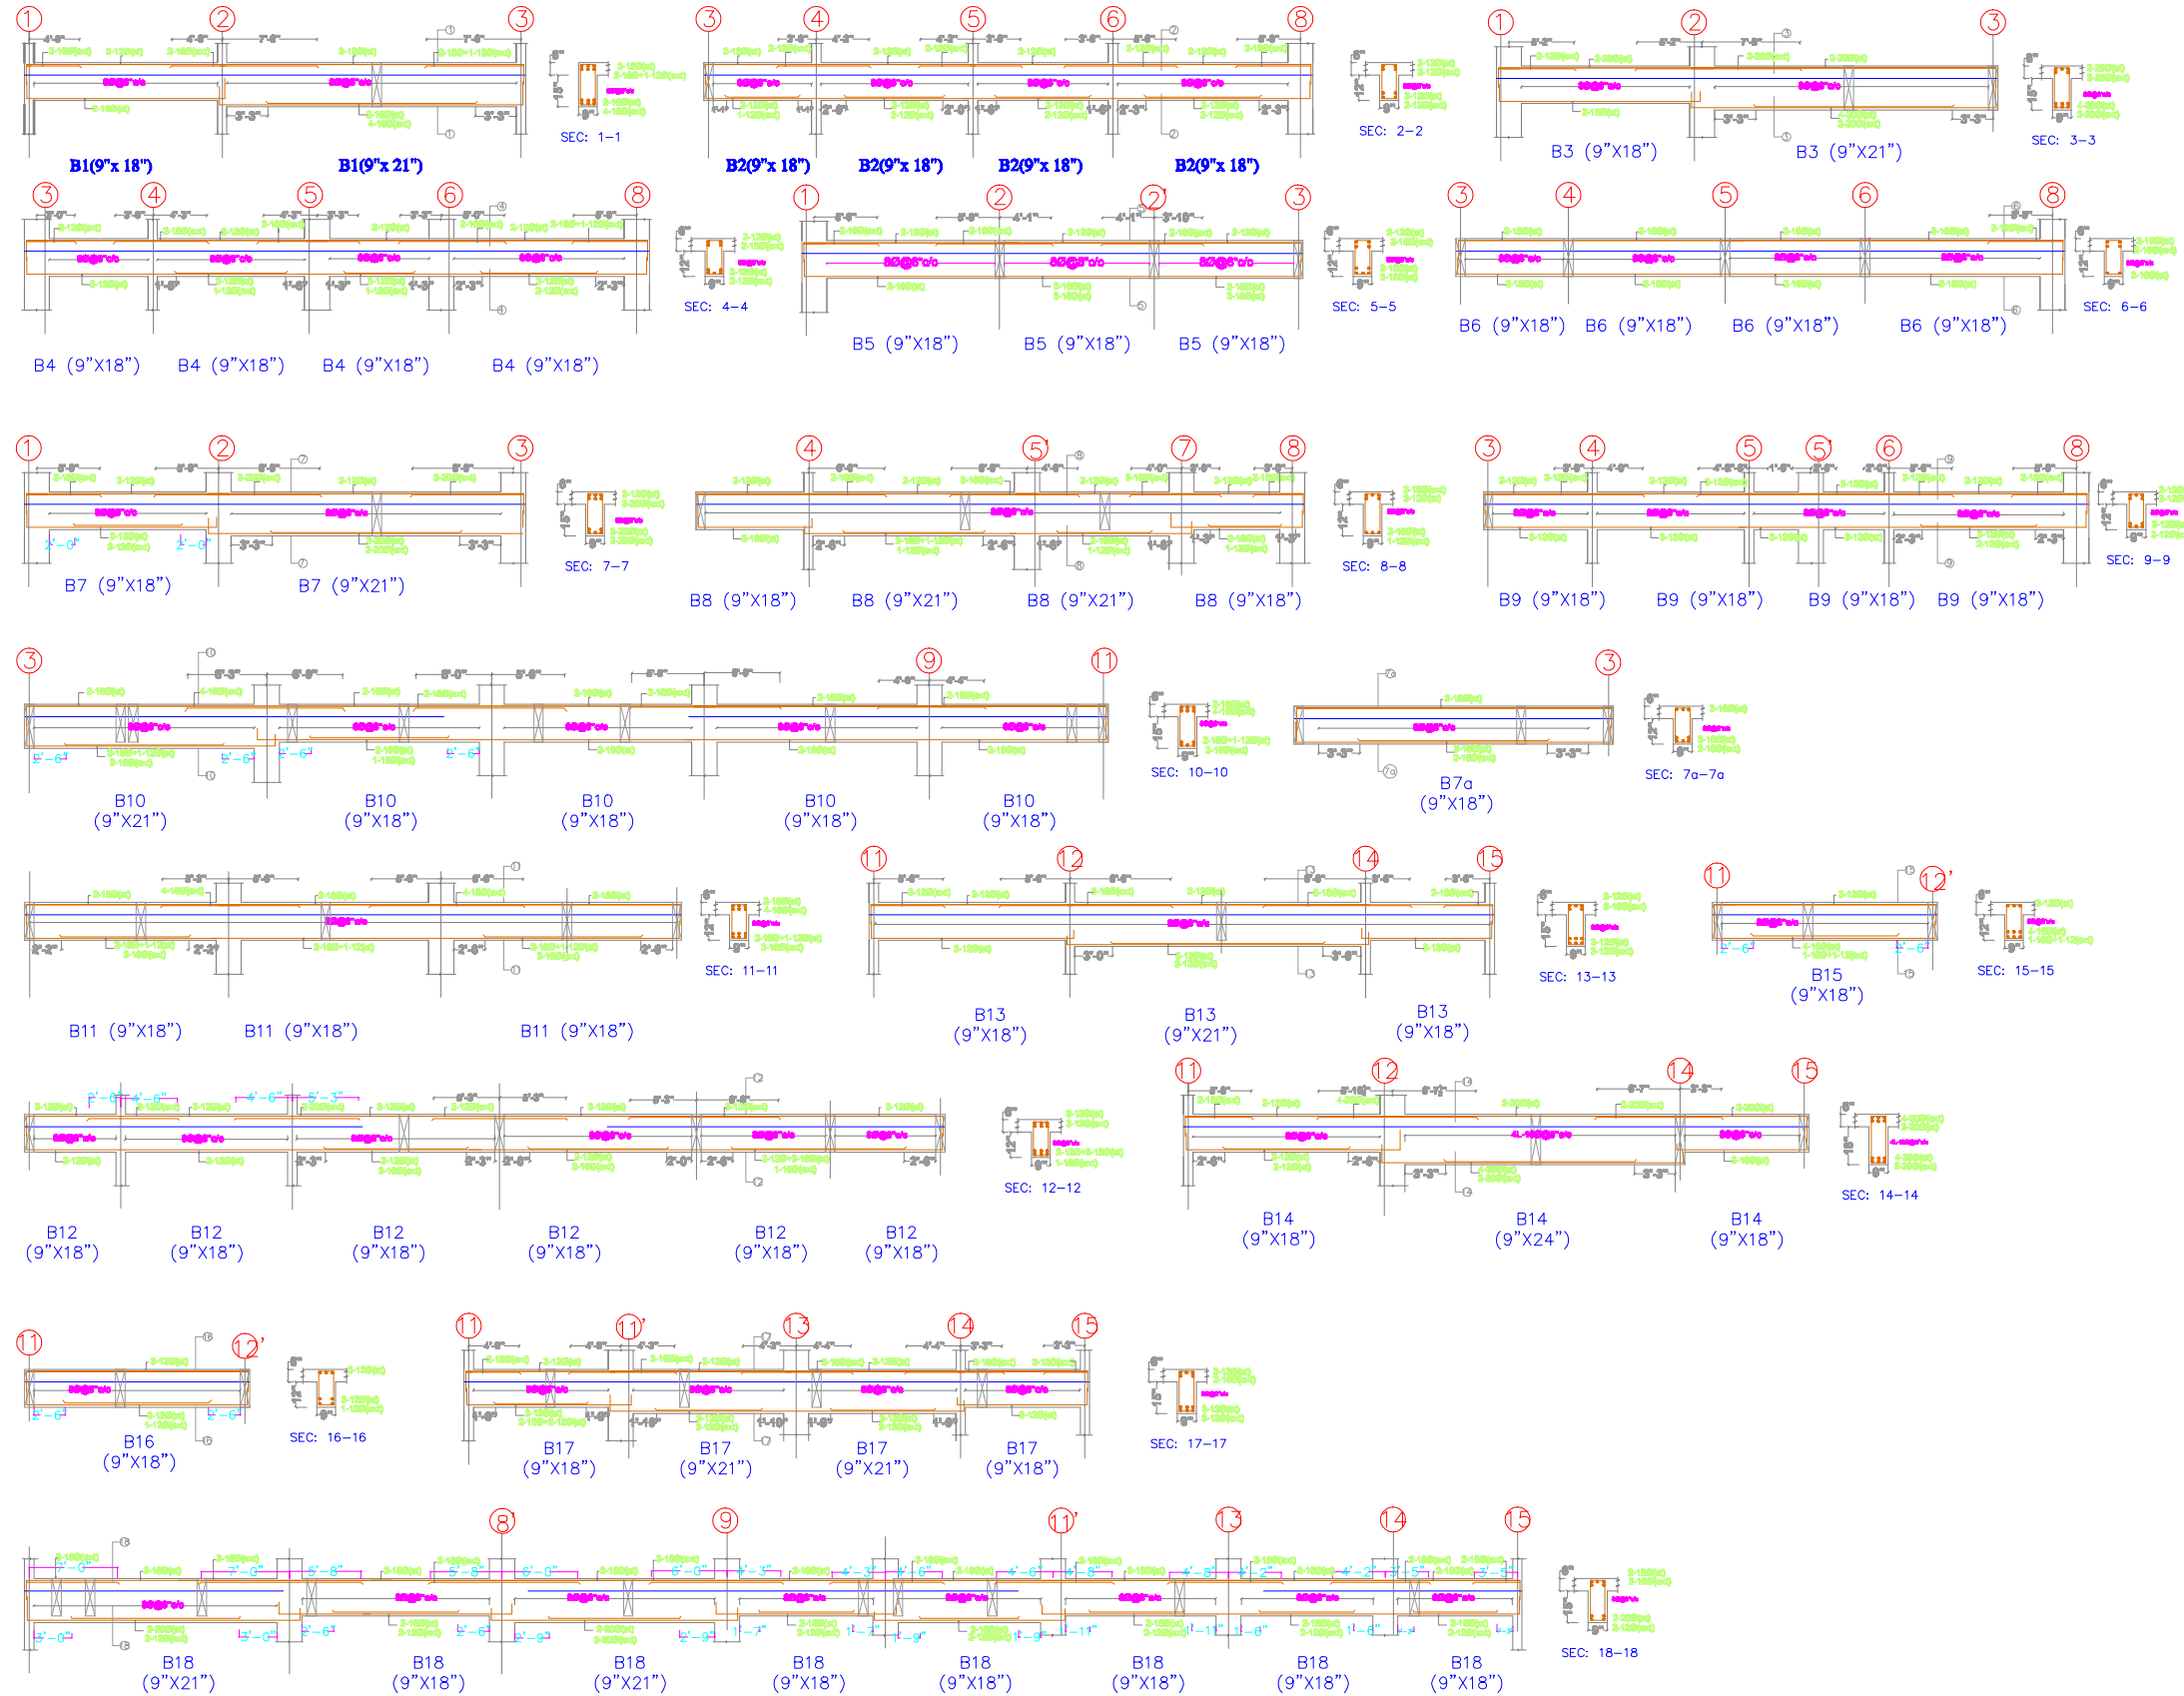

Owners & Developers:	B-4-187 / 38-4, Saham mansion, II Floor, H.G. Road, Secunderabad-500083. Phone: 64338851 (4lines) Fax: 940-27844088 E-mail: info@modiproperties.com
Architects & Engineers:	KULKARNI CONSULTANT'S STRUCTURAL ENGINEERS, ARCHITECTS & PROJECT CONSULTANTS #216, KUBERA TOWERS, NARAYAN GUDA, HYDERABAD. CONTACT NO'S: 04023223891, 09246343724, 09246343720.
SCALE:	N.T.S.
DATE:	27-06-2019
DESIGNED:	BANTORH
CHECKED:	KULKARNI
APPROVED:	KULKARNI
MAYFLOWER PLATINUM -- (A)	
TITLE:	BASEMENT -2 (BEAM SECTION DETAILS -1)
DWG. NO.	SAN/MP/SD/B/14
REV. No.	0

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT