


D - B2 PART 1

D - B2 PART 1

D - B2 PART 2

D - B2 PART 1

D - B2 PART 2

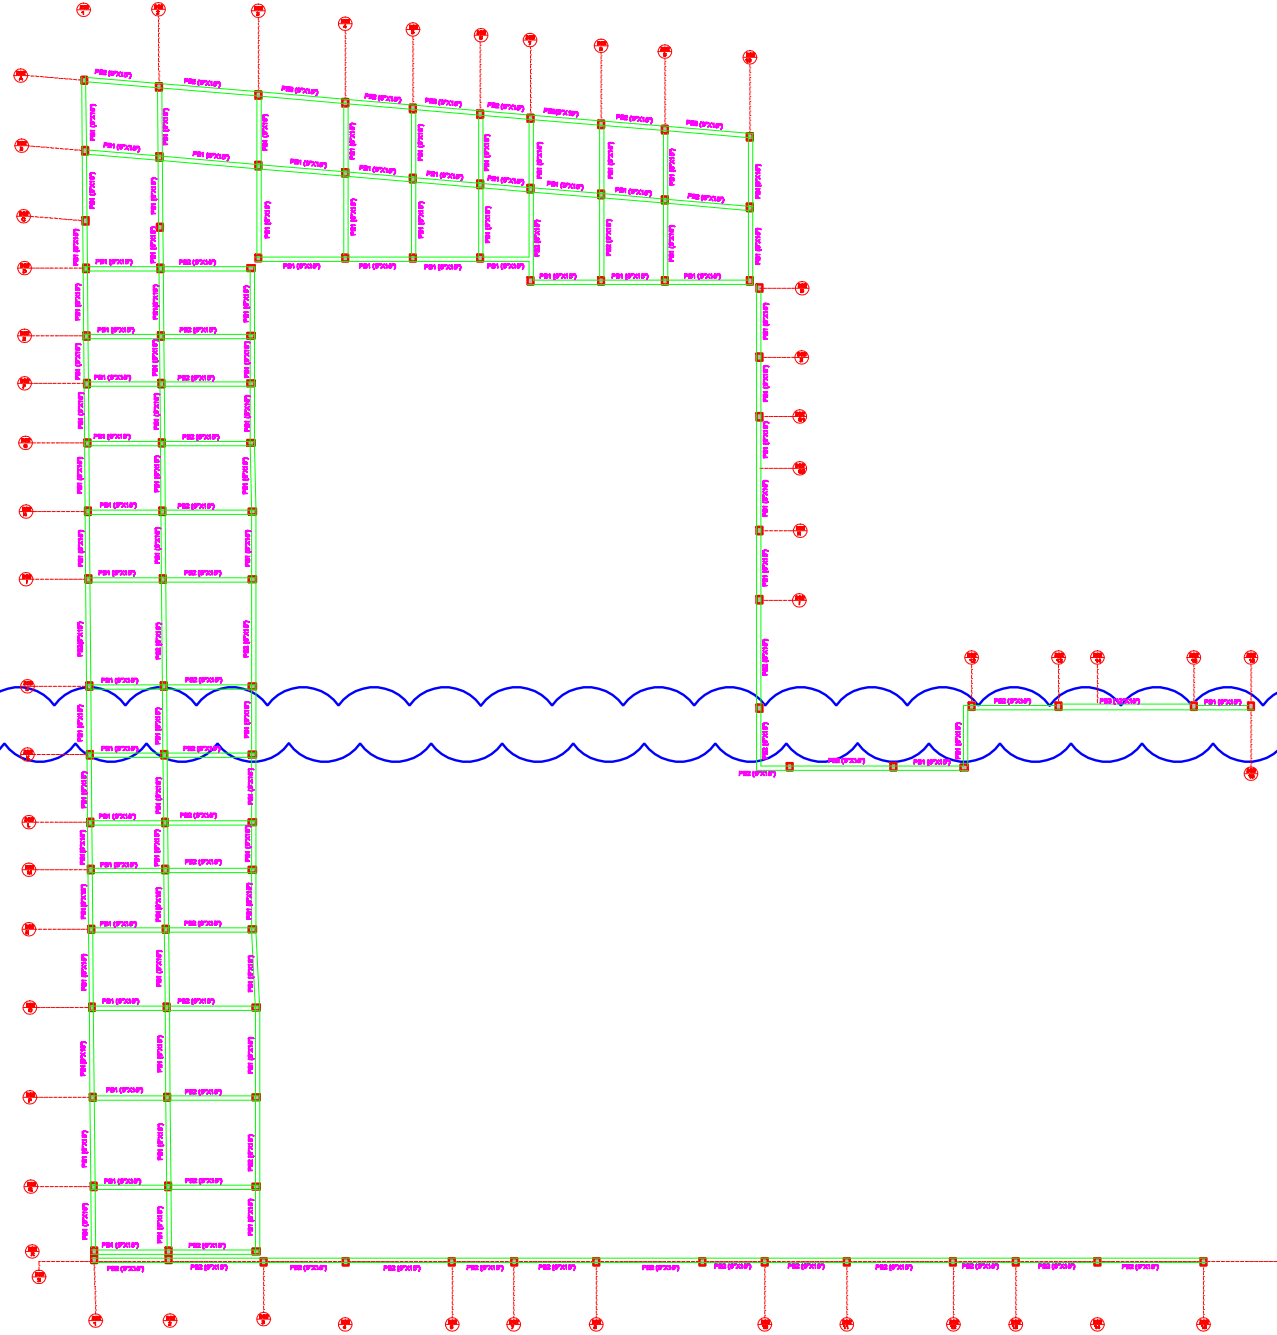


DRIVE WAY PLINTH BEAM LAYOUT

D - B2 PART 2

GENERAL NOTES

1. USE M25 (1:1.5:2) GRADE CONCRETE FOR BEAMS & SLAB
2. USE FE500 GRADE TOR STEEL.
3. PROVIDE CLEAR COVER OF 1.5" FOR COLUMNS , 1"FOR BEAMS & 3/4" FOR SLAB
4. PROVIDE 1" CAMBER AT FREE END FOR CANTILEVER BEAMS & SLABS.
5. IN SLAB EXTEND -VE STEEL UPTO 0.30L FROM FACE OF SUPPORT.
6. DO NOT PROVIDE EXTRA REINFORCEMENT AT SIMPLY SUPPORTS.
7. LAP LENGTH 48 D (D- IS THE DIA OF THE BAR) IN COMPRESSION.
8. LAP LENGTH 52 D(D- IS THE DIA OF THE BAR) IN TENSION.
9. ONLY FIGURED DIMENSIONS SHALL BE FOLLOWED.
10. ALL THE DIMENSIONS ARE IN INCHES & FEETS.
11. DO NOT SCALE THE DRAWING.
12. REFER ARCHITECT DRAWING FOR CENTER LINE DIMENSIONS.

Owners & Developers:	5-4-187 /384,Soham maneloni,II Floor, N.G. Road, Secunderabad-500032, Phone:86335551(4lines) Fax:040-27544058 E-mail :info@modiproperties.com		
Architects & Engineers:	 KULKARNI CONSULTANT'S STRUCTURAL ENGINEERS, ARCHITECTS & PROJECT CONSULTANTS #216, KUBERA TOWER'S, NARAYAN GUDA, HYDERABAD. CONTACT NOS:- 04022223891, 09246343724, 09246343726.		
SCALE:	N.T.S	MAYFLOWER PLATINUM (A)	
DATE:	04-06-2019	TITLE:	PLINTH BEAM LAY OUT (DRIVE WAY) - 1
DRAWN:	SANTOSH	DWG. NO.	SYS/MP/SD/B/4
DESIGNED:	SANTOSH	REV. No.	0
CHECKED & APPROVED:	KULKARNI		