From	From Company:	Crescentia Labs Pvt Ltd	Pvt Ltd					Delivery	Delivery Location:	GV One Plot No.15 Hydershad	GV One Plot No.15-B, MN Park Phase	k Phase-IS	GV One Plot No.15-B, MN Park Phase-ISy No. 230 to 243Turkapally Hyderahad Talangana 500078
		"GSTNO:36AADCB2608M1Z0	CB2608A	M1Z0						Ansari,04066335551	66335551	87,000,0	
Suppli	Supplier Details												
Pump 30/21/.	Pump Engineering Enterprises 30/21/35 Eluru Road, Old Emr	Pump Engineering Enterprises 30/21/35 Eluru Road, Old Employement Road Opp: Navata Transport, Chuttugunta,	d Opp: N	Vavata Transpo	ort, Chut	tugunta,	PO No		20240118032	32	Quote No		REF:PEE:ES:H809F.6820/23-
Vijaya	Vijayawada, Krishna, AP, 520004 GSTIN:37AEKPG4624C1ZS	P, 520004	:	•			PO Date		18 Jan 2024	4	Quote Date		26 Dec 2023
G.Kag pumpe	O.Kaghu Kumar, 9848043670 pumpengineeringenterprises@gmail.com	ises@gmail.com					Supply Type	pc	Purchase Order	rder	Requisition Num	Num	20240118033
SNo.	Item Name		Qty	Rate	Dis%	Taxable			%LSD	%J			Amount
							%LS9I	%LSDO	%LSSS	IGST	CGST	SGST	
	FIRE3899-Fire & Safety-Fire pumps-Booster-450lpm at 35M head-Nos.	& Safety-Fire 450lpm at 35M	2.00	48,000.00	%0	000,96	18%	%0	%0	17,280	0	0	1,13,280
Addl		With booster panel, Head 35 meters, 900LPM	900LPN	1									
2	FIRE4749-Fire & Safety-Fire pumps-DieselNos.	& Safety-Fire	1.00	4,50,000.00	%0	4,50,000	18%	%0	%0	81,000	0	0	5,31,000
Addl		12V 130AH battery, 14 lts oil, 25 lts coolant, tank 110 lts, capacity, with DG operation panel.	coolant,	, tank 110 lts,	capacity,	with DG o	peration pa	mel.					
3	FIRE7831-Fire & Safety-Fire pumps-ElectricNos.	& Safety-Fire -Nos.	2.00	1,80,000.00	%0	3,60,000	18%	%0	%0	64,800	0	0	4,24,800
Addil Spec	Head 80 meters, 2280LPM	2280LPM											
4	FIRE3388-Fire & Safety-Fire pumps-JockeyNos.	& Safety-Fire Nos.	2.00	78,000.00	%0	1,56,000	18%	%0	%0	28,080	0	0	1,84,080

25/01/24 01:13:39 PM

Original

Addl Head 80 meters, 180LPM Spec					
	Total Amount	1,91,160	0	0	12,53,160
Rupees in words: Twelve Lakhs Fifty Three Thousands One Hundred And Sixty Only.					

erms and Conditions:-

As per the approved quotation attached dated 26-12-23. Additional Specifications

Inclusive of GST and other taxes.

Within 3 weeks from the date of PO Delivery Date:

Included in the above prices As given above. Delivery Location: Fransport: Rs. 6,26,580/- by RTGS/NEFT. Advance Paid: 50% As advance balance against material delivery ready to dispatch PI. Payment Terms:

Proof of delivery & original invoice must be delivered to Second floor, Soham Mansion, M.G. Road, Secunderabad- 03.Do not send to site.

We reserve the rights to reject the items if not as per the specifications, Warranty 12 months from the date of commissioning.

Weighment

Bill submission:

Other Terms:

- . This is a digitally generated order and no signature is required.
- 2. In case the vendor is unable to accept the order and supply the material, they must intimate the same by email to purchase@modiproperties.com.
  - 3. Vendors must obtain acknowledgment from site as proof of delivery (POD) on relevant document like DC, e-way bill, packing list, etc.
- 4. Vendor must send original invoices to our head office (HO) on the address mentioned above. Do not send the original invoices to sites or purchase division office. An acknowledgment on a copy of the invoice will be provided upon request at our HO.
  - 5. We reserve the right to cancel this PO and seek refund of the advance paid in case of delay in delivery or items delivered are not as per specifications, including delivery of defective material.
    - 6. Payment against delivery /installation shall only be made after receipt of original signed invoice at HO.

25/01/24 01:13:39 PM

## Requisition Form

Company Ivame	value		Crescentia Labs Pvt Ltd		Date	18 Ion 2024	1	
Site Or Phase	isc		GV One		Time	10 Jan 202	+	
For Use In	For Use In Flat/Villa/Other	er	Fire fighting pumps		Rea.No.	20041100000	33	
Material re	Material required before date	date				202401190	23	
S.No	Description		Qty Required	Oty Available at Site	Order Orv	Sact Rate	Territoria	1
_	FIRE3899-Fire 35M head-Nos.	FIRE3899-Fire & Safety-Fire pumps-Booster-450lpm at 35M head-Nos.	om at 1.00	0	2.00	55,460.00	Inward No	Date
Add Spec	With booster panel	er panel						
2	FIRE3388-	FIRE3388-Fire & Safety-Fire pumps-JockeyNos.	2.00	0	2 00	00 000 04		
3	FIRE7831-	FIRE7831-Fire & Safety-Fire pumps-ElectricNos.		0		7 16 530 00		
4	FIRE4749-1	FIRE4749-Fire & Safety-Fire pumps-DieselNos.	1.00			00.955,01,7		
Add Spec	12v 130ah t	12v 130ah battery, 14lts oil, 25 lts coolent, tank 110 ltscapacity, with 1	)G or		1.00	4,97,370.00		
PO Num		D	Date	Type		Status		
20240118032	2	18	18 Jan 2024	PO		Open PO		1
Sno	Role	User		Remarks				
1	MEP	Akhil Murthy				Da	Date And Time	
2	MEP	Akhil Murthy				18 Jan 2	18 Jan 2024 03:40:36 pm	mc
8	MEP	Akhil Murhy				18 Jan 2	18 Jan 2024 03:46:35 pm	m
1		training training				18 Jan 2	18 Jan 2024 03:49:49 pm	ш
4	MEP	M. Ramesh Reddy	System Generated: This	System Generated: This Requisition Has Been Annrowed	nnroved	101	00.00.00 000 mg 81	

Prepared By :- Akhil Murthy	
Sign:-	Approved By:-
Date :- 18 Jan 2024	Sign:-
Notes On second 2	Date:-

Note: On receipt of material at site write inward number and date in last two columns

-	the state of the s										-		
pared by	by	N. Vanajakshi/Prabhakar			1								
		11-01-2024		Net rate after discount + GST	iscount + GST								
				PUMP ENGINEERING ENTERPRISES (Make: 1	PUMP ENGINEERING CENTERPRISES (Make: Kirloskar)	Deraz Engineers (Make KSB)	Andhra Pumps (Make Kirloskar)		Entex Private Limited(Wilo)	ited(Wilo)	Last purchas	ed/GVDC/Entex	Last purchased/GVDC/Entex Private Limited (Make: WILO)
	100000	A deficience or secure	Oro Units	Rafe	Amount	Rate Amount	Rate	Amount	Rate	Amount	Rate	Amount	Specs
No	SKU	Additional specs			4 24 800	584		4,95,600	2,81,430	5,62,860	2,16,530	4,33,060	4,33,060 Head 70mtrs, 2280LPM
	1 Motor/Electrical Driven Pump	Head Somits, 2480LF W	1 Nos	4 95 600	4 95 600	5 23 420 5 23 420	5,34,540	5,34,540	5,50,470	5,50,470	4,97,370	4,97,370	4,97,370   Head 70mtrs, 2280LPM
	2 Diesel Engine Driven Pump	Head Somirs, 2280LFW	o Mari	020,000	1 84 080			1.84,080	89,090	1,78,180	70,800	1,41,600	1,41,600 Head 70mtrs, 180LPM
	3 Jockey Pump	Head Somirs, 180LPM	2 Nos		060,440,1			1.68.504	89.680	2,69,040	55,460	1,66,380	.66,380 Head 35mtrs, 450LPM
	4 Booster Pump	Head 35mtrs, 900LPM	3 Nos		076'60'1			15.360	82,600	82,600			
	5 Battery		SON 1	Ontor	(								
	10 Total				12,90,000	13,15,563		13,98,084		16,43,150		12,38,410	
					9								
ies.					2								
	1 Material required for site	IA5									PO No: 92543		
	2 Details of requisition no. required by, etc. 3 Transport charges	od bv, etc.		Included	Included in the above price.	Extra at actuals.	Extra at actuals.		Extra at actuals		Extra at actuals		
						Off he made more alone of a	2.3 weeks from the date of PO		6-Sweeks from the date of PO		6-8 weeks from the date of PO	he date of PO.	
	4 Delivery period			1-2 Weeks Hom	as Advance payment	25% as Advance bayment	30% as Advance payment		30%as advance		100% as Advance payment	payment.	
	5 Advance 6 Payment terms					25% as advance & 75% payment	30% as advance & 70% navment against PI prior to		30%as advance, Balance against performa invoice before dispatch		100% as Advance payment	payment.	
				\			dispatch.						
	7 Loadine cost		•	Included in the above price		Included in the above price.	Included in the above price		Included in the above price		Included in the above price	love price.	
	8 Unloading cost			Our scope	Our scope	Our scope	Our scope		Our scope. 12 Months from the date of	Ī	Our scope.  1 Year from the date of	ate of	
	9 Warranty		\	TOTAL STREET	THE MILE OF THE PARTY.	commissioning /18months from the	1071		commissioning /18months from the date of disnatch		commissioning		
						date of dispatch			and an in our our				
	10 Other term I												
1	11 Other term 2		-										
			_			40							
	-		/	•	` '	3							
1	2	-	/	)		//							
	1					\ \ \ \ \	<						
	-			5	2018	/	1						
	_	7-	•	2	ł	1	2						
				9	0	3	0	/					
				) _	200	1		1					
			*	,	\	0/	Fred	/					
				۲	\	200	نے	1					
				>	\	4	000	1					
				,		The state of the s	The state of the s						
						100	No.						
						54	1						
						200							
						100							

# Request for payment

Division	Purchase/Procurement:			
Pay to	Pump Engineering Enterprises		Translit All X	
Towards	Supply of Fire Pumps for GV1		VKIN/CKN	
Amount	Rs:6,26,580/-			
Payment/ cheque date	☐ coming Monday □ Other date:29/01/2024	ate:29/01/2024		
In case of other date, given reason				
Payment from company	Crescentia Labs Pvt Ltd			
Project	GVI			
Type of payment	☐ Advance ☐ Part Payment ☐ Balance Pay ☐ PD/C ☐ Transfer to Cash card/betro card ☐ Other	□ Part Payment □ Balance Payment □ Fu¶ Payment □ Cash card/betro card □ Other	l Payment	
Payment mode	□ Cheque □ Pay order ☑ RTGS/NEFT □ Cash □ Online payment □ Payment by Cash card □ Transfer to Cash card □ Transfer to petro card □ Other:	RTGS/NEFT □ Cash □ Can □ Cansfer to Cash card □ Tran	Online payment Isfer to petro carc	
PO no.	20240118032	Requisition no.	20240118033	
Remarks/ Desc.	50% as Advance, balance against material ready to dispatch PI.	inst material ready to disp	atch PI.	
		2		1
Requested by:	Approved by:	Sign	Date	
N. Vanajakshi	Minish		23-01-2024	APPROVED BY
				2 4 JAN 2024
				SOHAM MODI MANAGING DIRECTOR

Note: I. Use this note for all requests for payment. 2. Do not use for weekly site payments. 3. Use for all transfers to Cash card or petro card. 4. Request for payment must be made by Thursday for payment to be made on the coming Monday. 5. In case of urgent payment or other dates write justification. 6. VRN/CRN nos to be mentioned in case of payments made to vendors/contractors.



"GSTNO:36ADCB2608M1Z0  g Enterprises coad, Old Employement Road Opp: Navata Transport, Chuttugunta, shna, AP, 520004 (204624C1ZS 99-Fire & Safety-Fire Booster-450lpm at 35M 0, pp. Rate Booster-450lpm at 35M 0,	From (	From Company: Crescen	Crescentia Labs Pvt Ltd	P					Delivery	Delivery Location: GV One	GV One		1		5
PO No			):36AADCB260	08M1Z	02		.e				Plot No.15 Hyderabac Ansari,04	5-B, MN Fa 1, Telangana 166335551	ırk Phase-Ι 1,500078	Sy No. 230 to 243Turkapa	ally
Po No   Po Date   Po Dat	Suppli	er Details +													
National All   Nati	Pump 30/21/	Engineering Enterprises 35 Eluru Road, Old Employe	ment Road Opp	p: Nav	ata Transpo	rt, Chut	tugunta,	PO No		202401180	032	Quote No		REF:PEE:ES:H809F.682 24	20/23-
Them Name	Vijaya GSTIN	wada, Krishna, AP, 520004 1:37AEKPG4624C1ZS					7 1	PO Date		18 Jan 202	24	Quote Dat	0	26 Dec 2023	
	o.rag pumpe	ngineeringenterprises@gma	il.com					Supply Ty	pd.	Purchase (	Order	Requisition	n Num	20240118033	
FIRE3899-Fire & Safety-Fire pumps-Booster-450lpm at 35M at 35M and at 35M at 35M and at 35M at 35M and at 35M at 35M at 35M at 35M and at 35M	SNo.	Item Name	Qty	Rai		Dis%	Taxable Amount			GS	T%!			Amount	
FIRE3899-Fire & Safety-Fire pumps-Booster-450lpm at 35M								%LSDI	CGST%	%L\$9S	IGST AMT	CGST	SG8T AMT		
With booster panel, Head 35 meters, 900t,PM         PIREA749-Fire & Safety-Fire         1.00         4,50,000.00         0%         4,50,000         18%         0%         81,000         0         0           PURBE4749-Fire & Safety-Fire         1.00         4,50,000.00         0%         4,50,000         18%         0%         81,000         0		FIRE3899-Fire & Safety-F pumps-Booster-450lpm at head-Nos.		00	48,000.00	%0	000,96			0%0	17,280	0	0	N,13	3,280
FIRE 4749-Fire & Safety-Fire &	Add		35 meters, 900L	,PM											
12V 130AH battery, 14 Its oil, 25 Its coolant, tank 110 Its, capacity, with DG operation panel.  FIRE7831-Fire & Safety-Fire pumps-Electric-Nos.  Head 80 meters, 2280LPM  FIRE3388-Fire & Safety-Fire 2.00 78,000.00 0% 1,56,000 18% 0% 0% 28,080 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	64			- commence	,50,000.00	%0	4,50,000	18%	%0	%0	81,000	0	0	8,31	1,000
FIRE7831-Fire & Safety-Fire pumps-Electric-Nos.  Head 80 meters, 2280LPM  FIRE3388-Fire & Safety-Fire 2.00 78,000.00 0% 1,56,000 18% 0% 0% 0% 28,080 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Add		oil, 25 lts cools	ant, tar	nk 110 lts, c	apacity,	with DG o	peration pa	nel.						
Head 80 meters, 2280LPM         FIRE3388-Fire & Safety-Fire       2.00       78,000.00       0%       1,56,000       18%       0%       0%       28,080       0       0					,80,000.00	%0	3,60,000	18%		%0	64,800	0	0	4,24	4,800
FIRE3388-Fire & Safety-Fire pumps-JockeyNos.	Add		1												
	-			00.	78,000.00	%0	1,56,000	18%		%0	28,080	0	0	1,84	4,080

23/01/24 10:\$1:51 AM

Addl Head 80 meters, 180LPM Spec					
	Total Amount	1,91,160	0	0	12,53,160
	The second secon		-		
Rinness in words: Twelve Lakhs Fifty Three Thousands One Hundred And Sixty Only.					

Terms and Conditions:-

As per the approved quotation attached dated 26-12-23. Additional Specifications

Inclusive of GST and other taxes.

Within 3 weeks from the date of PO.

Delivery Date ?

Included in the above prices As given above. Delivery Location:

Rs. 6,26,580/- by RTGS/NEFT..

50% As advance balance against material delivery ready to dispatch PL.

Payment Terms: Bill submission:

Other Terms: Weighment:

Advance Paid:

Transport:

Proof of delivery & original invoice must be delivered to Second floor, Soham Mansion, M.G. Road, Secunderabad- 03.Do not send to site.

We reserve the rights to reject the items if not as per the specifications, Warranty 12 months from the date of commissioning

## Notes:

- 1. This is a digitally generated order and no signature is required.
- 2. In case the vendor is unable to accept the order and supply the material, they must intimate the same by email to purchase@modiproperties.com.
  - 3. Vendors must obtain acknowledgment from site as proof of delivery (POD) on relevant document like DC, e-way bill, packing list, etc.
- 4. Vendor must send original invoices to our head office (HO) on the address mentioned above. Do not send the original invoices to sites or purchase division office. An acknowledgment on a copy of the invoice will be provided upon request at our HO.
  - 5. We reserve the right to cancel this PO and seek refund of the advance paid in case of delay in delivery or items delivered are not as per specifications, including delivery of defective material.
    - 6. Payment against delivery /installation shall only be made after receipt of original signed invoice at HO.

23/01/24 10:51:51 AM

Requisition Form

ompany Name	ame		Crescentia I	Crescentia Labs Pvt Ltd		Date	te	18 Jan 2024	124	
te Or Phase	9.		GV One		*	Tin	Time	03:49:49		
s In F	or Use In Flat/Villa/Other		Fire fighting pumps	sdund s		Re	Req.No.	20240118033	8033	
al req	aterial required before date	ite								
	Description		Qts	Qty Required	Qty Available at Site		Order Qty	Last Rate	Inward No	Date
	FIRE3899-Fire 35M head-Nos.	FIRE3899-Fire & Safety-Fire pumps-Booster-450lpm at 35M head-Nos.	Olpm at	1.00	-	Q	2.00	\$5,460.00	, 00	
dd Spec	With booster panel	· panel								
	FIRE3388-F	FIRE3388-Fire & Safety-Fire pumps-JockeyNos.	38.	2.00		0	2.00	70,800.00	00	
	FIRE7831-F	FIRE7831-Fire & Safety-Fire pumps-ElectrieNos.	os.	2.00		0	2.00	2,16,539.00	00	
	FIRE4749-F	FIRE4749-Fire & Safety-Fire pumps-DieselNos.	S.	1.00		0	1.00	4,97,370.00	00	
dd Spec	12v 130ah b	12v 130ah battery, 14lts oil, 25 lts coolent, tank 110 ltscapacity, with DG operation panel	110 Itscapacity,	with DG operat	ion panel					
O Num		α '	Date		Ty	Type .		Status		
0240118032	32		18 Jan 2024		PO			Approved		
Sno	Role	User			Remarks				Date And Time	
	MEP	Akhil Murthy						181	18 Jan 2024 03:40:36 pm	md
	MEP	Akhil Murthy						L81	18 Jan 2024 03:46:35 pm	md
	MEP	Akhil Murthy						181	18 Jan 2024 03:49:49 pm	pm
	MEP	M. Ramesh Reddy	Syste	m Generated:Th	System Generated: This Requisition Has Been Approved	Been Ap	proved	181	18 Jan 2024 04:06:39 pm	md

	5
	rth.
1	ME
	E
	Ak
	.1.
177	By
8	pa
	bar
	4.5

.

ate :- 18 Jan 2024


Approved By;-

Sign/-

Date:-

te: On receipt of material at site write inward number and date in last two columns




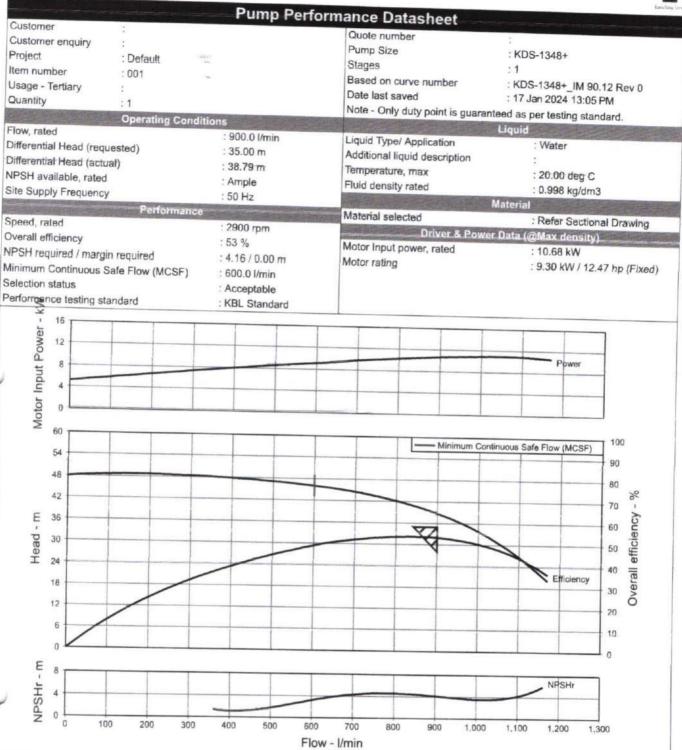




	Pump Perforn	nance Datasheet	Stage State State State
Customer :		THE RESERVE THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUMN TWIND TWO IS NAMED IN COLUMN TWO IS NAMED IN COLUMN TWO IS NAMED IN	CAPO.
Customer enquiry :		. 1	64561
Project : Default			B 32/26xe
tem number : 001			
Usage - Tertiary :			D1A704AA0 Rev 0
Quantity : 1		. 00	8 Jan 2024 3:27 PM
Operating Cond	itions	Note - Only duty point is guaranteed a	
Tow, rated	: 10.80 m3/h	Liquid Type/ Application	: Water
Differential Head (requested)	: 80.00 m	Additional liquid description	
Differential Head (actual)	: 80.00 m	Solids diameter, max	: 0.00 mm
Suction pressure, rated / max	: 0.00 / 0.00 bar.g	Solids/Bagasse/Stock consistency by	: 0.00 %
NPSH available, rated	: Ample	volume	
Site Supply Frequency	: 50 Hz	Temperature, max	: 20.00 deg C
Performanc	of the state of the state of the state of	Fluid density rated	: 998.3 kg/m3
Speed, rated	: 2920 rpm	Viscosity, rated	: 1.00 cSt
mpeller diameter, rated (approx.)	: 239 mm	Vapor pressure, rated	: 0.02 bar.a
mpeller diameter, maximum	: 264 mm	Materi	al
mpeller diameter, minimum	: 211 mm	Material selected	: 86 MOC-CI260(012)/BR
fficiency	: 29.35 %		LTB2(110)/45C8(056)
IPSH required / margin required	: 1.61 / 0.50 m	Pressure	Data
q (imp. eye flow) / S (imp. eye flow)	: 9 / 149 Metric units	Maximum working pressure	: 7.86 bar.g
linimum Continuous Safe Flow (MCSF)	: 5.74 m3/h	Maximum allowable working pressure	: 16.00 bar.g
ead, maximum, rated diameter (approx.)	: 80.31 m	Maximum allowable suction pressure	: 1.96 bar.g.
ead rise to shutoff (approx.)	: 0.39 %	Hydrostatic test pressure	: 18.34 bar.g
low, best eff. point	: 25.31 m3/h	Driver & Power Data	(@Max density)
low ratio, rated / BEP	: 42.68 %	Driver sizing specification	: Rated Power
iameter ratio (rated / max)	: 90.53 %	Margin over specification	: 15.00 %
ead ratio (rated dia / max dia)	: 81.58 %	Service factor	: 1.00
q/Ch/Ce/Cn [HI2010]	: 1.00 / 1.00 / 1.00 / 1.00	Power, hydraulic	: 2.35 kW
election status	: Acceptable	Power, rated	: 8.01 kW
erformance testing standard	: ISO 9906 clause 4.4.2	Power, maximum, rated diameter	: 12.75 kW
12		Minimum recommended driver rating	: 9.30 kW / 12.47 hp
> 16			
<b>≥</b> 12			Power
5 8			
Ψ	1		
Mo 4			
90 239 mm			Safe Flow (MCSF) 100
81 Zas mm	V A	Preferred operating re	
72	V		
			80
63			70
E 54			<b>%</b>
E 54 PR 45 PR 45 PR 36			60 >
D 45			50 00
Ĭ 36			50 ce journal de la company de
			Efficiency 40 E
27			30
18			20
			20
9			10
0			0
E 50			
5.0			NPSHr
Ĭ 2.5			
5.0 H 2.5 Q 0.0 Q 2 4 6 8	10 12 14 16 18	20 22 24 26 28 30 3	2 34 36 38



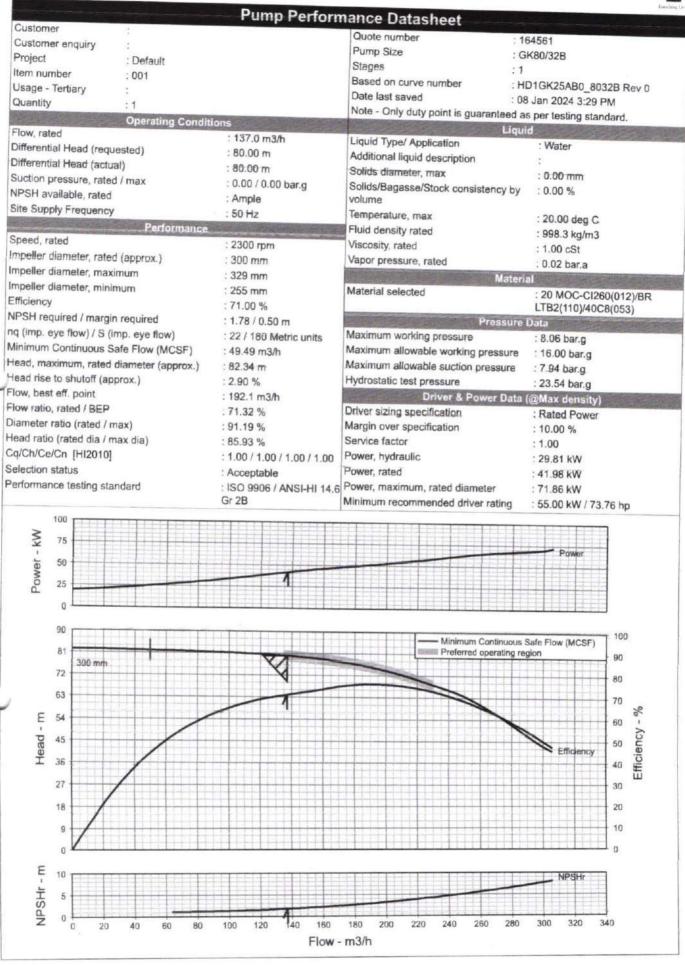

Dhone



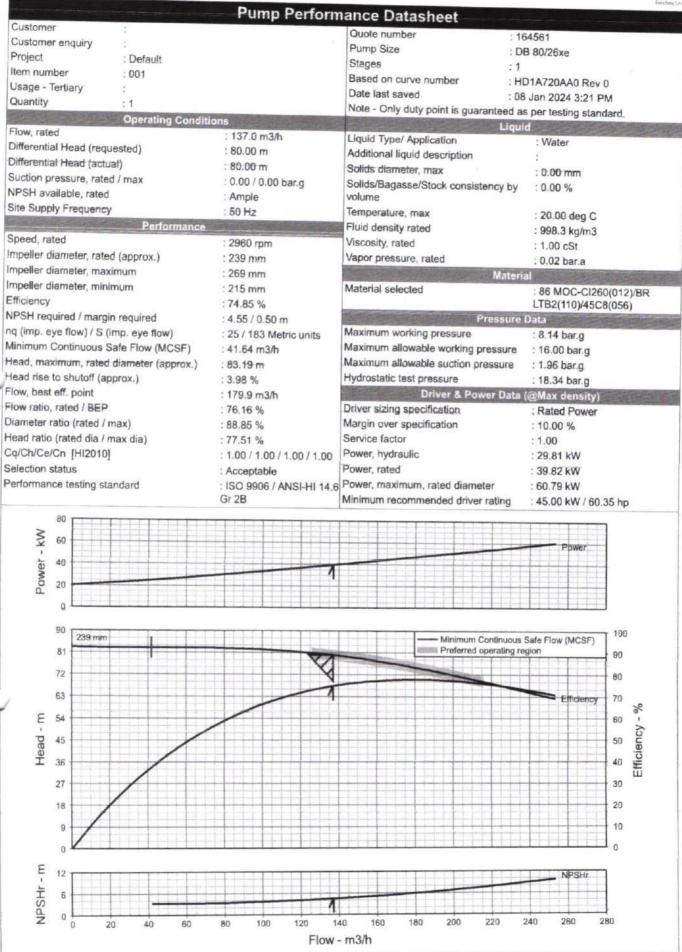

PUMP EN	PUMP ENGINEERING ENTERPRIS	RPRISES	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Authorized Dealer f	Authorized Dealer for 'KIRLOSKAR' & CROMPTON Motors   Pump:	Motors   Pumps 'S I MEI Starters.	Kintoski	
Head Off: #30/21/35, Eluru Road,Old Employment Office Road, Chuttugunta, Vijayawada-4	10/21/35, Eluru Road,Old Employment Office Road, Chuttugunta, pp. 8096667722, Email: pumpengineeringenterprises@gmail.com	d, Chuttugunta, Vijayawada-4 ises@gmail.com	Enriching Lives	
	GSTIN: 37AEKPG4624C1ZS			
STOMER NAME	M/s.Crescentia Labs Pvt Ltd.			
ect name & Project Location				
te Number	REF:PEE:ES:H809F.6820/23-24	4		
a	26 December 2023			
		Techno-commercial offer		
Application	Electrical Main pump	Jockey pump	DIESEL Engine Driven Pump	Booster pump
Make	Kirloskar	Kirloskar	Kirloskar	Kirloskar
ady T bins:	Clear Water	Clear Water	Clear Water	Clear Water
odki pihan	1,00	1.00	1.00	1.00
Specific Glavity	Ambient	Ambient	Ambient	Ambient
Temperature	437c::m/hr(2280lpm)	10.8cum/hr(180lpm)	137cum/hr(2280lpm)	54cum/hr(900lpm)
Flow (cum/hr)	13/ Cdill/III (2503-piii)	80	80	35
Head (mtr.)	00	220000000	GK80/33B	KDC 13/84
Pump Model	DB80/26Xe	DB32/26Xe	GN80/32B	ND3-1340+
Type of Pump	Centrufugal Horizontal Endsuction pump	Centrufugal Horizontal Endsuction pump	Centrufugal Horizontal endsuction pump	Monobloc pumpset
Suc X Del (mm)	100X80	50 X 32	125 X 80 mm	80 X 65
Selod fo old	2	2	NA	2
Nag Mad	2900	2900	2300	2900
Dasa/Vodes	50Hz/3phase	50Hz/3phase	12 Volts	50Hz/3phase
Otalia Mara	Single Stage	Single Stage	Single Stage	Single Stage
Motor Make/Efficiency	Siemens/CGL/BBL/IE2	CGL/BBL/IE2	KOEL	Kirloskar
Wotol Mane Emercing	45KW/60HP	9.3KW/ 12.5Hp	69BHP	9.3KW/ 12.5Hp
Motor Fower (rw)/Linguistrope		AN	4R1040	NA

Accessories	coupling ,Coupling guard and	pump, Motor Base Trame coup J Coupling guard and Foundation Bolts	coupling, Coupling guard and Foundation Bolts	Monobloc pumpset
1	Gland Pack	Gland Pack	Gland Pack	Gland Pack
Seal/Gland Packing	d de constant	Bronze	Bronze	Ö
Impeller	1 80 000	78,000	4,20,000	48,000
Price bid	2	2	-	2
Qty of Pumps			4.20.000.00	96.000.00
Total Price	3,60,000.00	00.000,000,		
tery,leads,k-oil, k-coolan	Battery, leads, k-oil, k-coolant, fuel tank For Engine pumpset Rs.30,000/	.30,000/- for eachset plus GST Extra	To the state of th	
AS AND CONDTIONS				
oe and duties	GST Extra @18 %			
	UPTO Site			
>0	Ready stock subject to prior sales	ales		
LIVERT	100%advance against Proforma invoic	a invoice before dispatch		
TMEIN	10Days			
LIDILI	12Months fromt he date of Invoice	oice		
Thanking you sir,				
Yours faithfully,				
For pump engineering enterprises	nterprises			
ff: No: # 30/21/35, Eluru Roa	ad Off: No: #30/21/35, Eluru Road,Old Employment Office Road, Chuttugunta, Vijayawada-4	ınta, Vijayawada-4		
9096667733 : e-mail:raghukumar35@yahoo.com	umar35@yahoo.com			
N 'SELECTION OF THE PROPERTY IN	SOSSOCIATION CONTROL OSKAR' Motors   Pumps   Transformers   VCB   SF6 Breakers   DG Sets   Spares	3F6 Breakers I DG Sets I Spares		
ed Dealers for Kinkessier.	norised Dealers IOI Nincommer Temple Nathaiahpalem	ahpalem MainRoad, VISAKHAPATNAM		

Rest of

## CW, HVDERABAD FIRE FIGHTING WORKS

	SCHEDULE OF SULL	V		FIREF	IGHTING W
	SCHEDULE OF QUANTITIES FOR F	RE PRO	TECTIO	ON SYSTI	FM
S.NO	DESCRIPTION			-,011	-141
SUR L		QTY	UNIT	RATE	AMOUNT
1001	HEAD A: MAIN FIRE PUMPS AND EQUIPME	NT			
1	Supply, installation, testing and commissioning of electrically driven factory assembled multistage, centrifugal fire hydrant / sprinkler pump set, suitable for automatic / manual operation consisting of the following:				
b b b b b b b b b b b b b b b b b b b	Horizontal, split casing high pressure multistage, centrifugal pump, suitable for operation on 415 volts ± 6%, 3 phase, 50 HZ A.C supply. Fire pump shall have C.I. casing, CS diffusers, pronze impeller (hard finished and dynamically balanced) and S.S. (304) Shaft with mechanical ressure gauge with gun metal shut off cock on elivery side. (The pump should be tested for ench mark at factory and shall be approved by the Local fire Authority).  Quirrel cage induction motor, suitable for peration on 415 volts, 3 phase 50 HZ A.C apply, for the above pump conforming to IP 55 otection & class F insulation. The motor shall inform to IS 325-1978 (up to date) with flexible upling and coupling guard, complete as quired.				
Cor M.S	mmon base plate for pump and motor from S. Channel for required size.				
(des Con arra	stable RCC / cement concrete foundation with ster and MS angle epoxy coated edging sign and drawing to be provided by the tractor. Complete with anti-vibration ngement of cushy foot mountings.				
ricat	p capacity - <u>2280</u> LPM	_	-		
RPM	- 2900				
Electr	rically drives	-			
	rically driven pump described as above 2	Set	+		
operat	esel Engine driven factory assembled fire set suitable for automatic / manual tion comprising of the following and ming to BS 649/IS 10002				

## GV1, HYDERABAD FIRE FIGHTING WORKS

S.NO	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
a.	Horizontal, split casing, high pressure multistage, centrifugal pump, suitable for operation on 415 volts ± 6%, 3 phase, 50 HZ A.C supply. The installation shall be complete with flexible coupling and coupling guard as required. Fire pump shall have C.I. casing, CS diffusers, bronze impeller (hard finished and dynamically balanced) and SS (304) shaft with mechanical seal. The installation shall be complete with necessary pressure gauge with gun metal shut off cock on delivery side (The pump should be tested for bench make at factory and shall be gotten approved by the Local fire		Onn	NATE	AMOUNT
b.	Authority).  Heat exchanger cooled (secondary cooling) diesel engine with automatic / manual starting mechanism and other accessories with fuel tank (fabricated from 3mm MS sheet, painted with two coats of synthetic enamel paint over a coat of primer) of capacity for 8 hours continuous working. The tank shall be fitted with Magnetic oil level indicator, MH with cover, drain valve, air vent including structural supports (painted with approved shade), 2 Nos. x 12 volt battery, heat exchanger with necessary piping connections & fittings, flexible coupling, coupling guard & exhaust pipe connection complete as required.				
C.	Common base plate for pump and motor from M.S. channel of required size.				
d.	Suitable cement concrete foundation with plaster and MS angle epoxy coated edging complete with antivibration arrangement of cushy foot mountings.				
	Pump capacity - 2280 LPM		-		
	Head -80 M				
	RPM - 2900				
	Diesel driven pump described as above	1	Set	-	+
3	Supply, installation, testing and commissioning of jockey / down comer pump comprising of the following:				
а.	Vertical Multistage centrifugal pump, suitable for				
	operation on 415 volts ± 6%, 3 phase, 50 H A.C supply. The installation shall be comple	IZ te			
1	with Flexible coupling and coupling guar	d			

## GV1, HYDERABAD FIRE FIGHTING WORKS

S.NO	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
	The pump shall be complete in S.S. The pump shall be provided with mechanical seal The system shall be complete with necessary pressure gauge with gun metal shut off cock on delivery side.				
b.	Squirrel cage TEFC induction motor TEFC type for operation on 415 V, 3 phase 50 HZ AC supply for the above pump with flexible coupling and coupling guard etc. as required.				
C.	Common base plate for (a) and (b) from M.S. channel as required size.				
d.	Suitable cement concrete foundation with plaster and MS angle epoxy coated edging, complete with Anti vibration arrangement of cushy foot mounting.				
	For pump defined above & of duty as follows :				
i.	Jockey pump				
	Flow: 180 LPM Head: 80 mts RPM - 2900	2	Sets		
ii.	Down Comer pump including electrical starter panel for pump, pressure switch, cabling upto motor as per manufacturer specifications and automation.				
	Flow: 900 LPM Head: 35 mts RPM - 2900	1	Set		
4	Providing and fixing rock wool sectional pipe insulation of density 144 Kg/Cu.m for fire pump exhaust pipes & fittings over a coat of Primer held in position with GI bands of 20 mm x 24 SWG at 300 centre to centre complete as required.				
	a) For 200 mm dia pipe - SP insulation 40 mm thick	50	RM		

## GV1, HYDERABAD FIRE FIGHTING WORKS

S.NO	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
5	Providing, fixing, testing and commissioning of FRP precharged air vessel of 300 liters capacity for pressurization of hydrant / sprinkler system complete with adequate pressure switches (as per design / requirement) with valves to operate as per operating sequences including 25 mm dia drain valve, air release valve with stop cock on the top, 65 mm dia inlet with isolating valve duly painted from inside and outside complete as required. (The vessel should be suitable of working pressure of 15 Kg/Sqcm including synthetic enamel paint over a coat of primer).	2	No.		
	Note:				
	Contractor shall include in his rates for providing level controllers, pressure switches, wiring, cabling from level controller / pressure switch to panel etc. complete as required to operate the system automatic/manual. Pump shall be protected against running dry.				
	TOTAL CARRIED TO SUMMARY			MEN JET	

DESCRIPTION OF ITEM	,	Fire Pumps for Cresentia Labs Pvt Ltd - Lurkapally		
Description	1. Electric Driven Main Fire Pump	2. Diesel Engine Pump	3. Jockey Pump	4. BOOSTER PUMP
Company Name		M/s Crescentia Labs Private Limited	s Private Limited	
SO No.		OUR REF. NO:DQH/2K2311154R3/NMG/5SA	311154R3/NMG/55A	
Quantity	2	1	2	3
OPERATING DATA				
Fluid Handled	WATER	WATER	WATER	WATER
Temperature (sc)	40	40	40	40
Sp. Gravity	1	1	1	r
Capacity(m³/hr)	137 (2280 LPM)	137 (2280 LPM)	10.8(180 LPM)	54 (900 LPM)
Total Head(m)	80	80	80	35
PUMP TYPE & SIZE	ETN 100-080-250 GI	ETN 100-080-315 GI	MovitecVCF010/11-B	ULTRA-210 3025PN 7.5 KW 10 HP
DESIGN	Horizontal, end suction, centritugal, radially split volute casing pumps in back-pull-out design fitted with single stage radial impeller.	Horizontal, end suction, centrifugal, radially split volute zasing pumps in back-pull-out design fitted with single stage radial impelier.	Multi-stage, vertical inline high-pressure centrifugal pumps in ring-section design.	Horizontal, single stage monobloc centrifugal pump
MDCHREM ( ARCOLLTE)	4.06	2.83	2.01	
Sceedfrom	2969	2300	2888	2900
Efficiency(%)	77.3	75.3	67.1	
Power Absorbed(kW)	38.55	39.62	3.74	4.9
Shut-off head	85.57	83.72	127.52	
Impeller Type	CLOSED	CLOSED	CLOSED	CLOSED
Impeller Diameter	240	309	96	Full Dia
Pump Suction Nozzle Size /	100/80	100/80	40/40	75/65
Recommended Pipe Size	DN 150 / DN 100	DN 150 / DN 100	DN 40/ DN 40	DN 100/ DN 80
Pump Flange Standard	ASME 8 16.1_Cl. 125	ASME B 16.1_CL 125	ASME B16.1 CL#250	,
MOC				
Pump Casing	ū	ס	ō	ū
Shaft	TYPE 410H	TYPE 410H	Type 431	Type 410
Impeller	Bronze	Bronze	Stainless steel 1.4301	0
Sealing Type	Mechanical Seal	Mechanical Seal	Inbuilt Mecahnical Seal	Gland Packing
MOTOR DATA			The state of the s	to handle Will Manager
Make	ABB	KOEL	Inbuilt KSB Motor	Inbulk Ase Motor
Type	IE2 , NPLP, TEKC, Suitable for Operation on 415 Volts, 3 Phase 50 Hz, AC Supply, IP 55 Enclosure, Foot mounted, Class-F Insulation	4R1D40T	iE2 , NFB, TEFC, Suitable for Operation on 415 Volts, 3 Phase 50 Hz, AC Supply, IP 55 Enclosure, Flange mounted, Class-F Insulation	IE 2, NFLP, TEFC, Suitable for Operation on 415 Volts, 3 Phase 50 Ht, AC Supply, IP 55 Enclosure, Foot mounted, Class F Insulation
kW Rating/IEC Frame Size	55 KW / 75 HP / 2258	97 HP @ 2300 RPM	4 KW / 5 HP / 112M	7.5 KW / 10 HP
Coupling & Coupling Guard	M.S. Fabricated Common Baseplate with Coupling & Coupling Guard	M.S. Fabricated Common Baseplate with Coupling & Coupling Guard		
PRICE In Rs.				
Unit Item Price in Rs.	₹2,03,037	₹4,43,577	T 57,854	₹ 49,842
Total Item Price in Rs.	₹ 5,55,640	₹4,43,577 # 12,48.451	₹ 1,15,708	17,49,526
Total Amount		4 14,0	4,434	

1. Electrical Driven Fire Pump: Pump with Mechanical Seal, Motor, Base frame, Coupling, Coupling, GUARD. & foundation Bolts.

2. Diesel Engine Driven fire pump: Pump with Mechanical Seal., Coupling, Coupling Guard, Foundation bolt, Radiator cooled Diesel Engine, Single Battery , 1 Charger, 1 Silencer, Floor mounted 200 liters diesel tank with level Indicator (Without Any Consumables Like Diesel, Engine Oil & Coolant, Etc).

3. Jockey Pump: Pump with Inbuilt Mechanical Seal & Motor.

4. Booster Pumpset with Motor. (Other accessories are not in our scope of supply)

#### Performance curve



Customer item no.: Communication dated: Doc. no.: Quick quote

Quantity: 1


Number: ES 8002320608

Item no.:300 Date: 20/12/2023 Page: 3 / 10

Version no.: 1

#### ETN 100-080-250 GISCP1CGA305502B

Low-pressure centrifugal pump Etanorm

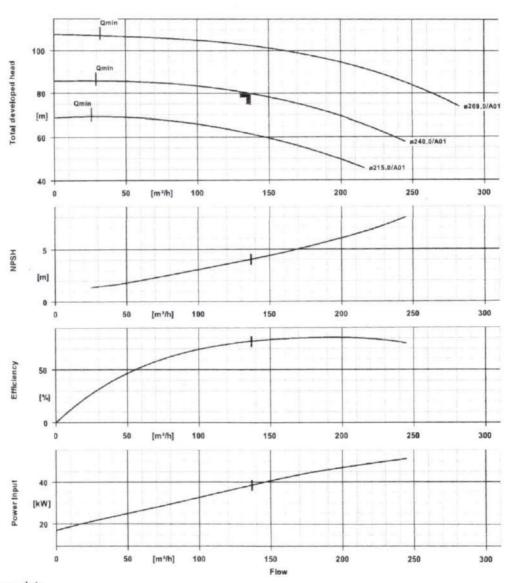

#### Curve data

Speed of rotation	2969 rpm
Fluid density	998 kg/m <sup>3</sup>
Viscosity	1.00 mm <sup>2</sup> /s
Flow rate	136.98 m <sup>3</sup> /h
Requested flow rate	137.00 m <sup>3</sup> /h
Total developed head	79.98 m
Requested developed head	80.00 m

Efficiency	77.3 %
MEI (Minimum Efficiency	≥ 0.70
Index)	
Power absorbed	38.55 kW
NPSHR	4.06 m
Curve number	K1311.452/42
Effective impeller diameter	240,0 mm

#### Performance curve



Customer item no.: Communication dated: Doc. no.: Quick quote

Quantity: 1


Number: ES 8002320608

Item no.:400 Date: 20/12/2023 Page: 8 / 10

Version no.: 1

#### ETN 100-080-315 GISCP1CGA605502B

Low-pressure centrifugal pump Etanorm

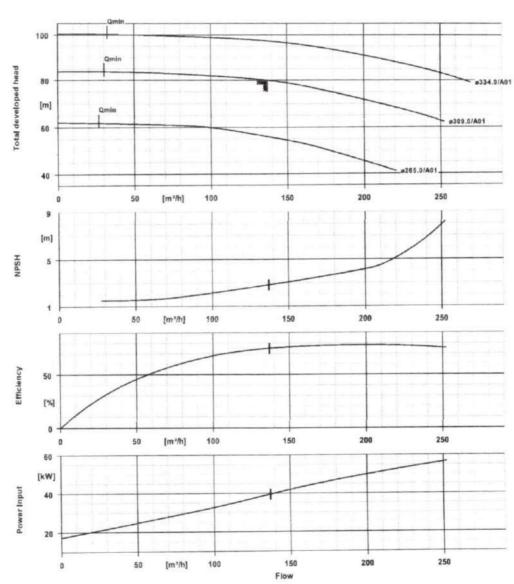

#### Curve data

Speed of rotation	2300 rpm
Fluid density	998 kg/m <sup>3</sup>
Viscosity	1.00 mm <sup>2</sup> /s
Flow rate	137.01 m <sup>3</sup> /h
Requested flow rate	137.00 m <sup>3</sup> /h
Total developed head	80.02 m
Requested developed head	80.00 m

75.3 %
≥ 0.70
39.62 kW
2.83 m
K1311.452/43
309.0 mm

#### Performance curve



Customer item no.:3, JOCKEY Communication dated:

Doc. no.: Quick quote

Quantity: 1


Number: ES 8002679155

Item no.:500 Date: 10/11/2023 Page: 23 / 26

Version no.: 1

#### MovitecVCF010/11-B2A18ES040F5Q

High pressure Inline Pump

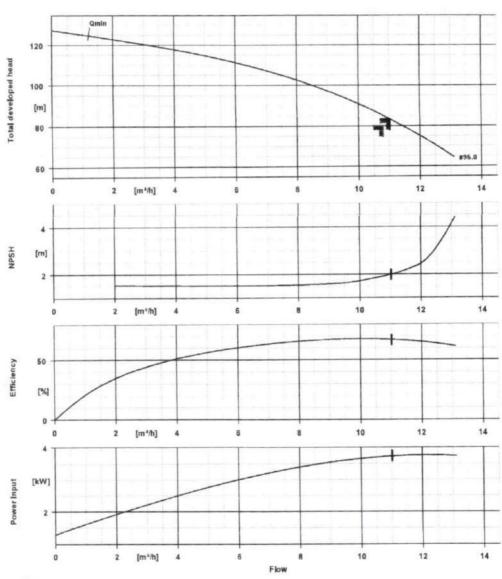

#### Curve data

Speed of rotation	2888 rpm
Fluid density	1000 kg/m <sup>3</sup>
Viscosity	1.00 mm <sup>2</sup> /s
Flow rate	11.03 m <sup>3</sup> /h
Requested flow rate	10.80 m <sup>3</sup> /h
Total developed head	83.39 m

Requested developed head 80.00 m
Efficiency 67.1 %
Power absorbed 3.74 kW
NPSHR 2.01 m
Curve number Mov10TNG2900/2
Effective impeller diameter 96.0 mm

#### **PUMP ENGINEERING ENTERPRISES**

Authorized Dealer for 'KIRLOSKAR' & CROMPTON Motors | Pumps | Transformers | LBS | VCB | SF6 Breakers | DGSETS | MEI Starters.

Head Off: #30/21/35, Eluru Road, Old Employment Office Road, Chuttugunta, Vijayawada-4 Ph: 8096667722, Email: pumpengineeringenterprises@gmail.com



	GSTIN: 37AEKPG4624C1ZS	
CUSTOMER NAME	M/s.Crescentia Labs Pvt Ltd.	
Project name &Project Location		
Quote Number	REF:PEE:ES:H809.6715/23-24	
Date	Wednesday, December 20, 2023	

ate	vvednesday, December 20, 2023			
		echno-commercial offer		
Application	Electrical Main pump	Jockey pump	DIESEL Engine Driven	Booster pump
Make	Kirloskar	Kirloskar	Kirloskar	Kirloskar
Liquid Type	Clear Water	Clear Water	Clear Water	Clear Water
Specific Gravity	1.00	1.00	1.00	1.00
Temperature	Ambient	Ambient	Ambient	Ambient
Flow (cum/hr)	137cum/hr(2280lpm)	10.8cum/hr(180lpm)	137cum/hr(2280lpm)	54cum/hr(900lpm)
Head (mtr.)	80	80	80	35
Pump Model	DB80/26Xe	DB32/26Xe	GK80/32B	KDS-1348+
Type of Pump	Centrufugal Horizontal Endsuction pump	Centrufugal Horizontal Endsuction pump	Centrufugal Horizontal endsuction pump	Monobloc pumpset
Suc X Del (mm)	100X80	50 X 32	125 X 80 mm	80 X 65
No of Poles	2	2	NA	2
RPM	2900	2900	2300	2900
Frequency/Phase	50Hz/3phase	50Hz/3phase	12 Volts	50Hz/3phase
Stages	Single Stage	Single Stage	Single Stage	Single Stage
Motor Make/Efficiency	Siemens/CGL/BBL/IE2	CGL/BBL/IE2	KOEL	Kirloskar
Motor Power (Kw)/Engine HP	45KW/60HP	9.3KW/ 12.5Hp	69BHP	9.3KW/ 12.5Hp
Engine make / Model/Cooling type	NA	NA	4R1040	NA
Accessories	pump, Motor Base frame coupling Coupling guard and Foundation Bolts	pump, Motor Base frame coupling ,Coupling guard and Foundation Bolts	pump, Engine Base frame coupling ,Coupling guard and Foundation Bolts	Monobloc pumpset
Seal/Gland Packing	Gland Pack	Gland Pack	Gland Pack	Gland Pack
Impeller	Bronze	Bronze	Bronze	CI
Price bid	1,89,000	78,000	4,35,000	48,300
Qty of Pumps	2	2	1	3
Total Price	3,78,000.00	1,56,000.00	4,35,000.00	1,44,900.0

Note: Battery,leads,k-oil, k-coolant, fuel tank For Engine pumpset Rs.38,000/- for eachset plus GST Extra

#### TERMS AND CONDTIONS

1.Taxes and duties

2. FOR

3. DE IVERY

4.PAMENT

5.VALIDITY **6 WARRANTY** 

₩jayawada

Ready stock subject to prior sales

100%advance against Proforma invoice before dispatch

12Months fromt he date of Invoice

For pump engineering enterprises

Thanking you sir, Yours faithfully,

Head Off: No: #30/21/35, Eluru Road,Old Employment Office Road, Chuttugunta, Vijayawada-4

PH: 8096667733 : e-mail:raghukumar35@yahoo.com

Authorised Dealers for 'KIRLOSKAR' Motors | Pumps | Transformers | VCB | SF6 Breakers I DG Sets I Spares

Branch: 32-2-28, Chandrasekhar Theatre Road, Near: Bangaramma Temple, Nathaiah palem Main Road, VISAKHAPATNAM



## GOVERNMENT OF TELANGANA STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT NO OBJECTION CERTIFICATE



From
The Director General
State Disaster Response and Fire Services,
Telangana, Hyderabad.

To,
MS.CRESCENTIA LABS PRIVATE LIMITED REP BY
ITS DIRECTOR SRI. SOHAM MODI,
PLOT.NO.15-B,
MN PARK,
PHASE-I,
IN SY.NOS. 230 TO 243,
TURKAPALLY VILLAGE,
SHAMIRPET MANDAL,
MEDCHAL- MALKAJGIRI DIST,
TELANGANA.,

ACK. No. 458840002022 Dated: 23/08/2022

Sir.

Sub: TELANGANA STATE DISASTER RESPONSE & FIRE SERVICE DEPARTMENT—
Issue of Provisional No Objection Certificate for proposed construction of Multi storied
Building of LAB BUILDING, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS.
230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHALMALKAJGIRI DIST, TELANGANA. /-Turkapally/Shamirpet/Medchal, —
Regarding.



Ref. Report of the Multi storeyed building inspection committe Kukatpally .

\*\*\*\*

- 1) The Multi Storeyed Building Inspection Committee, vide reference cited has inspected the site and scrutinized the plans/drawings of the proposed Multi Storeyed Building of LAB BUILDING, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL-MALKAJGIRI DIST, TELANGANA. /-Turkapally/Shamirpet/Medchal
- 2) The Multi-Storeyed Building Inspection Committee has recommended for the issuance of Provisional No Objection Certificate to the proposed Multi-Storeyed Building LAB BUILDING, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL-MALKAJGIRI DIST, TELANGANA. /-Turkapally/Shamirpet/Medchal with 1 Cellars, 1 Stilts, 4 Floors, floors with a height of 26.70 meters for BUSINESS E-2 Laboratories, research establishments, libraries and test houses. Occupancy being constructed by MS.CRESCENTIA LABS PRIVATE LIMITED REP BY ITS DIRECTOR SRI. SOHAM MODI, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL-MALKAJGIRI DIST, TELANGANA.
- 3) The Provisional No Objection Certificate is issued to the proposed Multi-Storeyed Building LAB BUILDING, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA. /-Turkapally/Shamirpet/Medchal with 1 Cellars, 1 Stilts, 4 Floors, floors with a height of 26.70 metres for BUSINESS E-2 Laboratories, research establishments, libraries and test houses. Occupancy being constructed by M/s. MS.CRESCENTIA LABS PRIVATE LIMITED REP BY ITS DIRECTOR SRI. SOHAM MODI, PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA., as per Section 13 (1) of Telangana Fire Service Act, 1999.
- 4) The Builder has to follow the following Act/Rules/Regulations:

#### I. Telangana Fire Service Act, 1999:

As per Section 31 of "whoever willfully contravenes any provisions of this Act or the rules made there under or fails to comply with any requisition lawfully made upon him under any provisions of this Act shall, without prejudice to any other action taken against him under Section 22 be punishable with imprisonment for a term which may extend to three

months or with fine which may extend to twenty five thousand rupees or with both; and where the offence is a continuing one, with a further fine which may extend to three thousand rupees for every day during which such offence continues after the conviction for the first such offence..

Rule 15(4) During the process of construction, the Director General shall depute a member of the service to conduct such inspection of the construction and note the deviations from Provisional No-Objection Certificate or National Building Code or any other rules for the time being in force that may be observed and instruct for necessary corrections, without relaxing any rule. Such deviations shall be brought to the notice of the party, acknowledgement obtained and copy of same sent to the Director General of Fire Service. The responsibility of full compliance with the rules remains with the owners/technical persons as stipulated in National Building Code on Building rules or any other rules for the time being in force.

#### II. Municipal Corporation Building Bye-Laws, 1981:

As per Bye-Law 12 "On completion of the building work, the licensed technical personnel shall give notice to the Authority in prescribed form in pursuance of sub-section (1) of Section 455 of the Act.

"The Builder, on completion of the Building and before occupation, should intimate the Director General of Fire Services for inspection and issue of "No Objection Certificate".

As per Bye-law 13.1 "No building erected, re-erected or altered materially shall be occupied in whole or in part until the issue of an Occupancy Certificate by the authority affirming that such building is fit for occupation".

#### III. National Building Code of India:

As per Clause 13.1 of Part-II of the National Building Code of India "Neither the granting of the permit nor the approval of the drawings and specifications, nor inspections made by the Authority during erection of the building shall in any way relieve the owner of such building from full responsibility for carrying out the work in accordance with the requirements of the National Building Code of India.

"The building should not be occupied without "No Objection Certificate" from the Fire Services Department.

IV.The building should not be occupied without "No Objection Certificate" from the Fire Services Department: The registered architect, engineer, structural engineer, supervisor, town planner, landscape architect, urban designer and utility service engineer (see Annex A) responsible for the services rendered for supervision of the construction/development and for the completion certificate; in the event of violation of the provisions of the Code, shall be liable to penalties as prescribed by the Authority including cancellation of registration done by it or make such recommendation to the statutory body governing such profession.

#### V. G.O.Ms.No.75 HOME (LEGAL) DEPARTMENT, dt.17-11-2015:

The Director General or any member of the Service duly authorized by him in this behalf, shall within sixty days of receipt of such application or on inspection being satisfied about the provision of Fire prevention and Safety measures as stipulated in the National Building Code of India, as amended from time to time and for ensuring heights and setbacks as per the Hyderabad Municipal Corporation Act, 1955, Telangana Urban areas (Development), 1975, Hyderabad Metropolitan Development Authority (HMDA) Act, 2008, Telangana Municipal Corporations Act, 1994, Telangana Municipalities Act, 1965, Andhra Pradesh Town Planning Act, 1920 and Rules, made there under as amended from time to time shall issue a no objection certificates with such conditions as may be considered necessary and if not so satisfied, reject the same for reasons to be recorded in writing

#### VI. G.O.Ms.No.168 MA&UD (M1) Department, dt. 07/04/2012.:

Rule 15 (b) (ii) Such buildings shall be undertaken by owners by engaging registered architect, licenced builders / developers and licenced structural engineers. The designs and building plans shall be countersigned by the owner, licenced developer, registered architect, licenced engineer and a qualified & licenced Structural Engineer who shall be responsible for the supervision, structural safety, fire safety and specifications compliance of such buildings. Rule 15 (b)(iv) These buildings shall be planned, designed and constructed to ensure fire safety requirements are met and maintained and shall comply in accordance with the Fire Protection Requirements of National Building Code of India (NBC)/Telangana Fire Services Act, 1999 Rule 15 (b) (v) The Facilities for providing Fire protection and Fire Fighting facilities in such buildings should be in compliance with the stipulations laid down and clearance issued by the Telangana State Disaster Response & Fire Services Department from time to time. No Objection Certificate (NOC) from the Telangana State Disaster Response & Fire Services Department shall be obtained from time to time regarding the fire safety requirements and facilities installed. The designs and installations regarding fire protection and safety measures including exit requirements and smoke containment and smoke management shall be undertaken through a

Fire Engineer/Fire Consultant. The builder has requested to issue Provisional No Objection certificate vide reference cite for construction of Multi Storeyed Building with 1 Cellars, 1 Stilts, 4 Floors, with a height of 26.70 Meters for BUSINESS E-2 Laboratories, research establishments, libraries and test houses.

5) Open Spaces & Gate Width:

	Sl.No	G.O.Ms.No.168 MA&UD (M) Dept, Dt.07-04-2012	Required	Proposed
a)	1	North	8.00	9.00
	2	South	8.00	10.00
	3	East	8.00	10.00
	4	West	8.00	9.00

#### This is not stepped type building.

SI. No	Gate Width As per NBC 2016	Required	Proposed
1	Entry gate width	6.00	6.0
2	Entry Gate Head Clearance	4.50	4.5
3	Exit Gate Width	6.00	6.0
4	Exit Gate Head Clearance	4.50	4.50

6. Travel Distance

Sl. No.	Item / Description	Required (Not More than in Mtrs.)	Proposed
1	Farthest point (Most Remote Point) With in a storey or a mezzanine floor to the door to an Exit.	45.00	26.00
2	The Dead end of the corridor length in exit access. (6 mtrs for Educational, Institutional and Assembly, 15mtrs for other Occupancies)	15.00	14.55

7. Stair Cases (As per NBC 2016)

Sl.no.	Type of staircases	Width (In Mtrs)	No of staircases	Floors from	Floors to
1	Ramp(Used for Movement of vehicles)	7.20	1	Cellar	Stilt
2	Internal staircases	1.50	2	Cellar	Terrace
3	External staircases	1.50	2	Cellar	Terrace

8) Means of Escape (Stair Cases) Floor Wise Details

Sl.no	Floo r type	Buil-up Area in Sq.Mtrs	Type of Occupancy	Occupan t Load	Means of escape required as per table 21 of NBC	Means of escape proposed
1	Cella r	3161.22	Parking	105.00	1.05	13.20
2	Stilt	2651.61	Parking	88.00	0.88	6.00
3	lst Floor	2689.32	BUSINESS E-2 Laboratories,			6.00
4	2nd Floor	2661.13	BUSINESS E-2 Laboratories, research establishments, libraries 266.00 2.66 and test houses.		6.00	
5	3rd Floor	2634.35	and test houses.		6.00	
6	4th Floor	2634.35	BUSINESS E-2 Laboratories, research establishments, libraries and test houses.	263.00	2.63	6.00

9). Fire Shaft as per clause 2.24 and ANNEX E (E-2) of part 4 NBC 2016.

Item / Description	Required	Proposed	
Fire Shaft	2	2	

10). Floor Wise details of Fire Fighting Installations Proposed.

Sl.n	Floor	Fire	Hose	Automatic	Manually Operated Electronic	Automate detection and
				1	i i	i .

0	Details	Extinguish er	Reel	Sprinklers System	Fire Alarm System	alarm system
1	Cellar	32.00	4.00	352.00	4.00	39.00
2	Stilt	27.00	3.00	295.00	3.00	33.00
3	1st Floor	27.00	3.00	129.00	3.00	33.00
4	2nd Floor	27.00	3.00	127.00	3.00	33.00
5	3rd Floor	27.00	3.00	126.00	3.00	33.00
6	4th Floor	27.00	3.00	126.00	3.00	33.00

11). Fire Fighting Installations as per Table 7 of NBC 2016:

Fire Fighting System.	Required As per NBC	Proposed
Fire Extinguishers	167.00	167
First Aid Hose Reel	19.00	24
Wet Riser	3.00	4
Yard Hydrant	3.00	13
Automatic Sprinkler System	1155.00	1246
Manually Operated Electronic Fire Alarm Systems	19.00	24
Automatic Detection and Alarm System	204.00	316
Under-ground Static Water Storage Tank Combined Capacity for Wet Riser, Yard Hydrant and Sprinklers per Set of Pumps in Litres	150000.00	150000
Capacity of Terrace Tank over Respective Tower Terrace in Litres	20000.00	20000
Number of Pump Near Underground Static Water Storage Tank (Fire Pump) with Minimum Pressure of 3.5 kg/cm <sup>2</sup> at Remotest Location (Electrical)	2	2
Capacity of Electrical Pump in LPM	2280.00 🗸	2280
Number of Pump Near Underground Static Water Storage Tank (Fire Pump) with Minimum Pressure of 3.5 kg/cm^2 at Remotest Location (Diesel)	1.	1
Capacity of Diesel Pump in LPM	2280.00 🗸	2280
Number of Pump Near Underground Static Water Storage Tank (Fire Pump) with Minimum Pressure of 3.5 kg/cm <sup>2</sup> at Remotest Location (Electrical/Jockey)	2	2
Capacity of Electrical (Jockey) Pump in LPM	180.00	180
No. of Terrace Tanks over Respective Tower in ltrs	1	01

Sl.N o	Fire safety Item
1.	Floor Openings Fire Protection should be As per Clause 3.4.5.4  a) Openings in Service ducts and shafts allowing building services like cables, Electrical wirings, Telephone cables, plumbing pipes etc., shall be protected by enclosure in the form of ducts / shaft having a fire resistant's not less than 120 min.
	b) The inspection door for electrical shafts / ducts shall be not less than 120 min.
	c) Medium and low voltage wiring running in shafts / ducts shall either be armoured type or run through metal conduits.
	d) The space between the electrical cables/conduits and the walls/slabs shall be filled in by a fire stop material having fire resistance rating of not less than 120 min. This shall exclude requirement of fire stop sealing for low voltage services shaft.
	e) For plumbing shafts in the core of the building, with shaft door opening inside the building, the shafts shall have inspection doors having fire resistance rating not less than 30 min.
	vertical opening fire protection as per clause 3.4.5.6. Every vertical opening between the floors of a building shall be suitably enclosed or protected, as necessary, to provide the following:

- 2. a) Reasonable safety to the occupants while using the means of egress by preventing spread of fire, smoke, or fumes through vertical openings from floor to floor to allow occupants to complete their use of the means of egress. Further it shall be ensured to provide a clear height of 2 100 mm in the exit access.
  - b) Limitation of damage to the building and its contents.
- Electrical Installation are provided complies with as per Clause 3.4.6 (For requirements regarding installations from the point of view of fire safety, reference may be made to good practice [4(6)] and Part- 8.

Building Services, Section 2 Electrical and Allied Installations, Of the Code.) a) In general, it is desirable that the wiring and cabling are with flame retardant property. Medium and low voltage wiring running in shafts and within false ceiling shall run in metal conduit. Any 230 V wiring for lighting or other services, above false ceiling, shall have 660 V grade insulation. b) The electric distribution cables/wiring shall be laid in a separate shaft. The shaft shall be sealed at every floor with fire stop materials having the same fire resistance as that of the floor. High, medium and low voltage wiring running in shaft and in false ceiling shall run in separate shaft/conduits. c) Water mains, gas pipes, telephone lines, intercom lines or any other service line shall not be laid in the duct for electrical cables; use of bus ducts/solid rising mains instead of cables is preferred. d) All metallic items like steel structural members, etc, shall be bonded properly to the earthing system. Emergency power for fire and life safety systems should be as per Clause- 3.4.6.2 (Emergency power supplying distribution system for critical requirement for functioning of fire and life safety system and equipment 4. planned for efficient and reliable power and control supply to the following systems and equipment is provided) a) Fire pumps. b) Pressurization and smoke venting; including its ancillary systems such as dampers and actuators. c) Fire mans lifts (including all lifts). d) Exit signage lighting. e) Emergency lighting. f) Fire alarm system. g) Public address (PA) system (relating to emergency voice evacuation and annunciation). h) Magnetic door hold open devices. i) Lighting in fire command centre and security room i) Power supply to these systems and equipment shall be from normal and emergency (standby generator) power sources with changeover facility. If power supply, is from HV source and HV generation, the transformer should be planned in standby capacity to ensure continuity of power to such systems. k) Wherever transformers are installed at higher levels in buildings and backup DG sets are of higher voltage rating, then dual redundant cables shall be taken to all transformers. The generator shall be capable of taking starting current of all the fire and life safety systems and equipment as above. 1) The generator shall be capable of taking starting current of all the fire and life safety systems and equipment as above. 1) Where parallel HV/LV supply from a separate substation fed from different grid is provided with appropriate transformer for emergency, the provision of generator may be waived in consultation with the Authority. m) The power supply to the panel/distribution board of these fire and life safety systems shall be through fire proof enclosures or circuit integrity cables or through alternate route in the adjoining fire compartment to ensure supply of power is reliable to these systems and equipment n) It shall be ensured that the cabling from the adjoining fire compartment is protected within the compartment of vulnerability. The location of the panel/ distribution board feeding the fire and life safety system shall be in fire safe zone ensuring supply of power to these systems. Circuits of such emergency system shall be protected at origin by an automatic circuit breaker with its no-volt coil removed. Master switches controlling essential service circuits shall be clearly labeled. o) Cables for fire alarm and PA system shall be laid in metal conduits or armoured to provide physical segregation from the power cables Substation/Transformers fire safety should be as per Clause - 3.4.6.3 i) The substation area should be adequately ventilated. ii) An independent, ventilated or air conditioned MV panel room shall be provided on the ground level or first basement. This room shall be provided with access from outside (or through exit passageway accessible from outside). The MV panel room shall be provided with fire resistant walls and doors of fire resistance of not less than 120 min. iii) If the licensees agree to provide meters on upper floors, the licensees' cables shall be segregated from consumers. Cables by providing a partition in the shaft. Meter rooms on upper floors shall not open into staircase enclosures and should be ventilated directly to open air outside or in electrical room of 120 min fire resistant iv) Electrical MV main distribution panel and lift panels shall be provided with CO2/inert gas flooding system for all panel compartments with a cylinder located beside the panel. Oil filled substation fire safety should be as per Clause - 3.4.6.3.1 A substation or a switch-station with oil filled equipment shall be limited to be installed in utility building or in outdoor location. Such substation/utility building shall be at least 7 m away from the adjoining building(s). 6. Substation equipment (exceeding oil capacity of 2 000 litre) in utility building shall have fire rated baffle walls of 240 min rating constructed between such equipment, raised to at least 600 mm above the height of the equipment

(including height of oil conservators) and exceeding 300 mm on each side of the equipment. All transformers where capacity exceeds 10 MVA shall be protected by high velocity water spray systems or nitrogen injection system. Dry type substation fire safety should be as per Clause - 3.4.6.3.2 Transformers located inside a building shall be of dry type and all substation/switch room walls, ceiling, floor, opening including doors shall have a fire resistance rating of 120 min. Access to the substation shall be provided from the nearest fire exit/exit staircase for the purpose of electrical isolation. Standby supply should be as per clause -3.4.6.4 i) Diesel generator set(s) shall not be installed at any floor other than ground/first basement. If the same are 8. installed indoors, proper ventilation and exhaust shall be planned. The DG set room shall be separated by 120 min fire resistance rated walls and doors. ii) The oil tank for the DG sets (if not in the base of the DG) shall be provided with a dyked enclosure having a volumetric capacity of at least 10 percent more than the volume of the oil tank. The enclosure shall be filled with sand for a height of 300 mm. Lightning protection of buildings should be as per clause - 3.4.6.5 Routing of down conductors (insulated or uninsulated) of lightning protection through electrical or other service 9. shafts are not allowed as it can create fire and explosion during lightning. For details, see Part 8 .Building Services, Section 2 Electrical and Allied Installations' of the Code. Escape Lighting and Exit Signage should be as per Clause 3.4.7 Exit access, exits and exit discharge shall be properly identified, with adequate lighting maintained in the elements of the egress systems so that all occupants shall be able to leave the facility safely. Lighting should be as per Clause – 3.4.7.1 a) The exit, exit access and exit discharge systems shall be illuminated continuously. The floors of the means of 11. egress shall be illuminated at all points, including angles and intersections, in corridors and passageways, stairwells, landings of stairwells and exit. b) Emergency lighting shall be powered from a source independent of that supplying the normal lighting. c) Escape lighting shall be capable of, 1) indicating clearly and unambiguously the escape routes; 2) providing adequate illumination along such routes to allow safe movement of persons towards and through the exits; and 3) ensuring that fire alarm call points and firefighting equipment provided along the escape routes can be readily d) The horizontal luminance at floor level on the centreline of an escape route shall not be less than 10 lumen/m2. In addition, for escape routes up to 2 m wide, 50 percent of the route width shall be lit to a minimum of 5 lumen/m2. In auditoriums, theatres, concert halls and such other places of assembly, the illumination of floor exit/access may be reduced during period of performances to values not less than 2 lux e) Required illumination shall be arranged such that the failure of any single lighting unit, such as the burning out of one luminaire, will not leave any area in darkness and does not impede the functioning of the system f) The emergency lighting shall be provided to be put on within 5 s of the failure of the normal lighting supply. Also, emergency lighting shall be able to maintain the required illumination level for a period of not less than 90 min in the event of failure of the normal lighting even for smaller premises. g) Battery pack emergency lighting, because of its limited duration and reliability, shall not be allowed to be used in lieu of a diesel engine driven emergency power supply. h) Escape lighting luminaires should be sited to cover the following locations: 1) Near each intersection of corridors, 2) At exits and at each exit door, 3) Near each change of direction in the escape route, 4) Near each staircase so that each flight of stairs receives direct light, 5) Near any other change of floor level, 6) Outside each final exit and close to it, 7) Near each fire alarm call point, 8) Near firefighting equipment, and 9) To illuminate exit and safety signs as required by the enforcing authority. j) The luminaires shall be mounted as low as possible, but at least 2 m above the floor level. k) Signs are required at all exits, emergency exits and escape routes, which should comply with the graphic requirements of the relevant Indian Standards Exit passageway (at ground) and staircase lighting should be as per clause - 3.4.7.2. It is to be connected to alternative supply. The alternative source of supply may be provided by battery continuously trickle charged from 12.

the electric mains Suitable arrangements are made by installing double throw switches to ensure that the lighting installed in the staircase and the corridor does not get connected to two sources of supply simultaneously. Double throw switch shall be installed in the service room for terminating the stand-by supply as per clause -3.4.7.3. Air Conditioning, Ventilation and Smoke Control should be as per clause - 3.4.8 3.4.8.1 Air conditioning and ventilating systems shall be so installed and maintained as to minimise the danger of spread of fire, smoke or fumes from one floor to other or from outside to any occupied building or structure. Wherever batteries are provided, the same shall be segregated by 120 min fire rated construction. Ventilation to the room shall be provided as per manufacturer's instructions. Air Handling unit should be as per clause.3.4.8.2 1)3.4.8.2.1 From fire safety point of view, separate air handling units (AHU) for each floor shall be provided so as to avoid the hazards arising from spread of fire and smoke through the air conditioning ducts. The air ducts shall be separate from each AHU to its floor and in no way shall interconnect with the duct of any other floor. 15. Within a floor it would be desirable to have separate air handling unit provided for each compartment. Air handling unit shall be provided with effective means for preventing circulation of smoke through the system in the case of a fire in air filters or from other sources drawn into the system, and shall have smoke sensitive devices for actuation in accordance with the accepted standard [4(8)] and control. II) As per clause 3.4.8.2.2 Shafts or ducts, if penetrating multiple floors, shall be of masonry construction with fire damper in connecting ductwork or shall have fire rated ductwork with fire dampers at floor crossing. Alternatively, the duct and equipment may be installed in room having walls, doors and fire damper in duct exiting/entering the room of 120 min fire resistance rating. Such shafts and ducts shall have all passive fire control meeting 120 min fire resistance rating requirement to meet the objective of isolation of the floor from spread of fire to upper and lower floors through shaft/duct work. III) As per clause 3.4.8.2.3 The air filters of the air handling units shall be made of non-combustible materials. IV) Duct work should be as per clause 3.4.8.3 3.4.8.3.1 Air ducts serving main floor areas, corridors, etc, shall not pass through the exits/exit passageway/ exit enclosure. Exits and lift lobbies, etc, shall not be used as return air passage. V) As per clause 3.4.8.3.2 As far as possible, metallic ducts shall be used even for the return air instead of space above the false ceiling. VI)As per clause 3.4.8.3.3 Wherever the ducts pass through fire walls or floors, the opening around the ducts shall be sealed with materials having fire resistance rating of the compartment. Such duct shall also be provided with fire dampers at all fire walls and floors unless such ducts are required to perform for fire safety operation; and in such case fire damper may be avoided at fire wall and floor while integrity of the duct shall be maintained with 120 min fire resistance rating to allow the emergency operations for fire safety requirements. VII) As per clause 3.4.8.3.4 The ducting within compartment would require minimum fire resistance rating of 30 min. Such ducting material in substantial gauge shall be in accordance with good practice [4(9)]. If such duct crosses adjacent compartment/floor and not having fire dampers in such compartment/floor, it would require fire resistance duct work rating of 120 min. The requirements of support of the duct shall meet its functional time requirement as above. VIII)As per clause 3.4.8.3.5 The materials used for insulating the duct system (inside or outside) shall be of noncombustible type. Any such insulating material shall not be wrapped or secured by any material of combustible IX) As per clause 3.4.8.3.6 Inspection panels shall be provided in the ductwork to facilitate the cleaning accumulated dust in ducts and to obtain access for maintenance of fire dampers. X)Fire or fire/smoke dampers should be as per clause 3.4.8.4 3.4.8.4.1 These dampers shall be evaluated to be located in supply air ducts, fresh air and return air ducts/ passages at the following points: a) At the fire separation wall, b) Where ducts/passages enter the vertical shaft, c) Where the ducts pass through floors, and d) At the inlet of supply air duct and the return air duct of each compartment on every floor. XI)3.4.8.4.2 Damper shall be of motorized type/fusible link. Damper shall be so installed to provide complete integrity of the compartment with all passive fire protection sealing. Damper should be accessible to maintain, test and also replace, if so required. Damper shall be integrated with Fire Alarm Panel and shall be sequenced to operate as per requirement and have interlocking arrangement for fire safety of the building. Manual operation facilities for damper operation shall also be provided. Glazing should be as per Clause - 3.4.10 i) 3.4.10.1 The glazing shall be in accordance with Part 6 .Structural Design, Section 8 Glass and Glazing' of the 16. Code. The entire glazing assembly shall be rated to that type of construction as given in Table 1. This shall be applicable along with other provisions of this Part related to respective uses as specified therein.

ii) The use of glass shall not be permitted for enclosures of exits and exit passageway. Fire Command Centre (FCC) should be as per Clause- 3.4.12 a) Fire command centre shall be on the entrance floor of the building having direct access. The control room shall 17. have the main fire alarm panel with communication system (suitable public address system) to aid floors and facilities for receiving the message from different floors. b) Fire command centre shall be constructed with 120 min rating walls with a fire door and shall be provided with emergency lighting. Interior finishes shall not use any flammable materials. All controls and monitoring of fire alarm systems, pressurization systems, smoke management systems shall happen from this room. Monitoring of integrated building management systems, CCTVs or any other critical parameters in building may also be from the same room. c) Details of all floor plans along with the details of firefighting equipment and installations (2 sets laminated and bound) shall be maintained in fire command centre. d) The fire staff in charge of the fire command centre shall be responsible for the maintenance of the various services and firefighting equipment and installations in coordination with security, electrical and civil staff of the building. General Exit Requirements should be as per clause - 4.2 i) As per Clause 4.2.3 Every exit, exit passageway and exit discharge shall be continuously maintained free of all obstructions or impediments to full use in the case of fire or other emergency. ii) As per Clause 4.2.7 For non-naturally ventilated areas, fire doors with 120 min fire resistance rating shall be provided and particularly at the entrance to lift lobby and stair well where a .funnel or flue effect' may be created, inducing an upward spread of fire, to prevent spread of fire and smoke. iii) As per Clause 4.2.9 Doors in exits shall open in the direction of exit. In case of assembly buildings (Group D) and institutional buildings (Group C-1), exit door shall not open immediately upon a flight of stair and all such entries to the stair shall be through a landing, so that such doors do not impede movement of people descending from a higher floor when fully opened (see Fig. 4A). While for other occupancies, such doors shall not reduce the pathway in the landing by more than half the width of such staircase (see Fig. 4B). Over- head or sliding doors shall not be installed. iv) As per Clause 4.2.11 Unless otherwise specified, all the exits and exit passageways to exit discharge shall have a clear ceiling height of at least 2.4 m. However, the height of exit door shall be at least 2.0 m. v) As per Clause 4.2.16 Suitable means shall be provided so that all access controlled exit doors, turnstiles, boom barriers and other such exits shall automatically operate to open mode during emergencies like fire, smoke, acts of terrorism, etc, so that people can safely and quickly egress into safe areas outside. If required, a master controlling device may be installed at a strategic location to achieve this. vi) As per Clause 4.2.17 Penetrations into and openings through an exit are prohibited except those necessary like for the fire protection piping, ducts for pressurization and similar life safety services. Such openings as well as vertical passage of shaft through floors shall be protected by passive systems. Exit Access should be as per Clause - 4.4.1 i) In order to ensure that each element of the means of egress can be effectively utilized, they shall all be properly lit and marked. Lighting shall be provided with emergency power back-up in case of power failures. Also, exit signs of adequate size, marking, location, and lighting shall be provided so that all those unfamiliar with the location of the exits may safely find their way. ii) Exit access to fireman's lift and refuge area on the floor shall be step free and clearly signposted with the international symbol of accessibility. iii) Exit access shall not pass through storage rooms, closets or spaces used for similar purpose. Smoke control of exits should be as per Clause - 4.4.2.5 The pressure difference for staircases shall be 50 Pa. Pressure differences for lobbies (or corridors) shall be between 25 Pa and 30 Pa. Further, the pressure differential for enclosed staircase adjacent to such lobby (or corridors) shall be 50 Pa. For enclosed staircases adjacent to non-pressurized lobby (or corridors), the pressure differential shall be 50 Pa. The normal air conditioning system and the pressurization system shall be designed and interfaced to meet the requirements of emergency services. When the emergency pressurization is brought into action, the following 21. changes in the normal air conditioning system shall be effected: 1) Any re-circulation of air shall be stopped and all exhaust air vented to atmosphere. 2) Any air supply to the spaces/areas other than exits shall be stopped. 3) The exhaust system may be continued provided, i. The positions of the extraction grills permit a general air flow away from the means of egress: ii. The construction of the ductwork and fans is such that, it will not be rendered inoperable by hot gases and smoke: and iii. There is no danger of spread of smoke to other floors by the path of the extraction system which can be

ensured by keeping the extraction fans running. For pressurized stair enclosure systems, the activation of the systems shall be initiated by signalling from fire 22. alarm panel. Pressurization system shall be integrated and supervised with the automatic/manual fire alarm system for 23. actuation. Wherever pressurized staircase is to be connected to unpressurized area, the two areas shall be segregated by 120 24. min fire resistant wall. 25. Fresh air intake for pressurization shall be away (at least 4 m) from any of the exhaust outlets/grille. Smoke Control should be as per clause - 4.6 i) 4.6.1 Smoke Exhaust and Pressurization of Areas Above Ground Corridors in exit access (exit access corridor) 26. are created for meeting the requirement of use, privacy and layout in various occupancies. These are most often noted in hospitality, health care occupancies and sleeping accommodations. ii) Exit access corridors of guest rooms and indoor patient department/areas having patients lacking self preservation and for sleeping accommodations such as apartments, custodial, penal and mental institutions, etc. shall be provided with 60 min fire resistant wall and 20 min self-closing fire doors along with all fire stop sealing of penetrations. iii) Smoke exhaust system having make-up air and exhaust air system or alternatively pressurization system with supply air system for these exit access corridors shall be required. iv) Smoke exhaust system having make-up air and exhaust air system shall also be required for theatres/auditoria. Such smoke exhaust system shall also be required for large lobbies and which have exit through staircase leading to exit discharge. This would enable eased exit of people through smoke controlled area to exit discharge. v) All exit passageway (from exit to exit discharge) shall be pressurized or naturally ventilated. The mechanical pressurization system shall be automatic in action with manual controls in addition. All such exit passageway shall be maintained with integrity for safe means of egress and evacuation. Doors provided in such exit passageway shall be fire rated doors of 120 min rating. vi) Smoke exhaust system where provided, for above areas and occupancies shall have a minimum of 12 air changes per hour smoke exhaust mechanism. Pressurization system where provided shall have a minimum pressure differential of 25-30 Pa in relationship to other areas. vii) The smoke exhaust fans in the mechanical ventilation system shall be fire rated, that is, 250°C for 120 min. For naturally cross-ventilated corridors or corridors with operable windows, such smoke exhaust system or pressurization system will not be required. Smoke Exhaust and Pressurization of Areas Below Ground should be as per clause - 4.6.2 a) Each basement shall be separately ventilated. Vents with cross-sectional area (aggregate) not less than 2.5 27. percent of the floor area spread evenly round the perimeter of the basement shall be provided in the form of grills, or breakable stall board lights or pavement lights or by way of shafts. b) Alternatively, a system of mechanical ventilation system may be provided with following requirements: c) Mechanical ventilation system shall be designed to permit 12 air changes per hour in case of fire or distress call. However, for be as given in Part 8 Building Services, Section 3 Air conditioning Heating and Mechanical Ventilation of the Code. d) In multi-level basements, independent air intake and smoke exhaust shafts (masonry or reinforced concrete) for respective basement levels and compartments therein shall be planned with its make-up air and exhaust air fans located on the respective level and in the respective compartment. Alternatively, in multi-level basements, common intake masonry (or reinforced cement concrete) shaft may serve respective compartments aligned at all basement levels. Similarly, common smoke exhaust/outlet masonry (or reinforced cement concrete) shafts may also be planned to serve such compartments at all basement levels. All supply air and exhaust air fans on respective levels shall be installed in fire resisting room of 120 min. Exhaust fans at the respective levels shall be provided with back draft damper connection to the common smoke exhaust shaft ensuring complete isolation and compartmentation of floor isolation to eliminate spread of fire and smoke to the other compartments/floors. e) Due consideration shall be taken for ensuring proper drainage of such shafts to avoid insanitation condition. Inlets and extracts may be terminated at ground level with stall board or pavement lights as before. Stall board and pavement lights should be in positions easily accessible to the fire brigade and clearly marked AIR INLET or SMOKE OUTLET with an indication of area served at or near the opening. f) Smoke from any fire in the basement shall not obstruct any exit serving the ground and upper floors of the g) The smoke exhaust fans in the mechanical ventilation system shall be fire rated, that is, 250°C for 120 min. h) The smoke ventilation of the basement car parking areas shall be through provision of supply and exhaust air ducts duly installed with its supports and connected to supply air and exhaust fans. Alternatively, a system of impulse fans (jet fans) may be used for meeting the requirement of smoke ventilation complying with the following:

1) Structural aspects of beams and other down stands/services shall be taken care of in the planning and provision of the jet fans. 2) Fans shall be fire rated, that is, 250°C for 120 min. 3) Fans shall be adequately supported to enable operations for the duration as above. 4) Power supply panels for the fans shall be located in fire safe zone to ensure continuity of power supply. 5) Power supply cabling shall meet circuit integrity requirement in accordance with accepted standard [4(13)]. i) The smoke extraction system shall operate on actuation of flow switch actuation of sprinkler system. In addition, a local and/or remote .manual start-stop control/switch' shall be provided for operations by the fire fighters . j) Visual indication of the operation status of the fans shall also be provided with the remote control. k) No system relating to smoke ventilation shall be allowed to interface or cross the transformer area, electrical switchboard, electrical rooms or exits. 1) Smoke exhaust system having make-up air and exhaust air system for areas other than car parking shall be required for common areas and exit access corridor in basements/underground structures and shall be completely separate and independent of car parking areas and other mechanical areas. m) Supply air shall not be less than 5 m from any exhaust discharge openings. Fire Drills and Fire Orders should be as per clause - 4.11 Fire notices/orders shall be prepared to fulfil the requirements of firefighting and evacuation from the buildings in the event of fire and other emergency. The occupants shall be made thoroughly conversant with their action in the event of emergency, by displaying fire notices at vantage points and also through regular training. Such notices should be displayed prominently in bold lettering. For guidelines for fire drills and evacuation procedures for high rise buildings, see Annex D. Fire Extinguishers/Fixed Firefighting Installations should be as per clause - 5.1 5.1.1 All buildings depending upon the occupancy use and height shall be protected by fire extinguishers, hose reels, wet riser, down-comer, yard hydrants, automatic sprinkler installation, deluge system, high/medium velocity water spray, foam, water mist systems, gaseous or dry powder system, manual/automatic fire alarm system, etc, in accordance with the provisions of various clauses given below, as applicable: a) These fire extinguishing equipment and their installation shall be in accordance with accepted standards [4(17)]. The extinguishers shall be mounted at a convenient height to enable its quick access and efficient use by all in the event of a fire incidence. The requirements of fire extinguishers/yard hydrant systems/wet riser/downcomer installation and capacity of water storage tanks and fire pumps, etc, shall be as specified in Table 7. The requirements regarding size of mains/risers shall be as given in Table 8. The typical arrangements of down-comer and wet riser installations are shown in Fig. 13. The wet riser shall be designed for zonal distribution ensuring that unduly high pressures are not developed in risers and hose-pipes. b) First-aid firefighting appliances shall be provided and installed in accordance with good practice [4(18)]. The firefighting equipment and accessories to be installed in buildings for use in firefighting shall also be in accordance with the accepted standard [4(17)] and shall be maintained periodically so as to ensure their perfect serviceability at all times. c) Valves in fixed firefighting installations shall have supervisory switch with its signalling to fire alarm panel or to have chain(s), pad lock(s), label and tamper-proof security tag(s) with serial number to prevent tampering/unauthorized operation. These valves shall be kept in their intended open position. d) In addition to wet riser or down-comer, first- aid hose reels shall be installed in buildings (where required under Table 7) on all the floors, in accordance with accepted standard [4(19)]. The first-aid hose reel shall be connected directly to the riser/down-comer main and diameter of the hose reel shall not be less than 19 mm. e) Wet risers shall be interconnected at terrace level to form a ring and cut-off shall be provided for each connection to enable repair/ maintenance without affecting rest of the system. f) Pressure at the hydraulically remote hydrant and at the highest hydrant shall not be less than 3.5 bar. The pressure at the hydrants shall however not exceed 7.0 bar, considering the safety of operators. It may be planned to provide orifice plates for landing valves to control pressure to desired limit especially at lower levels; this could also be achieved through other suitable means of pressure reducing devices such as pressure controlled hydrant valves. g) Hydrants for firefighting and hose reels shall be located in the lobby in firefighting shaft. Those hydrants planned to be provided near fire exit staircase on the floor shall be within 5 m from exit door in exit access. Such hydrant cabinet may finish with doors to meet interior finishes with requirement of glass panel to provide visibility to the installations inside and inscribed with the word: FIRE HOSE CABINET of letter size 75 mm in height and 12 mm in width. Such door of the fire hose cabinet need not be fire resistant rated. The location of such cabinets shall be shown on floor plan and duly displayed in the landing of the respective fire exit staircase. Static water storage tanks should be as per clause - 5.1.2.1 i) firefighting shall always be available in the form of underground/terrace level static storage tank with capacity 30. specified for each building with arrangements or replenishment.

ii) Water for the hydrant services shall be stored in an easily accessible surface/underground lined reservoir or above ground tanks of steel, concrete or masonry. The effective capacity of the reservoir above the top of the pump casing (flooded suction) for various types of occupancies shall be as indicated in Table 7. iii) Water for firefighting shall be stored in two or more interconnected compartments of equal size to facilitate cleaning and maintenance of the tanks without interrupting the water availability for firefighting. iv) To prevent stagnation of water in the static water storage tank, the suction tank of the domestic water supply shall be fed only through an overflow arrangement from the fire water storage tanks to maintain the level therein at the minimum specified capacity. v) Alternatively, domestic and fire water can be stored in two interconnected compartments as mentioned above. The suction inlet(s) for the domestic water pumps shall be so located at an elevation that minimum water requirements for firefighting as stated in Table 7 will be always available for fire pumps. vi) The static storage water supply required for the above mentioned purpose shall entirely be accessible to the fire engines of the local fire service. Suitable number of manholes shall be provided for inspection, repairs, insertion of suction hose, etc. As an alternative to the arrangement of manholes to allow access from the top, suitable arrangement to enable efficient access to the tank by the firemen from the adjoining fire pump room having direct access from the ground level, shall be made. The underground fire water storage tank(s) shall not be more than 7 m in depth from the level having fire brigade draw-out connection, while the draw-out connection shall not be more than 5 m away from the tank wall. vii) The covering slab shall be able to withstand a total vehicular load of 45 t (or as applicable) equally divided as a four-point load when the slab forms a part of pathway/driveway. viii) The static water storage tank shall be provided with a fire brigade collecting head with 4 number 63 mm diameter (2 number 63 mm diameter for pump with capacity 1 400 litre/min) instantaneous male inlets arranged in a valve box at a suitable point at street level. ix) The same shall be connected to the static tank by a suitable fixed galvanized iron pipe not less than 150 mm in diameter to discharge water into the tank when required at the rate of 2 250 litre/min, if tank is in the basement or not approachable for the fire engines. x) Each of the static water storage tanks shall also be provided with a fire brigade draw out collecting head with 63 mm diameter instantaneous male draw out arranged in a valve box at a suitable point at street level. This draw out shall be connected to galvanized iron pipe of 100 mm diameter with foot valve arrangement in the tank. Firefighting pump house should be as per clause 5.1.2.2 The requirements shall be as given below: 31. a) It is preferable to install the pump house at ground level. Pump house shall be situated so as to be directly accessible from the surrounding ground level. b) Pump house shall be installed not lower than the second basement. When installed in the basement, staircase with direct accessibility (or through enclosed passageway with 120 min fire rating) from the ground, shall be provided. Access to the pump room shall not require tonegotiate through other occupancies within the basement. c) Pump house shall be separated by fire walls all around and doors shall be protected by fire doors (120 min rating). d) Pump house shall be well ventilated and due care shall be taken to avoid water stagnation. e) No other utility equipment shall be installed inside fire pump room. f) Insertions like flexible couplings, bellows, etc, in the suction and delivery piping shall be suitably planned and g) Installation of negative suction arrangement and submersible pumps shall not be allowed. h) Pump house shall be sufficiently large to accommodate all pumps, and their accessories like PRVs, installation control valve, valves, diesel tank and electrical panel. i) Battery of diesel engine operated fire pump shall have separate charger from emergency power supply circuit... j) Exhaust pipe of diesel engine shall be insulated as per best engineering practice and taken to a safe location at ground level, considering the back pressure. k) Fire pumps shall be provided with soft starter or variable frequency drive starter Automatic Sprinkler Installation should be as per clause - 5.1.3 The requirements shall be as given below: 32. a) Automatic sprinklers shall be installed wherever required in terms of Table 7 throughout the building in accordance with good practice [4(20)]. b) If selective sprinklering is adopted, there is a real danger of a fire starting in one of the unsprinklered area gathering momentum spreading to other areas and reaching the sprinklered areas as a fully developed fire. In such an event, the sprinklers can be rendered useless or ineffective. c) Automatic sprinklers shall be installed in false ceiling voids exceeding 800 mm in height. d) Installation of sprinklers may be excluded in any area to be used for substation and DG set. e) In areas having height 17 m or above such as in atria, sprinkler installations may be rendered ineffective and

hence may be avoided. f) Pressure in sprinkler system shall not exceed 12 bar or else high pressure sprinkler to be installed for ab bar operations. g) The maximum floor area on any one floor to be protected by sprinklers supplied by any one sprinkler system riser from an installation control valve shall be based on system protection area limitations considering maximum floor area on any one floor to be 4 500 m2 for all occupancies except industrial and hazardous occupancies. where Authorities shall be consulted for advice based on type and nature of risk. h) Sprinkler installation control valves, shall be installed inside the fire pump room. i) For industrial buildings, such installation control valves may be installed outside the building and Authorities shall be consulted in situations where it is not possible to locate them inside the buildings. It is advisable to provide lectrically operated siren for each valve outside the buildings in addition to water gongs in such case. i) The sprinkler flow switches provided shall be monitored by fire alarm panel. k) It is essential to make provisions for avoiding water from sprinkler/hydrant operation entering lifts and electrical rooms. 1) Ramps at all levels shall be protected with sprinklers. Automatic High Velocity and Medium Velocity Water Spray Systems should be as per clause 5.1.4 Automatic high velocity water spray or emulsifying system shall be provided for protection of outdoor and/ or indoor oil-cooled transformers as applicable in accordance with good practice [4(21)] where applicable (see 33. Annex E). Also, medium velocity water spraysystem shall be provided for tankage (where applicable), conveyors, cable galleries and other occupancies listed in good practice [4(21)]. Fire Fighting shaft should be as per E-2 of Annexure E of part 4 NBC of India 2016 EGRESS AND EVACUATION STRATEGY I) One firefighting shaft shall be planned for each residential building/tower, in an educational building/ block, and for each compartment of institutional, assembly, business and mercantile occupancy types. For other occupancy types, requirement of fire fighting shaft shall be ascertained in consultation with the local fire authority. The firefighting shaft shall necessarily have connectivity directly to exit discharge or through exit passageway (having 120 min fire resistance walls) to exit discharge. II)Staircase and fire lift lobby of a firefighting shaft shall be smoke controlled as per 4.4.2.5 and Table 6. It is recommended that the pressurization requirement for staircase in firefighting shaft and for other fire exit staircases in buildings greater than 60 m in height be evaluated to limit the force required to operate the door assembly (in the direction of door opening) to not more than 133 N to set the door leaf in motion. The aspect of pressurization, door area/width and door closure shall be planned in consideration to the above. E-2 EGRESS AND EVACUATION STRATEGY the firefighting shafts have connectivity directly to exit discharge or through exit passageway (having 120 min 35. fire resistance walls) to exit discharge. Smoke control should be as per clause 4.4.2.5 Staircase and fire lift lobby of a firefighting shaft shall be smoke controlled as per 4.4.2.5 and Table 6. the pressurization requirement for staircase in firefighting shaft and for other fire exit staircases in buildings greater than 60 m in height be evaluated to limit the force required to operate the door assembly (in the direction of door opening) to not more than 133 N to set the door leaf in motion. The aspect of pressurization, door area/width and door closure shall be planned in consideration to the above. FIRE SAFETY REQUIREMENTS FOR LIFTS should be as per clause E-3 of Annexure E of part – 4 NBC of India 2016 The provisions as given in 7.1 to 7.2.4 under fire safety requirements of lifts in high rise buildings 37. in Part 8 .Building Services, Section 5 Installation of Lifts, Escalators and Moving Walks, Subsection 5A Lifts. Of the Code shall be applicable. E-4 HORIZONTAL EXITS/REFUGE AREA Horizontal exits are through a fire door of 120 min rating in a fire resistant wall? High rise apartment buildings with apartments having balcony, need not be provided with refuge area; however apartment buildings without balcony shall provide refuge area as given above. Refuge areas for apartment buildings of height above 60 m 38. while having balconies shall be provided at 60 m and thereafter at every 30 m. The refuge area shall be an area equivalent to 0.3 m2 per person for accommodating occupants of two consecutive floors, where occupant load shall be derived on basis of 12.5 m2 of gross floor area and additionally 0.9 m2 for accommodating wheel chair requirement or shall be 15 m2, whichever is higher. E-5 ELECTRICAL SERVICES 1) the specific requirements for electrical installations in multi-storeyed buildings given in Part 8. Building 39. Services, Section 2 Electrical and Allied Installations of the Code and Section 7 of National Electrical Code 2011 are complied. II) Wherever transformers are planned at higher floors, the HT cables shall be routed through a separate shaft having its own fire resistance rating of 120 min. Wherever HT generators are planned centrally at ground or first basement level, redundant transformers and HT cables shall be planned for buildings above 60 m in height. E-6 FIRE PROTECTION

- I) for residential occupancies above 120 m in height and other occupancies above 60 m in height, the sprinklers are fed from the main and an alternate/standby riser with suitable isolation valves. (The entire sprinkler system shall be designed in accordance with good practice [4(20)].)
- II) Where the height of the building exceeds 150 m to 175 m, fire water static storage and pumps shall be required to be provided at 160 m to 180 m and thereafter at intermediate floors at higher levels enabling efficient and functional firefighting installations. The static fire water storage tanks located at such levels shall have capacity at minimum half of the storage of underground static water storage tank prescribed in Table 7. Such tanks shall be supplemented with water supplies through one working and one standby pump of capacity 2 850 litre/min with two risers at alternate locations feeding to such fire water static storage tanks. The fire pump's requirement and capacity shall also be derived for occupancy type as per Table 7 substituting the diesel pump with electrical pump. The fire pump room at such level shall have dedicated connectivity through passageway (with 120 min integrity) from the firefighting shaft. Such fire pump room shall have 120 min fire resisting wall and provided with adequate ventilation with talk-back connectivity to the main fire pump room and Fire Command Centre.
- III) The builder shall submit the compliance certificate by the respective technical consultant, Architect, structural, Electrical, HVAC Engineers and fire safety consultants.

## As per 3.4.10.2 Glass facade shall be in accordance with the following:

- a) For fully sprinklered buildings having fire separation of 9 m or more, tempered glass in a non-combustible assembly, with ability to hold the glass in place, shall be provided. It shall be ensured that sprinklers are located within 600 mm of the glass facade providing full coverage to the glass. NOTE. In case of all other buildings, fire resistance rating of glass facade shall be in accordance with Table 1.
  - b) All gaps between floor-slabs and façade assembly shall be sealed at all levels by approved fire resistant sealant material of equal fire rating as that of floor slab to prevent fire and smoke propagation from one floor to another.
  - c) Openable panels shall be provided on each floor and shall be spaced not more than 10 m apart measured along the external wall from centre-to-centre of the access openings. Such openings shall be operable at a height between 1.2 m and 1.5 m from the floor, and shall be in the form of openable panels (fire access panels) of size not less than 1 000 mm × 1 000 mm opening outwards. The wordings, FIRE OPENABLE PANEL. OPEN IN CASE OF FIRE, DO NOT OBSTRUCT. of at least 25 mm letter height shall be marked on the internal side. Such panels shall be suitably distributed on each floor based on occupant Concentration. These shall not be limited to cubicle areas and shall be also located in common areas/corridors to facilitate access by the building occupants and fire personnel for smoke exhaust in times of distress.
- 42. ATRIUM Fire safety should be as per Annexure-F (Clause-6) of part 4 NBC of India 2016

Compartmentation should be as per clause - 4.5

4.5.2 All floors shall be compartmented/zoned with area of each compartment being not more than 750 m2. The maximum size of the compartment shall be as follows, in case of sprinklered basement/building:

43.	SI. No Use		Compartment-ation Area in2			
	<ol> <li>Basement car parking</li> </ol>		3000			
	6	Business buildings	3000			
	In addition, there shall be requirement of a minimum of two compartments if the floor plate size is equal or less than the areas mentioned above. However, such requirement of minimum two compartments shall not be required, if the floor plate is less than 750 m2.  Compartmentation shall be achieved by means of fire barrier having fire resistance rating of 120 min.					

- 13. You may please note that the Builder along with Architect and Site Engineer shall be held responsible for any deviations from the Provisional No Objection Certificate issued and necessary Legal Action will be initiated as per provisions of Fire Service Act.
- 14. Additional Fire Safety Measures Recommended by the Department:

The Management shall provide all additional fire safety measures for Laboratory as per clause 6.5 of part 4 NBC of India 2016.

15. The Provisional No Objection Certificate is issued with an advice that Multi Storied Building should not be occupied and the operation should not be commenced without obtaining the No Objection certificate for Occupancy from this Department about the satisfactory installation of above fire safety measures.

## "THIS IS COMPUTER GENERATED DOCUMENT AND DO NOT REQUIRE ANY STAMP OR SIGNATURE". Response & Fire Services

Telangana, Hyderabad

Copies to:

i) The Management

ii) Multistoried Building Inspection Committee



#### **GOVERNMENT OF TELANGANA** STATE DISASTER RESPONSE & FIRE SERVICES DEPARTMENT NO OBJECTION CERTIFICATE



From

The Regional Fire Officer Central Region, State Disaster Response and Fire Services, Telangana, Hyderabad.

To.

MS.CRESCENTIA LABS PRIVATE LIMITED REP BY ITS DIRECTOR SRI, SOHAM MODI,

PLOT.NO.15-B,

MN PARK.

PHASE-I.

IN SY.NOS. 230 TO 243,

TURKAPALLY VILLAGE,

SHAMIRPET MANDAL,

MEDCHAL- MALKAJGIRI DIST,

TELANGANA,

#### RC. No. 459750002022 Dated: 22/08/2022

Sir.

Sub: TELANGANA STATE DISASTER RESPONSE & FIRE SERVICE DEPARTMENT -Kukatpally Division. Issue of Provisional No Objection Certificate for proposed construction of Non-Multi storied Building of CHEMICAL STORE, PLOT. NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA/-Turkapally/Shamirpet/Medchal, Hyderabad - Regarding.

Ref. 1. Acknowledgement No 459750002022 dt.

2. Report of the Non Multi-Storeyed Building Inspection Committee,

Hyderabad Rc. No.459750002022, dt.22/08/2022



- 1. The Non Multi Storeyed Building Inspection committee, vide reference cited have inspected the proposed Non Multi Storeyed Building of CHEMICAL STORE, PLOT. NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA/-Turkapally/Shamirpet/Medchal
- 2. The Non Multi-Storeyed Building Inspection Committee, Telangana Fire Services Department vide reference cited (2) has recommended for the issuance of No Objection Certificate to the proposed Non Multi-Storeyed Building with1 Ground, 2 Floors, floors with a height of 14.10 meters for INDUSTRIAL BUILDINGS (G2)(Moderate Hazard Occupancy being constructed by MS.CRESCENTIA LABS PRIVATE LIMITED REP BY ITS DIRECTOR SRI. SOHAM MODI,9848022432,PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA.
- 3. The No Objection Certificate is issued to the proposed Non Multi-Storeyed Building 1 Ground, 2 Floors, with a height of 14.10 metres for INDUSTRIAL BUILDINGS (G2)(Moderate Hazard ) Occupancy being constructed by M/s. MS.CRESCENTIA LABS PRIVATE LIMITED REP BY ITS DIRECTOR SRI. SOHAM MODI,PLOT.NO.15-B, MN PARK, PHASE-I, IN SY.NOS. 230 TO 243, TURKAPALLY VILLAGE, SHAMIRPET MANDAL, MEDCHAL- MALKAJGIRI DIST, TELANGANA, as per Section 13 (1) of Telangana Fire Service Act, 1999.
- 4. The Builder has to follow the following Act/Rules/Regulations:

#### I. Telangana Fire Service Act, 1999:

As per Section 31 "whoever willfully contravenes any provisions of this Act or the rules made thereunder or fails to comply with any requisition lawfully made upon him under any provisions of this Act shall, without prejudice to any other action taken against him under Section 22 be punishable with imprisonment for a term which may extend to three months or with fine which may extend to twenty five thousand rupees or with both; and where the offence is a continuing one, with a further fine which may extend to three thousand rupees for every day during which such offence continues after the conviction for the first such offence.

### II. Municipal Corporation Building Bye-Laws, 1981:

As per Bye-Law 12 "On completion of the building work, the licensed technical personnel shall give notice to the Authority in prescribed form in pursuance of sub-section (1) of Section 455 of the Act."

The Builder, on completion of the Building and before occupation, should intimate the Director General of Fire Services for inspection and issue of "No Objection Certificate".

As per Bye-law 13.1 "No building erected, re-erected or altered materially shall be occupied in whole or in part until the issue of an Occupancy Certificate by the authority affirming that such building is fit for occupation".

#### III. National Building Code of India:

As per Clause 13.1 of Part-II of the National Building Code of India "neither granting of the permit nor the approval of the drawings and specifications, nor inspections made by the Authority during erection of the building shall in any way relieve the owner of such building from full responsibility for carrying out the work in accordance with the requirements of the National Building Code of India."

The building should not be occupied without "No Objection Certificate" from the Fire Services Department.

IV. As per Clause 9.1.3 of Part II of the National Building Code of India "the Licensed Architect/Engineer/Structural Engineer/Supervisor/Town Planner shall be responsible for supervision of the construction and for the completion certificate. In the event of violation of the provisions of the code he shall be liable to penalties as prescribed by the Authority including cancellation of the Licence".

#### V. G.O.Ms.No.75 HOME (LEGAL) DEPARTMENT, dt.17-11-2015:

The Director General or any member of the Service duly authorized by him in this behalf, shall within sixty days of receipt of such application or on inspection being satisfied about the provision of Fire prevention and Safety measures as stipulated in the National Building Code of India, as amended from time to time, and for ensuring heights and setbacks as per the Hyderabad Muncipal Corporation Act, 1955, Telangana Urban areas (Development), 1975, Hyderabad Metropolitan Development Authority (HMDA) Act, 2008, Telangana Muncipal Corporations Act, 1994, Telangana Muncipalities Act, 1965, Andhra Pradesh Town Planning Act, 1920 and Rules, made there under as amended from time to time shall issue a no objection certificates with such conditions as may be considered necessary and if not so satisfied, reject the same for reasons to be recorded in wirting

## VI. G.O.Ms.No.168 MA&UD (M1) Department, dt. 07/04/2012.

Rule 15 a. (ii) Such buildings shall be undertaken by owners by engaging registered architect, licenced builders / developers and licenced structural engineers. The designs and building plans shall be countersigned by the owner, licenced developer, registered architect, licenced engineer and a qualified & licenced Structural Engineer who shall be responsible for the supervision, structural safety, fire safety and specifications compliance of such buildings. Rule 15 a.(iii) The work of the building services like sanitation, plumbing, fire safety requirements, lifts, electrical installations, and other utility services shall be executed under the planning, design and supervision of qualified and competent technical personnel..

The builder has requested to issue Provisional No Objection certificate vide reference cite for construction of Non Multi Storeyed Building with 1 Ground, 2 Floors, with a height of 14.10 Meters for INDUSTRIAL BUILDINGS (G2)(Moderate Hazard).

5. Open Spaces & Gate Width:

4.00 6.00 6.00 6.00	9.00 9.00 9.00 9.00
6.00	9.00
6.00	0.00
	19.00
Required	Proposed
6.00	6.0
4.50	4.50
6.00	6.0
4.50	4.50
	6.00 4.50 6.00

Sl. No.		Required (Not More than in Mtrs.)	Proposed
1	Farthest point (Most Remote Point) With in a storey or a mezzanine floor to the door to an Exit.	45.00	15.00
2	The Dead end of the corridor length in exit access. (6 mtrs for Educational, Institutional and Assembly, 15mtrs for other Occupancies)	15.00	5.00

7. Stair Cases (As per NBC 2016)

Sl.no	Type of staircases	Width (In Mtrs)	No of staircases	Floors from	Floors to
1	Internal staircases	1.50	1	Ground	Terrace

8. Means of Escape (Stair Cases) Floor Wise Details

Sl.n o	Floor type	Buil-up Area in Sq.Mtrs	Type of Occupancy	t Load	Means of escape required as per table 21 of NBC	Means of escape proposed
1	Groun d	158.59	INDUSTRIAL BUILDINGS (G2)(Moderate Hazard)	16.00	0.16	1.50
2	1st Floor	158.59	INDUSTRIAL BUILDINGS (G2)(Moderate Hazard)	16.00	0.16	1.50
3	2nd Floor	158.59	INDUSTRIAL BUILDINGS (G2)(Moderate Hazard)	16.00	0.16	1.50

9. Floor Wise details of Fire Fighting Installations Proposed.

Sl.n o	Floor Details	Fire Extinguish er	Hose Reel	Automatic Sprinklers System	Manually Operated Electronic Fire Alarm System	Automate detection and alarm system
1	Ground	1.00	1.00	18.00	0.00	0.00
2	1st Floor	1.00	1.00	18.00	0.00	0.00
3	2nd Floor	1.00	1.00	18.00	0.00	0.00

10. Fire Fighting Installations as per Table 7 of NBC 2016:

Fire Fighting System.	Required As per NBC	Proposed
Fire Extinguishers	3.00	3
First Aid Hose Reel	3.00	3
Down Comer	1.00	1
Automatic Sprinkler System	54.00	54
Capacity of Terrace Tank over Respective Tower Terrace in Litres	20000.00	_20000_
Pump capacity in LPM at the Terrace Tank level with min Pressure of 3.5 Kg/CM^2	900.00	900
No. of Terrace Tanks over Respective Tower in Itrs	1	01
No. of Pumps at the Terrace Tank level with min pressure of 3.5 Kg/Cm <sup>2</sup>	1	01

# 11. The builder has proposed to provide the following additional Fire Safety Requirements as per NBC part 4 of India 2016:

Sl. N	Fire safety Item
1.	Minimum exit door width for assembly buildings shall be 2.0 mtrs as per clause 6.4.2.1 (a)
2.	Every place of assembly of Sub Division D-1 shall have at least four separate exits as remote from each other as practicable as per Clause 6.4.2.1 (b)
3.	Every place of assembly of Sub Division D-2 shall be at least Two separate exits as remote from each other as practicable and if of capacity over 600, at least three exits shall be provided with each exit not less than of 2.0 m

	width as per Clause 6.4.2.1 (c)
4.	The width of the Clear aisles shall not be less than 1.2 m and be formed at right angles to the line of seating in such
4.	number and manner that no seat shall be more than seven seats away from an aisle as per Clause 6.4.2.1 (d)
5.	One cross aisle of minimum width of 1 m shall be provided for every 10 rows as per Clause 6.4.2.1 (d)
6.	The Rows of seats between aisles shall be not more than 14 seats and Rows of seats opening on to an aisle at one
0.	end only shall be not more than 7 seats as per Clause 6.4.2.1 (r)
7.	The spacing of rows of seats from back to back shall be neither less than 850mm nor less than 700 mm plus the sum of the thickness of the back and inclination of the back as per Clause 6.4.2.1 (s)
8.	The space of minimum 350mm shall be required between the back of one seat and the front of the seat immediately
0.	behind it as measured between plumb lines as per Clause 6.4.2.1 (s)
	Floor Openings Fire Protection are to be Complied As per Clause 3.4.5.4
9.	Openings in Service ducts and shafts allowing building services like cables, Electrical wirings, Telephone cables, plumbing pipes etc., shall be protected by enclosure in the form of ducts / shaft having a fire resistant's not less than 120 min.
	a) The inspection door for electrical shafts / ducts shall be not less than 120 min.
	b) Medium and low voltage wiring running in shafts / ducts shall either be armoured type or run through metal conduits.
	c) The space between the electrical cables/conduits and the walls/slabs shall be filled in by a fire stop material
	having fire resistance rating of not less than 120 min. This shall exclude requirement of fire stop sealing for low voltage services shaft.
	d) For plumbing shafts in the core of the building, with shaft door opening inside the building, the shafts shall have
	inspection doors having fire resistance rating not less than 30 min.
10	Vertical openings Fire Protection are to be Complied as per Clause- 3.4.5.6 Every vertical opening between the
	floors of a building shall be suitably enclosed or protected, as necessary, to provide the following:
	a) Reasonable safety to the occupants while using the means of egress by preventing spread of fire, smoke, or fumes
	through vertical openings from floor to floor to allow occupants to complete their use of the means of egress.
	Further it shall be ensured to provide a clear height of 2 100 mm in the exit access.
	b) Limitation of damage to the building and its contents.
11	Electrical Installation to be complied as per Clause - 3.4.6 (For requirements regarding installations from the
11	point of view of fire safety, reference may be made to good practice [4(6)] and Part- 8. Building Services, Section 2
	Electrical and Allied Installations. Of the Code.)
П	a) In general, it is desirable that the wiring and cabling are with flame retardant property. Medium and low voltage
	wiring running in shafts and within false ceiling shall run in metal conduit. Any 230 V wiring for lighting or other
	services above false ceiling shall have 660 V grade insulation.
	b) The electric distribution cables/wiring shall be laid in a separate shaft. The shaft shall be sealed at every floor
	with fire stop materials having the same fire resistance as that of the floor. High, medium and low voltage wiring
	rupping in shaft and in false ceiling shall run in separate shaft/conduits.
Г	c) Water mains, gas pipes, telephone lines, intercom lines or any other service line shall not be laid in the duct for
	electrical cables; use of bus ducts/solid rising mains instead of cables is preferred.
Т	d) All metallic items like steel structural members, etc, shall be bonded properly to the earthing system.
Г	Emergency power for fire and life safety systems to be complied as per Clause- 3.4.6.2
12	Emergency power supplying distribution system for critical requirement for functioning of fire and life safety
	system and equipment planned for efficient and reliable power and control supply to the following systems and
	equipment is provided
Г	a) Fire pumps.
	b) Pressurization and smoke venting; including its ancillary systems such as dampers and actuators.
Г	c) Fire mans lifts (including all lifts).
Г	d) Exit signage lighting.
Г	e) Emergency lighting.
Г	f) Fire alarm system.
Е	g) Public address (PA) system (relating to emergency voice evacuation and annunciation).
	h) Magnetic door hold open devices.
	i) Lighting in fire command centre and security room
	j) Power supply to these systems and equipment shall be from normal and emergency (standby generator) power
	sources with changeover facility. If power supply, is from HV source and HV generation, the transformer should be
	planned in standby capacity to ensure continuity of power to such systems.
	k) Wherever transformers are installed at higher levels in buildings and backup DG sets are of higher voltage rating,
	then dual redundant cables shall be taken to all transformers. The generator shall be capable of taking starting
	current of all the fire and life safety systems and equipment as above.
F	1) Where parallel HV/LV supply from a separate substation fed from different grid is provided with appropriate

transformer for emergency, the provision of generator may be waived in consultation with the Authority. m) The power supply to the panel/distribution board of these fire and life safety systems shall be through fire proof enclosures or circuit integrity cables or through alternate route in the adjoining fire compartment to ensure supply of power is reliable to these systems and equipment n) It shall be ensured that the cabling from the adjoining fire compartment is protected within the compartment of vulnerability. The location of the panel/distribution board feeding the fire and life safety system shall be in fire safe zone ensuring supply of power to these systems. Circuits of such emergency system shall be protected at origin by an automatic circuit breaker with its no-volt coil removed. Master switches controlling essential service circuits shall be clearly labeled. o) Cables for fire alarm and PA system shall be laid in metal conduits or armoured to provide physical segregation from the power cables Substation/Transformers fire safety to be complied as per Clause - 3.4.6.3 i) The substation area should be adequately ventilated. ii) An independent, ventilated or air conditioned MV panel room shall be provided on the ground level or first basement. This room shall be provided with access from outside (or through exit passageway accessible from outside). The MV panel room shall be provided with fire resistant walls and doors of fire resistance of not less than 120 min. iii) If the licensees agree to provide meters on upper floors, the licensees' cables shall be segregated from consumers. Cables by providing a partition in the shaft. Meter rooms on upper floors shall not open into staircase enclosures and should be ventilated directly to open air outside or in electrical room of 120 min fire resistant walls. iv) Electrical MV main distribution panel and lift panels shall be provided with CO2/inert gas flooding system for all panel compartments with a cylinder located beside the panel. Dry type substation fire safety to be complied Clause - 3.4.6.3.2 14 Transformers located inside a building shall be of dry type and all substation/switch room walls, ceiling, floor, opening including doors shall have a fire resistance rating of 120 min. Access to the substation shall be provided from the nearest fire exit/exit staircase for the purpose of electrical isolation. Standby supply to be complied clause -3.4.6.4 i) Diesel generator set(s) shall not be installed at any floor other than ground/first basement. If the same are installed indoors, proper ventilation and exhaust shall be planned. The DG set room shall be separated by 120 min fire resistance rated walls and doors. ii) The oil tank for the DG sets (if not in the base of the DG) shall be provided with a dyked enclosure having a volumetric capacity of at least 10 percent more than the volume of the oil tank. The enclosure shall be filled with sand for a height of 300 mm. Lightning protection of buildings to be complied clause - 3.4.6.5 16 Routing of down conductors (insulated or uninsulated) of lightning protection through electrical or other service shafts are not allowed as it can create fire and explosion during lightning. For details, see Part 8 .Building Services, Section 2 Electrical and Allied Installations' of the Code. Escape Lighting and Exit Signage to be complied Clause 3.4.7

Exit access evits and exit discharge to be complied Clause 3.4.7 Exit access, exits and exit discharge shall be properly identified, with adequate lighting maintained in the elements of the egress systems so that all occupants shall be able to leave the facility safely. Lighting to be complied Clause - 3.4.7.1 a) The exit, exit access and exit discharge systems shall be illuminated continuously. The floors of the means of egress shall be illuminated at all points, including angles and intersections, in corridors and passageways, stairwells, landings of stairwells and exit. b) Emergency lighting shall be powered from a source independent of that supplying the normal lighting. c) Escape lighting shall be capable of, 1) indicating clearly and unambiguously the escape routes; 2) providing adequate illumination along such routes to allow safe movement of persons towards and through the 3) ensuring that fire alarm call points and firefighting equipment provided along the escape routes can be readily d) The horizontal luminance at floor level on the centreline of an escape route shall not be less than 10 lumen/m2. In addition, for escape routes up to 2 m wide, 50 percent of the route width shall be lit to a minimum of 5 lumen/m2. In auditoriums, theatres, concert halls and such other places of assembly, the illumination of floor exit/access may be reduced during period of performances to values not less than 2 lux e) Required illumination shall be arranged such that the failure of any single lighting unit, such as the burning out of one luminaire, will not leave any area in darkness and does not impede the functioning of the system further.

- f) The emergency lighting shall be provided to be put on within 5 s of the failure of the normal lighting supply. Also, emergency lighting shall be able to maintain the required illumination level for a period of not less than 90 min in the event of failure of the normal lighting even for smaller premises.

  g) Battery pack emergency lighting, because of its limited duration and reliability, shall not be allowed to be used in lieu of a diesel engine driven emergency power supply.

  h) Escape lighting luminaires should be sited to cover the following locations:

  1) Near each intersection of corridors,

  2) At exits and at each exit door,

  3) Near each change of direction in the escape route,

  4) Near each staircase so that each flight of stairs receives direct light,
  - 5) Near any other change of floor level,
  - 6) Outside each final exit and close to it,
  - 7) Near each fire alarm call point,
  - 8) Near firefighting equipment, and
  - 9) To illuminate exit and safety signs as required by the enforcing authority.
  - j) The luminaires shall be mounted as low as possible, but at least 2 m above the floor level.
  - k) Signs are required at all exits, emergency exits and escape routes, which should comply with the graphic requirements of the relevant Indian Standards
- Exit passageway to be complied (at ground) and staircase lighting is connected to alternative supply. The alternative source of supply may be provided by battery continuously trickle charged from the electric mains as per clause 3.4.7.2.
  - Suitable arrangements to be complied are made by installing double throw switches to ensure that the lighting installed in the staircase and the corridor does not get connected to two sources of supply simultaneously. Double throw switch shall be installed in the service room for terminating the stand-by supply as per clause 3.4.7.3.

## Air Conditioning, Ventilation and Smoke Control to be complied clause - 3.4.8

- 3.4.8.1 Air conditioning and ventilating systems shall be so installed and maintained as to minimise the danger of spread of fire, smoke or fumes from one floor to other or from outside to any occupied building or structure.

  Wherever batteries are provided, the same shall be segregated by 120 min fire rated construction. Ventilation to the room shall be provided as per manufacturer's instructions.
- Air handling unit to be complied Clause -3.4.8.2
  - I)3.4.8.2.1 From fire safety point of view, separate air handling units (AHU) for each floor shall be provided so as to avoid the hazards arising from spread of fire and smoke through the air conditioning ducts. The air ducts shall be separate from each AHU to its floor and in no way shall interconnect with the duct of any other floor. Within a floor it would be desirable to have separate air handling unit provided for each compartment.

Air handling unit shall be provided with effective means for preventing circulation of smoke through the system in the case of a fire in air filters or from other sources drawn into the system, and shall have smoke sensitive devices for actuation in accordance with the accepted standard [4(8)] and control.

II)3.4.8.2.2 Shafts or ducts, if penetrating multiple floors, shall be of masonry construction with fire damper in connecting ductwork or shall have fire rated ductwork with fire dampers at floor crossing. Alternatively, the duct and equipment may be installed in room having walls, doors and fire damper in duct exiting/entering the room of 120 min fire resistance rating. Such shafts and ducts shall have all passive fire control meeting 120 min fire resistance rating requirement to meet the objective of isolation of the floor from spread of fire to upper and lower floors through shaft/duct work.

III)3.4.8.2.3 The air filters of the air handling units shall be made of non-combustible materials.

#### IV) 3.4.8.3 Duct work

- 3.4.8.3.1 Air ducts serving main floor areas, corridors, etc, shall not pass through the exits/exit passageway/ exit enclosure. Exits and lift lobbies, etc, shall not be used as return air passage.
- V)3.4.8.3.2 As far as possible, metallic ducts shall be used even for the return air instead of space above the false ceiling.
- VI)3.4.8.3.3 Wherever the ducts pass through fire walls or floors, the opening around the ducts shall be sealed with materials having fire resistance rating of the compartment. Such duct shall also be provided with fire dampers at all fire walls and floors unless such ducts are required to perform for fire safety operation; and in such case fire damper may be avoided at fire wall and floor while integrity of the duct shall be maintained with 120 min fire resistance rating to allow the emergency operations for fire safety requirements.
- VII)3.4.8.3.4 The ducting within compartment would require minimum fire resistance rating of 30 min. Such ducting material in substantial gauge shall be in accordance with good practice [4(9)]. If such duct crosses adjacent compartment/floor and not having fire dampers in such compartment/floor, it would require fire resistance duct work rating of 120 min. The requirements of support of the duct shall meet its functional time requirement as above.

VIII)3.4.8.3.5 The materials used for insulating the duct system (inside or outside) shall be of non-combustible type.

Any such insulating material shall not be wrapped or secured by any material of combustible nature. IX) 3.4.8.3.6 Inspection panels shall be provided in the ductwork to facilitate the cleaning accumulated dust in ducts and to obtain access for maintenance of fire dampers. X)3.4.8.4 Fire or fire/smoke dampers 3.4.8.4.1 These dampers shall be evaluated to be located in supply air ducts, fresh air and return air ducts/ passages at the following points: a) At the fire separation wall, b) Where ducts/passages enter the vertical shaft, c) Where the ducts pass through floors, and d) At the inlet of supply air duct and the return air duct of each compartment on every floor. XI)3.4.8.4.2 Damper shall be of motorized type/fusible link. Damper shall be so installed to provide complete integrity of the compartment with all passive fire protection sealing. Damper should be accessible to maintain, test and also replace, if so required. Damper shall be integrated with Fire Alarm Panel and shall be sequenced to operate as per requirement and have interlocking arrangement for fire safety of the building. Manual operation facilities for damper operation shall also be provided. Glazing complies with Clause - 3.4.10 i) 3.4.10.1 The glazing shall be in accordance with Part 6. Structural Design, Section 8 Glass and Glazing' of the Code. The entire glazing assembly shall be rated to that type of construction as given in Table 1. This shall be applicable along with other provisions of this Part related to respective uses as specified therein. ii) The use of glass shall not be permitted for enclosures of exits and exit passageway. Fire Command Centre (FCC) to be complied as per Clause- 3.4.12 a) Fire command centre shall be on the entrance floor of the building having direct access. The control room shall have the main fire alarm panel with communication system (suitable public address system) to aid floors and facilities for receiving the message from different floors. b) Fire command centre shall be constructed with 120 min rating walls with a fire door and shall be provided with emergency lighting. Interior finishes shall not use any flammable materials. All controls and monitoring of fire alarm systems, pressurization systems, smoke management systems shall happen from this room. Monitoring of integrated building management systems, CCTVs or any other critical parameters in building may also be from the same room. c) Details of all floor plans along with the details of firefighting equipment and installations (2 sets laminated and bound) shall be maintained in fire command centre. d) The fire staff in charge of the fire command centre shall be responsible for the maintenance of the various services and firefighting equipment and installations in coordination with security, electrical and civil staff of the building. General Exit Requirements to be complied clause - 4.2 i) 4.2.3 Every exit, exit passageway and exit discharge shall be continuously maintained free of all obstructions or impediments to full use in the case of fire or other emergency. ii)4.2.7 For non-naturally ventilated areas, fire doors with 120 min fire resistance rating shall be provided and particularly at the entrance to lift lobby and stair well where a .funnel or flue effect' may be created, inducing an upward spread of fire, to prevent spread of fire and smoke. iii)4.2.9 Doors in exits shall open in the direction of exit. In case of assembly buildings (Group D) and institutional buildings (Group C-1), exit door shall not open immediately upon a flight of stair and all such entries to the stair shall be through a landing, so that such doors do not impede movement of people descending from a higher floor when fully opened (see Fig. 4A). While for other occupancies, such doors shall not reduce the pathway in the landing by more than half the width of such staircase (see Fig. 4B). Over- head or sliding doors shall not be installed. iv)4.2.11 Unless otherwise specified, all the exits and exit passageways to exit discharge shall have a clear ceiling height of at least 2.4 m. However, the height of exit door shall be at least 2.0 m. v)4.2.16 Suitable means shall be provided so that all access controlled exit doors, turnstiles, boom barriers and other such exits shall automatically operate to open mode during emergencies like fire, smoke, acts of terrorism, etc, so that people can safely and quickly egress into safe areas outside. If required, a master controlling device may be installed at a strategic location to achieve this. vi)4.2.17 Penetrations into and openings through an exit are prohibited except those necessary like for the fire protection piping, ducts for pressurization and similar life safety services. Such openings as well as vertical passage of shaft through floors shall be protected by passive systems. Exit Access to be complied Clause - 4.4.1 i) In order to ensure that each element of the means of egress can be effectively utilized, they shall all be properly lit

and marked. Lighting shall be provided with emergency power back-up in case of power failures. Also, exit signs of adequate size, marking, location, and lighting shall be provided so that all those unfamiliar with the location of the exits may safely find their way. ii) Exit access to fireman's lift and refuge area on the floor shall be step free and clearly signposted with the international symbol of accessibility. iii) Exit access shall not pass through storage rooms, closets or spaces used for similar purpose. Smoke control of exits to be complied Clause - 4.4.2.5 The pressure difference for staircases shall be 50 Pa. Pressure differences for lobbies (or corridors) shall be between 25 Pa and 30 Pa. Further, the pressure differential for enclosed staircase adjacent to such lobby (or corridors) shall be 50 Pa. For enclosed staircases adjacent to non-pressurized lobby (or corridors), the pressure differential shall be The normal air conditioning system and the pressurization system shall be designed and interfaced to meet the requirements of emergency services. When the emergency pressurization is brought into action, the following changes in the normal air conditioning system shall be effected: 1) Any re-circulation of air shall be stopped and all exhaust air vented to atmosphere. 2) Any air supply to the spaces/areas other than exits shall be stopped. 3) The exhaust system may be continued provided, i. The positions of the extraction grills permit a general air flow away from the means of egress; ii. The construction of the ductwork and fans is such that, it will not be rendered inoperable by hot gases and smoke; and iii. There is no danger of spread of smoke to other floors by the path of the extraction system which can be ensured by keeping the extraction fans running. 29 For pressurized stair enclosure systems, the activation of the systems shall be initiated by signalling from fire alarm Pressurization system shall be integrated and supervised with the automatic/manual fire alarm system for actuation. 31 Wherever pressurized staircase is to be connected to unpressurized area, the two areas shall be segregated by 120 min fire resistant wall. Fresh air intake for pressurization shall be away (at least 4 m) from any of the exhaust outlets/grille. 33 Smoke Control to be complied clause - 4.6 i) 4.6.1 Smoke Exhaust and Pressurization of Areas Above Ground Corridors in exit access (exit access corridor) are created for meeting the requirement of use, privacy and layout in various occupancies. These are most often noted in hospitality, health care occupancies and sleeping accommodations. ii) Exit access corridors of guest rooms and indoor patient department/areas having patients lacking self preservation and for sleeping accommodations such as apartments, custodial, penal and mental institutions, etc, shall be provided with 60 min fire resistant wall and 20 min self-closing fire doors along with all fire stop sealing of penetrations. iii) Smoke exhaust system having make-up air and exhaust air system or alternatively pressurization system with supply air system for these exit access corridors shall be required. iv) Smoke exhaust system having make-up air and exhaust air system shall also be required for theatres/auditoria. Such smoke exhaust system shall also be required for large lobbies and which have exit through staircase leading to exit discharge. This would enable eased exit of people through smoke controlled area to exit discharge. v) All exit passageway (from exit to exit discharge) shall be pressurized or naturally ventilated. The mechanical pressurization system shall be automatic in action with manual controls in addition. All such exit passageway shall be maintained with integrity for safe means of egress and evacuation. Doors provided in such exit passageway shall be fire rated doors of 120 min rating. vi) Smoke exhaust system where provided, for above areas and occupancies shall have a minimum of 12 air changes per hour smoke exhaust mechanism. Pressurization system where provided shall have a minimum pressure differential of 25-30 Pa in relationship to other areas. vii) The smoke exhaust fans in the mechanical ventilation system shall be fire rated, that is, 250°C for 120 min. For naturally cross-ventilated corridors or corridors with operable windows, such smoke exhaust system or pressurization system will not be required. Smoke Exhaust and Pressurization of Areas Below Ground to be complied as per clause - 4.6.2 a) Each basement shall be separately ventilated. Vents with cross-sectional area (aggregate) not less than 2.5 percent of the floor area spread evenly round the perimeter of the basement shall be provided in the form of grills, or breakable stall board lights or pavement lights or by way of shafts. b) Alternatively, a system of mechanical ventilation system may be provided with following requirements: c) Mechanical ventilation system shall be designed to permit 12 air changes per hour in case of fire or distress call

However, for be as given in Part 8 Building Services, Section 3 Air conditioning Heating and Mechanical Ventilation of the Code.

- d) In multi-level basements, independent air intake and smoke exhaust shafts (masonry or reinforced concrete) for respective basement levels and compartments therein shall be planned with its make-up air and exhaust air fans located on the respective level and in the respective compartment. Alternatively, in multi-level basements, common intake masonry (or reinforced cement concrete) shaft may serve respective compartments aligned at all basement levels. Similarly, common smoke exhaust/outlet masonry (or reinforced cement concrete) shafts may also be planned to serve such compartments at all basement levels. All supply air and exhaust air fans on respective levels shall be installed in fire resisting room of 120 min. Exhaust fans at the respective levels shall be provided with back draft damper connection to the common smoke exhaust shaft ensuring complete isolation and compartmentation of floor isolation to eliminate spread of fire and smoke to the other compartments/floors.
- e) Due consideration shall be taken for ensuring proper drainage of such shafts to avoid insanitation condition. Inlets and extracts may be terminated at ground level with stall board or pavement lights as before. Stall board and pavement lights should be in positions easily accessible to the fire brigade and clearly marked AIR INLET or SMOKE OUTLET with an indication of area served at or near the opening.
- f) Smoke from any fire in the basement shall not obstruct any exit serving the ground and upper floors of the building.
- g) The smoke exhaust fans in the mechanical ventilation system shall be fire rated, that is, 250°C for 120 min.
- h) The smoke ventilation of the basement car parking areas shall be through provision of supply and exhaust air ducts duly installed with its supports and connected to supply air and exhaust fans. Alternatively, a system of impulse fans (jet fans) may be used for meeting the requirement of smoke ventilation complying with the following:
- Structural aspects of beams and other down stands/services shall be taken care of in the planning and provision of the jet fans.
- 2) Fans shall be fire rated, that is, 250°C for 120 min.
- 3) Fans shall be adequately supported to enable operations for the duration as above.
- 4) Power supply panels for the fans shall be located in fire safe zone to ensure continuity of power supply.
- 5) Power supply cabling shall meet circuit integrity requirement in accordance with accepted standard [4(13)].
- The smoke extraction system shall operate on actuation of flow switch actuation of sprinkler system. In addition, a local and/or remote .manual start-stop control/switch' shall be provided for operations by the fire fighters
- .j) Visual indication of the operation status of the fans shall also be provided with the remote control.
- k) No system relating to smoke ventilation shall be allowed to interface or cross the transformer area, electrical switchboard, electrical rooms or exits.
- Smoke exhaust system having make-up air and exhaust air system for areas other than car parking shall be required for common areas and exit access corridor in basements/underground structures and shall be completely separate and independent of car parking areas and other mechanical areas.
- m) Supply air shall not be less than 5 m from any exhaust discharge openings.
- Fire Drills and Fire Orders to be complied as per clause 4.11 Fire notices/orders shall be prepared to fulfil the requirements of firefighting and evacuation from the buildings in the event of fire and other emergency. The occupants shall be made thoroughly conversant with their action in the event of emergency, by displaying fire notices at vantage points and also through regular training. Such notices should be displayed prominently in bold lettering. For guidelines for fire drills and evacuation procedures for high rise buildings, see Annex D.
- Fire Extinguishers/Fixed Firefighting Installations to be complied clause 5.1 5.1.1 All buildings depending upon the occupancy use and height shall be protected by fire extinguishers, hose reels, wet riser, down-comer, yard hydrants, automatic sprinkler installation, deluge system, high/medium velocity water spray, foam, water mist systems, gaseous or dry powder system, manual/automatic fire alarm system, etc, in accordance with the provisions of various clauses given below, as applicable:
- a) These fire extinguishing equipment and their installation shall be in accordance with accepted standards [4(17)]. The extinguishers shall be mounted at a convenient height to enable its quick access and efficient use by all in the event of a fire incidence. The requirements of fire extinguishers/yard hydrant systems/wet riser/down-comer installation and capacity of water storage tanks and fire pumps, etc, shall be as specified in Table 7. The requirements regarding size of mains/risers shall be as given in Table 8. The typical arrangements of down-comer and wet riser installations are shown in Fig. 13. The wet riser shall be designed for zonal distribution ensuring that unduly high pressures are not developed in risers and hose-pipes.
- b) First-aid firefighting appliances shall be provided and installed in accordance with good practice [4(18)]. The firefighting equipment and accessories to be installed in buildings for use in firefighting shall also be in accordance with the accepted standard [4(17)] and shall be maintained periodically so as to ensure their perfect serviceability at all times.
- c) Valves in fixed firefighting installations shall have supervisory switch with its signalling to fire alarm panel or to have chain(s), pad lock(s), label and tamper-proof security tag(s) with serial number to prevent

- tampering/unauthorized operation. These valves shall be kept in their intended open position.
  - d) In addition to wet riser or down-comer, first- aid hose reels shall be installed in buildings (where required under Table 7) on all the floors, in accordance with accepted standard [4(19)]. The first-aid hose reel shall be connected directly to the riser/down-comer main and diameter of the hose reel shall not be less than 19 mm.
  - e) Wet risers shall be interconnected at terrace level to form a ring and cut-off shall be provided for each connection to enable repair/ maintenance without affecting rest of the system.
  - f) Pressure at the hydraulically remote hydrant and at the highest hydrant shall not be less than 3.5 bar. The pressure at the hydrants shall however not exceed 7.0 bar, considering the safety of operators. It may be planned to provide orifice plates for landing valves to control pressure to desired limit especially at lower levels; this could also be achieved through other suitable means of pressure reducing devices such as pressure controlled hydrant valves.
- g) Hydrants for firefighting and hose reels shall be located in the lobby in firefighting shaft. Those hydrants planned to be provided near fire exit staircase on the floor shall be within 5 m from exit door in exit access. Such hydrant cabinet may finish with doors to meet interior finishes with requirement of glass panel to provide visibility to the installations inside and inscribed with the word: FIRE HOSE CABINET of letter size 75 mm in height and 12 mm in width. Such door of the fire hose cabinet need not be fire resistant rated. The location of such cabinets shall be shown on floor plan and duly displayed in the landing of the respective fire exit staircase.

## 37 Static water storage tanks to be complied clause - 5.1.2.1

- firefighting shall always be available in the form of underground/terrace level static storage tank with capacity specified for each building with arrangements or replenishment.
- ii) Water for the hydrant services shall be stored in an easily accessible surface/underground lined reservoir or above ground tanks of steel, concrete or masonry. The effective capacity of the reservoir above the top of the pump casing (flooded suction) for various types of occupancies shall be as indicated in Table 7.
- iii) Water for firefighting shall be stored in two or more interconnected compartments of equal size to facilitate cleaning and maintenance of the tanks without interrupting the water availability for firefighting.
- iv) To prevent stagnation of water in the static water storage tank, the suction tank of the domestic water supply shall be fed only through an overflow arrangement from the fire water storage tanks to maintain the level therein at the minimum specified capacity.
- v) Alternatively, domestic and fire water can be stored in two interconnected compartments as mentioned above. The suction inlet(s) for the domestic water pumps shall be so located at an elevation that minimum water requirements for firefighting as stated in Table 7 will be always available for fire pumps.
- vi) The static storage water supply required for the above mentioned purpose shall entirely be accessible to the fire engines of the local fire service. Suitable number of manholes shall be provided for inspection, repairs, insertion of suction hose, etc. As an alternative to the arrangement of manholes to allow access from the top, suitable arrangement to enable efficient access to the tank by the firemen from the adjoining fire pump room having direct access from the ground level, shall be made. The underground fire water storage tank(s) shall not be more than 7 m in depth from the level having fire brigade draw-out connection, while the draw-out connection shall not be more than 5 m away from the tank wall.
- vii) The covering slab shall be able to withstand a total vehicular load of 45 t (or as applicable) equally divided as a four-point load when the slab forms a part of pathway/driveway.
- viii) The static water storage tank shall be provided with a fire brigade collecting head with 4 number 63 mm diameter (2 number 63 mm diameter for pump with capacity 1 400 litre/min) instantaneous male inlets arranged in a valve box at a suitable point at street level.
- ix) The same shall be connected to the static tank by a suitable fixed galvanized iron pipe not less than 150 mm in diameter to discharge water into the tank when required at the rate of 2 250 litre/min, if tank is in the basement or not approachable for the fire engines.
- x) Each of the static water storage tanks shall also be provided with a fire brigade draw out collecting head with 63 mm diameter instantaneous male draw out arranged in a valve box at a suitable point at street level. This draw out shall be connected to galvanized iron pipe of 100 mm diameter with foot valve arrangement in the tank.

## 38 Firefighting pump house to be complied clause 5.1.2.2

The requirements shall be as given below:

- a) It is preferable to install the pump house at ground level. Pump house shall be situated so as to be directly accessible from the surrounding ground level.
  - b) Pump house shall be installed not lower than the second basement. When installed in the basement, staircase with direct accessibility (or through enclosed passageway with 120 min fire rating) from the ground, shall be provided. Access to the pump room shall not require tonegotiate through other occupancies within the basement.
  - c) Pump house shall be separated by fire walls all around and doors shall be protected by fire doors (120 min rating).
  - d) Pump house shall be well ventilated and due care shall be taken to avoid water stagnation.
  - e) No other utility equipment shall be installed inside fire pump room.
  - f) Insertions like flexible countings, bellows, etc. in the suction and delivery pining shall be suitably planned and

installed.

- g) Installation of negative suction arrangement and submersible pumps shall not be allowed.
- h) Pump house shall be sufficiently large to accommodate all pumps, and their accessories like PRVs, installation control valve, valves, diesel tank and electrical panel.
- i) Battery of diesel engine operated fire pump shall have separate charger from emergency power supply circuit...
- j) Exhaust pipe of diesel engine shall be insulated as per best engineering practice and taken to a safe location at ground level, considering the back pressure.
- k) Fire pumps shall be provided with soft starter or variable frequency drive starter

39

## 3.4.10.2 Glass facade shall be in accordance with the following:

- a) For fully sprinklered buildings having fire separation of 9 m or more, tempered glass in a non-combustible assembly, with ability to hold the glass in place, shall be provided. It shall be ensured that sprinklers are located within 600 mm of the glass facade providing full coverage to the glass.
- NOTE. In case of all other buildings, fire resistance rating of glass facade shall be in accordance with Table 1.
- b) All gaps between floor-slabs and façade assembly shall be sealed at all levels by approved fire resistant sealant material of equal fire rating as that of floor slab to prevent fire and smoke propagation from one floor to another.
- c) Openable panels shall be provided on each floor and shall be spaced not more than 10 m apart measured along the external wall from centre-to-centre of the access openings. Such openings shall be operable at a height between 1.2 m and 1.5 m from the floor, and shall be in the form of openable panels (fire access panels) of size not less than 1 000 mm × 1 000 mm opening outwards. The wordings, .FIRE OPENABLE PANEL. OPEN IN CASE OF FIRE, DO NOT OBSTRUCT. of at least 25 mm letter height shall be marked on the internal side. Such panels shall be suitably distributed on each floor based on occupant Concentration. These shall not be limited to cubicle areas and shall be also located in common areas/corridors to facilitate access by the building occupants and fire personnel for smoke exhaust in times of distress.
- Whether ATRIUM Fire safety complies with as per Annexure-F (Clause-6) of part 4 NBC of India 2016
- 12. You may please note that the Builder along with Architect and Site Engineer shall be held responsible for any deviations from the provisional No Objection Certificate issued and necessary Legal Action will be initiated as per provisions of Fire Service Act.
- 13. Additional Fire Safety Measures Recommended by the Department:

0

14. The Provisional No Objection Certificate is issued with an advice that Non Multi Storied Building should not be occupied and the operation should not be commenced without obtaining the No Objection certificate for occupancy from this Department about the satisfactory installation of above fire safety measures.

Yours Sincerely, Regional Fire Officer Central Region, Response & Fire Services, Telangana, Hyderabad.

Copies to:

- i) The Management
- ii) Multistoried Building Inspection Committee

"THIS IS COMPUTER GENERATED DOCUMENT AND DO NOT REQUIRE ANY STAMP OR SIGNATURE"