
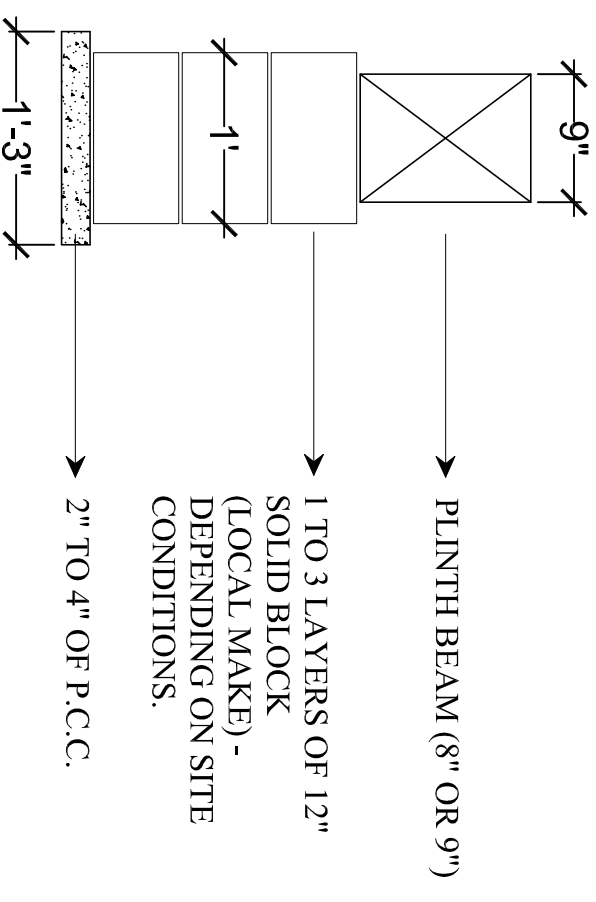


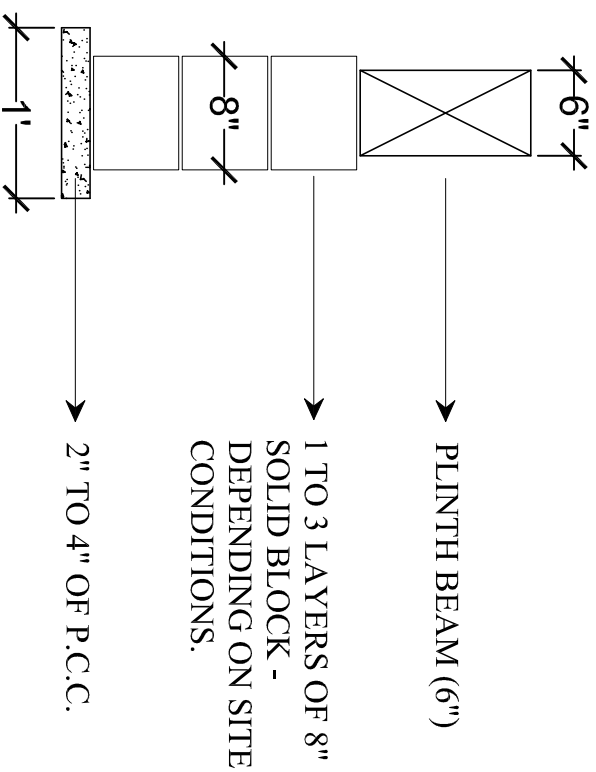

NOTE :

1. DEPTH OF BRICKWORK TO BE INCREASED/ DECREASED DEPENDING ON LOOSE OR HARD SOIL.
2. PLINTH BEAM IS A MUST UNDER EACH & EVERY WALL.
3. STAIRCASE SLAB TO START FROM PLINTH BEAM.
4. INTERNAL PLINTH BEAM CAN ONLY HAVE 1 LAYER OF CEMENT BLOCK OR, JUST P.C.C LAYER (2" OR 4") IF SOIL CONDITIONS PERMIT.
5. IN CASE PLINTH BEAM IS NOT CASTED UNDER A WALL (IN CASE OF MISTAKE OR ADDITIONS & ALTERATIONS), MAKE A 30" DEEP CRS WALL WITH 4" P.C.C. AND 3" D.P.C. UNDER THE WALL.

Description	Direction	Owners & Developers :	Date :	Promoted by
STANDARD DRAWING FOR BRICK-WORK UNDER PLINTH BEAM FIG.NO.29		Modi Properties Pvt. Ltd.	Prepared by :	Modi Properties Pvt. Ltd.
		Project Name & Phase :	Approved by :	Phone:-+91-40-66335551
			Scale :	
			N.T.S	