

Roff®

TILE & STONE FIXING EXPERT



ENTER THE WORLD OF COLOURS



SHADE CARD

RAINBOW I
TILE MATE
EPOXY

RAINBOW I
TILE MATE



ROFF RAINBOW TILE MATE

Roff Rainbow Tile Mate is water resistant cementitious tile joint filler for all kinds of tiles. It effectively fills the gaps and levels itself to give hard wearing, non-dusting, tile joints.

AREAS OF APPLICATION

For filling tile joints in bathrooms, kitchens, internal & external floor & wall tiles. Joins upto 5 mm width tiles.

FEATURES

- High compressive, tensile & flexural strength
- Water resistant property
- Easy to use and clean
- Available in 15 exciting shades

BENEFITS



Easy to clean



Durable



Water resistant
tile joints

HOW TO USE



1 Add 3 to 3.5 parts of Roff Rainbow Tile Mate to one part of water by volume.



2 Mix to a smooth consistency.



3 Fill the tile joints by spreading filler paste with rubber trowel such that the entire area of joint gaps are filled.



4 Remove surplus Roff Rainbow Tile Mate with a damp sponge. Allow 24 hours to dry.

ROFF RAINBOW TILE MATE EPOXY



RoFF Rainbow Tile Mate Epoxy is resin based epoxy tile joint filler which exhibits stain resistant, chemical resistant, hard wearing & impervious properties. Ideal for use in kitchens, bathrooms & wet areas.

AREAS OF APPLICATION

Ideal for use in kitchens, bathrooms & wet areas.

FEATURES

- Easy to mix, apply & use
- Can be cleaned after application very easily with a damp sponge
- Ensures longevity of tiles maintaining beauty & strength
- Certified for use in kitchens & bathrooms by CFTRI, Mysore
- Colour fastness & available in wide range of shades

BENEFITS




Prevents cracking in tile joints

Stain & Acid Resistant Tile Joint Filler

Waterproof Tile Joints

HOW TO USE



1 Thoroughly mix 1.19 part hardener : 1.67 part resin.

2 Add 7:14 part of filler. Mix gradually until homogeneous paste obtained.

3 With the help of a squeeze trowel fill the tile joints.

4 Clean the tiles with a wet hard sponge immediately, remove the excess material from the tile. Allow to dry before using.



ROFF ADVICE CENTRE

 **1800 2255 02**



Pidilite Industries Ltd.

Construction Chemicals Division, Ramakrishna Mandir Road,
PO Box No. 17411, Andheri East, Mumbai 400 059.
TEL (022) 2835 7000 | FAX (022) 2835 7008
www.roff.in | roff@pidilite.co.in | SMS <RoFF> on 57575



Follow us on

DISCLAIMER

The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out tests & take trials to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problem, quality of other materials used and on-site workmanship are factors beyond our control, there are no expressed or implied guarantee / warranty as to the result obtained. The company does not assume any liability or any consequential damage for unsatisfactory results, arising from use of our products.

COVERAGE CHARTS

RAINBOW TILE MATE EPOXY (RTM)

Tile Dimension (mm)		RTM Tile Grout Coverage in sq.ft./kg									
		Joint/ Grouting Width									
Length	Width	Thickness	2	3	4	5	6	8	10	12	
300	200	6	79.9	53.3	40.0	32.0	26.6	20.0	16.0	13.3	
300	300	6	99.9	66.6	50.0	40.0	33.3	25.0	20.0	16.7	
450	300	6	119.9	79.9	59.9	48.0	40.0	30.0	24.0	20.0	
600	300	6	133.2	88.8	66.6	53.3	44.4	33.3	26.6	22.2	
600	600	8	149.9	99.9	74.9	59.9	50.0	37.5	30.0	25.0	
800	800	8	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3	
1000	1000	10	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3	
1200	600	10	159.9	106.6	79.9	63.9	53.3	40.0	32.0	26.6	
1200	800	10	191.8	127.9	95.9	76.7	63.9	48.0	38.4	32.0	
1200	1200	12	199.8	133.2	99.9	79.9	66.6	50.0	40.0	33.3	
1600	800	12	177.6	118.4	88.8	71.1	59.2	44.4	35.5	29.6	
1800	1200	12	239.8	159.9	119.9	95.9	79.9	59.9	48.0	40.0	
25	25	6	8.3	5.6	4.2	3.3	2.8	2.1	1.7	1.4	
25	50	6	11.1	7.4	5.6	4.4	3.7	2.8	2.2	1.9	
50	50	6	16.7	11.1	8.3	6.7	5.6	4.2	3.3	2.8	
100	100	6	33.3	22.2	16.7	13.3	11.1	8.3	6.7	5.6	
100	100	10	20.0	13.3	10.0	8.0	6.7	5.0	4.0	3.3	

RAINBOW TILE MATE EPOXY (RTM EPOXY)

Tile Dimension (mm)		RTM Epoxy Tile Grout Coverage in sq.ft./kg									
		Joint/ Grouting Width									
Length	Width	Thickness	2	3	4	5	6	8	10	12	
300	200	6	61.5	41.0	30.7	24.6	20.5	15.4	12.3	10.2	
300	300	6	76.9	51.2	38.4	30.7	25.6	19.2	15.4	12.8	
450	300	6	92.2	61.5	46.1	36.9	30.7	23.1	18.4	15.4	
600	300	6	102.5	68.3	51.2	41.0	34.2	25.6	20.5	17.1	
600	600	8	115.3	76.9	57.6	46.1	38.4	28.8	23.1	19.2	
800	800	8	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6	
1000	1000	10	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6	
1200	600	10	123.0	82.0	61.5	49.2	41.0	30.7	24.6	20.5	
1200	800	10	147.6	98.4	73.8	59.0	49.2	36.9	29.5	24.6	
1200	1200	12	153.7	102.5	76.9	61.5	51.2	38.4	30.7	25.6	
1600	800	12	136.6	91.1	68.3	54.7	45.5	34.2	27.3	22.8	
1800	1200	12	184.5	123.0	92.2	73.8	61.5	46.1	36.9	30.7	
25	25	6	6.4	4.3	3.2	2.6	2.1	1.6	1.3	1.1	
25	50	6	8.5	5.7	4.3	3.4	2.8	2.1	1.7	1.4	
50	50	6	12.8	8.5	6.4	5.1	4.3	3.2	2.6	2.1	
100	100	6	25.6	17.1	12.8	10.2	8.5	6.4	5.1	4.3	
100	100	10	15.4	10.2	7.7	6.1	5.1	3.8	3.1	2.6	

Note :

(1) This is theoretical coverage. (2) For Sq. Mtr./ kg coverage, divide mentioned coverage by 10.764.

ROFF RAINBOW TILE MATE

SNOW WHITE

LILY WHITE

NEW IVORY

NEW CREAMY
WHITE

*BEIGE

NATURAL

*KHAKI

PASTEL GREY

SLATE GREY

STEEL GREY

*PASTEL BROWN

*COFFEE BROWN

*TERRACOTTA


*ALPINE BLUE

*JET BLACK

ROFF RAINBOW TILE MATE EPOXY



ROFF RAINBOW TILE MATE EPOXY

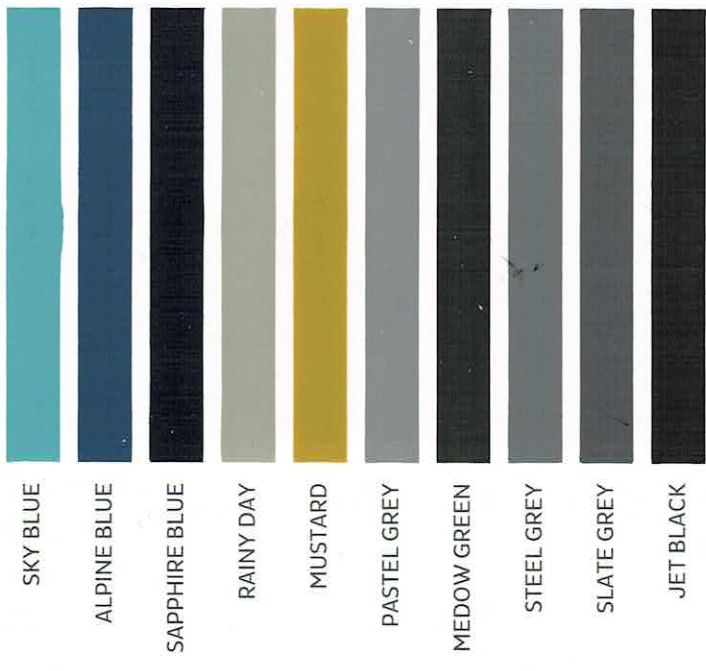

Care has been taken to reproduce the shades as closely as possible. Workmanship, site conditions & the amount of water used to the specified mix may produce slight variations in the shades.