

Tax Invoice

(ORIGINAL FOR RECIPIENT)

e-Invoice



IRN : cfa6105f86be53af4753768dedcea90bcca55d1b34403-10f942f360b0ce32207
 Ack No. : 112524337743222
 Ack Date : 27-Mar-25

VAJRA TRANSPower PVT LTD PLOT NO-5, PHASE IV, IP, PASHAMAILARAM, SANGA REDDY, HYDERABAD-502307 GSTIN/UIN: 36AAGCV4849R1ZC State Name : Telangana, Code : 36 E-Mail : vajra.transpower@gmail.com Consignee (Ship to) M.C.MODI EDUCATIONAL TRUST Survey No.31, Genome Valley Bypass Road, Karimnagar Highway, Maraharipally, Near Shamirpet, Hyderabad, Telangana State PIN 500075 GSTIN/UIN : 36AAATM5488Q2ZO State Name : Telangana, Code : 36 Buyer (Bill to) M.C.MODI EDUCATIONAL TRUST SOHAM MANSION, 5-4-187/3 and 4, 2ND FLOOR, M.G ROAD, SECUNDERABAD, Rangareddy, Telangana, 500003 GSTIN/UIN : 36AAATM5488Q2ZO State Name : Telangana, Code : 36		Invoice No. 866/24-25 e-Way Bill No. 102077221163 Dated 27-Mar-25 Delivery Note Reference No. & Date. Buyer's Order No. 20250201037 Dispatch Doc No. 866/24-25 Dispatched through BY ROAD Bill of Lading/LR-RR No. Mode/Terms of Payment Other References W.O.No: 0315/2024-25 Dated 1-Feb-25 Delivery Note Date Destination MURAHARIPALLY Motor Vehicle No. TS15UF1765 Terms of Delivery	
--	--	--	--

SI No.	Description of Goods	HSN/SAC	Quantity	Rate	per	Amount
1	Distribution Transformer 315kVA, 11000/433-250V, Copper Wound, Amorphous Core, Three Phase, Energy Efficiency Level-2(Star-2), Oil Immersed, Non-Selel Type, 09Pos OFTC Distribution Transformer with both LV and HV side cable boxes and first filling of oil and accessories as per IS1180(Part-1):2014, Latest Ammendment-4 Tr.Sr.No: 24255942 MAKE: VAJRA	85043300	1 NO'S	8,40,000.00	NO'S	8,40,000.00
					9 %	75,600.00
					9 %	75,600.00
	CGST					
	SGST					
	Total		1 NO'S			₹ 9,91,200.00

E. & O.E

Amount Chargeable (in words)
INR Nine Lakh Ninety One Thousand Two Hundred Only

HSN/SAC	Taxable Value	Central Tax		State Tax		Total Tax Amount
		Rate	Amount	Rate	Amount	
85043300	8,40,000.00	9%	75,600.00	9%	75,600.00	1,51,200.00
Total	8,40,000.00		75,600.00		75,600.00	1,51,200.00

Tax Amount (in words) : **INR One Lakh Fifty One Thousand Two Hundred Only**

Declaration
 We declare that this invoice shows the actual price of the goods described and that all particulars are true and correct.

for VAJRA TRANSPower PVT LTD

 Authorised Signatory

20250328024

INWARD	
Inward No: 2295	Di: 28/03/25
MRN No:	Dr:
Received By: <i>[Signature]</i>	Sign:
MC MODI EDUCATIONAL TRUST	

This is a Computer Generated Invoice

e-Way Bill

e-Way Bill

Doc No.: Tax Invoice - 866/24-25
Date: 27-Mar-25
N : cfa6105f86be53af4753768dedcea90bcca55d1b3440310f942f360b0ce32207
ck No.: 112524337743222
ck Date: 27-Mar-25



e-Way Bill Details

Way Bill No.: 102077221163 Mode : 1 - Road
Generated By: 36AAGCV4849R1ZC Approx Distance: 30 KM
Supply Type: Outward-Supply Transaction Type: Bill To - Ship To

Generated Date: 27-Mar-25 6:5
Valid Upto : 28-Mar-25 11:5

Address Details

From
AJRA TRANSPower PVT LTD
GSTIN : 36AAGCV4849R1ZC
Telangana

To
M.C.MODI EDUCATIONAL TRUST
GSTIN : 36AAATM5488Q2ZO
Telangana

Dispatch From

PLOT NO-5, PHASE IV, IP, PASHAMAILARAM,, SANGA REDDY,
HYDERABAD-502307
PASHAMYLARAM Telangana 502307

Ship To
Survey No.31, Genome Valley Bypass Road,, Karimnagar Highway,
Maraharipally,, Near Shamirpet,, Hyderabad,, Telangana
State, PIN 500075 Telangana 500075

3. Goods Details

HSN	Product Name & Desc	Quantity	Taxable Amt	Tax I (C+)
85043300	Distribution Transformer & 7230	1 NOS	8,40,000.00	9+

Total Inv Amt : 9,91,20

Tot.Taxable Amt : 8,40,000.00 Other Amt :
CGST Amt : 75,600.00 SGST Amt : 75,600.00

4. Transportation Details


Transporter ID :
Name :

Doc No. :
Date : 27-Mar-25

5. Vehicle Details

Vehicle No. : TS15UF1765 From : PASHAMYLARAM

CEWB No.:

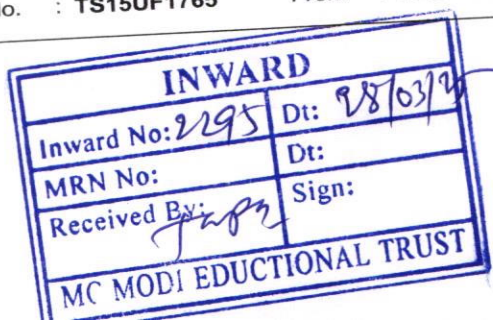



VAJRA TRANSPOWER PVT LTD

Plot No:5, Phase-4, IP Pashamylaram, Sangareddy District, Telangana-502307

TEST CERTIFICATE

For Copper Wound Three Phase Distribution Transformer Tested as per IS1180(Part-1):2014

CUSTOMER NAME & ADDRESS : M/s MANILAL MODI MEMORIAL MEDICAL CENTER
: Sy No:31, Genome Valley Bypass Road,
: Karimnagar Highway, Muraharipally,
: Near Shamirpet, Hyderabad, Telangana-500075

Date: 26.03.2025

PO No : 20250201037, Dated 01.02.2025

RATING	:	315 kVA Con (Cu)
VOLTAGE RATIO	:	11000 / 433 VO
TRANSFORMER SL. NO.	:	24255942
PHASE & CYCLES	:	3 & 50 Hz
TYPE	:	OUTDOOR
ENERGY EFFICIENT LEVEL	:	2

HV FULL LOAD CURRENT	:	16.53 AMPS
LV FULL LOAD CURRENT	:	420.02 AMPS
COOLING	:	ONAN
VECTOR GROUP	:	Dyn11
CORE	:	AMORPHOUS
W O No	:	VDTR0315/2024-25

RESISTANCE OF WINDING IN NORMAL TAP

AVG LV BETWEEN TERMINALS

2u2v-2v2w-2w2u

4.0973 mΩ AT 33.8°C

AVG HV BETWEEN TERMINALS

1U1V-1V1W-1W1U

2.137 Ω AT 33.8°C

Off Circuit Tap Switch Position

	1	2	3	4	5(Nor)	6	7	8	9	POLARITY & PHASE RELATIONSHIP FOUND OK
Specified Turns Ratio	48.40	47.30	46.20	45.10	44.00	42.90	41.80	40.70	39.60	
Phase - U	48.44	47.30	46.23	45.15	44.01	42.87	41.80	40.72	39.58	
Phase - V	48.44	47.30	46.23	45.15	44.01	42.87	41.80	40.72	39.58	
Phase - W	48.44	47.30	46.23	45.15	44.01	42.87	41.79	40.72	39.58	

LOSSES

OBSERVED VALUE

GUARANTEED VALUE

NO LOAD CURRENT AT RATED VOLTS AT 50 Hz

1.06 AMPS

8.40 AMPS

NO LOAD LOSSES AT RATED VOLTS AT 50 Hz

212 WATTS

MAXIMUM TOTAL LOSSES @50% LOAD

841 WATTS

955 WATTS MAX

MAXIMUM TOTAL LOSSES @100% LOAD

2731 WATTS

2750 WATTS MAX

% IMPEDANCE

4.32%

4.50 % & IS : TOL

%REGULATION

AT UPF

0.81%

AT 0.8 PF

3.16%

EFFICIENCY

AT UPF

125%

100%

75%

50%

25%

AT 0.8 PF

98.96

99.14

99.32

99.47

99.53

98.70

98.93

99.15

99.34

99.42

DI- ELECTRIC TEST

1 A) SSVW TEST : APPLIED 28000 VOLTS ON H.V WINDING ON TRANSFORMER WITH L.V WINDING AND TANK BODY EARTHED TOGETHER FOR 60SEC AND WITHSTOOD O.K
B) SSVW TEST : APPLIED 3000 VOLTS ON L.V WINDING ON TRANSFORMER WITH H.V WINDING AND TANK BODY EARTHED TOGETHER FOR 60SEC AND WITHSTOOD O.K

2 INDUCED OVER VOLTAGE WITHSTAND TEST : APPLIED 866 VOLTS AT 150Hz FOR 45SEC ON LV WINDING AND KEEPING HV WINDING OPEN. WITHSTOOD O.K.

INSULATION RESISTANCE

1 LT TO EARTH

15.1 GEGA OHMS AT 33.8 °C

2 HT TO EARTH

8.34 GEGA OHMS AT 33.8 °C

3 HT TO LT

18.3 GEGA OHMS AT 33.8 °C

OIL TEST

BDV OF OIL MEASURED AS 65.2 KV AND FOUND OK.

MAGNETIC BALANCE TEST

CHECKED AND FOUND OK.

VECTOR GROUP

CHECKED AND FOUND OK.

TESTED BY

G.Santosh

Manager-Quality

VAJRA TRANSPOWER PVT LTD

