

Note:-

(pon)

28/1/18

LT+HT Wkds for NE-II. Supplier has agreed for the rates which are highlighted. These are the final rates. The difference in between Supplier and your agreed rate is Rs. 82,500 and the rates are excluding GST. Now the GST is 18% for all! Point no. 2.

BOP Bk is already corrected with MS Switch at 85k this is only exception.

Charges: Point 5 - Previous 1,40,000. Now the Supplier agreed for 1.80.

because of increase in rates. Kindly suggest me! and advance of 2.12k. Supplier is requesting as per our Po it is 1.20 k. Kindly approve for the same!

Poojashakar

Note:

OUTWARD

~~POW~~

27/11/12

Comparison of Electrical LT/HT work of
- NE VS NE-II with Venubabu vs
new supplier rates kindly look in it

Beckman
Purchase

Prabakar,

See if you can settle for
these rates. I hope they

are inclusive of GST.

✓

18/1/13

Check item # 5 - old wo.

Nok:-

~~For~~

21/11/17

Electrical LT HT works for NC-II
Supplier given a Quote kindly
look in to it!

Poosyakar.
Purchase

Make comparison with NFE first
part 1
✓

~~Original/Office Copy/Purchase Div. Copy~~

Date: 25/01/2017.

From:
M/s Nilgiri Estates,
5-4-187/3&4, IInd floor, M.G.Road,
Secunderabad

To,
M/s Venkateshwara Powertech,
Plot no. 20-969, Papi Reddy Colony, Near Chandanagar Railway Station,
Hyderabad – 500019. T.S.

Kind Attn.: Mr. Sampath.

WORK ORDER

Subject: Confirmation of Work Order for LT & HT works on a turn key basis for our project Nilgiri Estates, Located at Rampally.

Ref: 1) Your Quotation dtd. 15/11/2017.
2) Approved quote by MD dtd. 24/01/2018.

 25/1

✓



Dear Sir,

With reference to the above, we hereby award you the work order for the LT & HT works on a turn key basis as per the details mentioned below.

Sl. No.	Item Head	Item description	Quantity	Units	Rate Rs.	Amount Rs.	Item head amount Rs.
1	Liasoning	Liasoning , estimation, sanction and approval till the release of power as per the requirement of villa no. 82 to 185	01	LS	2,20,000	2,20,000 ✓	
2	HT works	Erection and Termination at the transformer and all cables	01	No	10,000	10,000 ✓	
3	LT works	Supply and errection of 630 amps MCCB DB Board(LT Make) fabrication of 16 guage CRCA sheet free standing cubical without door type LT Kisok	01 ✓	No	45,000	45,000	
4	Main LT panel for the EB power	Supply and errection of 630 amps MCCB with aluminium busbar set with 1 to 100 amps MCCB&1 no 63 A for out going with 16 guage CRCA sheet,free standing cubical without door	01 ✓	No	1,00,000	1,00,000	
5	Feeder boards for EB power supply	Fabrication supply and indtallation od out door feeder boxes,double circuts,double door made up of 16 guage CRCAsheet, copper busbar with removal type of gland plates with incoming of 100 amps MCCB,L&T Make-1 no, indication lamps, out going 32 A,TP MCB LT Make-8 nos	07 nos ✓	LS	2,00,000	2,00,000	
		Fabrication supply and indtallation od out door feeder boxes,double circuts,double door made up of 16 guage CRCAsheet, copper busbar with removal type of gland plates with incoming of 100 amps MCCB,L&T Make-1 no, indication lamps, out going 32 A,TP MCB LT Make-	05 nos ✓	LS	1,50,000	1,50,000	

		11 nos					
6	Cable laying for the EB supply	Laying of LT cable – 3.5 x 240 sq. mm – 300mtrs Laying of LT cable – 3.5 x 95 sq. mm – 100mtrs Laying of LT cable – 3.5 x 75 sq. mm – 600mtrs Laying of LT cable – 3.5 x 50 sq. mm – 600mtrs	₹/-	-	LS	1,60,000	1,60,000
7	Meter fixing	Meter fixing charges and sealing	₹/-	104	Nos	350	36,400
8	Charging & LC Charges	Charging & LC Charges		-	LS	15,000	15,000
	Grand Total	(Rs. Nine lakhs thirty six thousand and four hundred only)					9,36,400/-

Terms and conditions:

a. Specifications:

- Specification shall be as specified by electricity board from time to time.
- All distribution boards and panel boards shall be made from 16 gauge CRCA sheet with powder coating, free standee and with 2nos 1 1/2" L angle at bottom and 2 hooks on top. Each panel board shall have 3 indicator lights. Aluminium bus bar of appropriate size to be provided. Cabling must be done using Finolex/Gloster copper wire. The cost above includes supply, fabrication and installation of the distribution/ panel boards.

b. Payment terms:

- Advance for sanction – Rs. 2 lakhs.
- Advance for fabrication of distribution/panel boards – 50% of cost.
- HT works – 100% payment on dumping of all items for HT works at site.
- Balance payment for distribution and panel boards – 50% on delivery of materials at site.
- Cable laying charges – pay 100% on completion of installation of cables, transformer and panel boards.
- Laisoning charges for Dy. CEIG. + meter fixing + other charges – pay after charging of transformer and meter and submission of bills.

[Handwritten signature] 25/11 ✓

[Handwritten signature]

c. GST: Extra @18%

d. Timeline:

- i. Sanction – 30days.
- ii. Delivery of material for HT works – 30 days
- iii. Delivery of distribution/panel boards – 45 days
- iv. Installation of all equipment – 60 days
- v. Charging and sealing of meters – 75 days
- vi. Penalty for delay: Penalty of 5% will be levied on the total W.O. value for delay beyond one week for every week of delay from the date scheduled completion date.

e. Transportation: It shall be your sole risk and responsibility to delivery the material at our site in time. Transportation cost shall be paid by you.

f. Warranty: You shall provide a warranty of 1 year on all equipment from the date of commissioning handing over after joint inspection against any manufacturing defects of defects in materials supplied. 1 year free servicing of maintenance, replacement cast of consumables & items provided by us shall be borne by us. 5 years warranty on 500KVA transformer from the date of commissioning.

g. Security: You shall be responsible for your materials at our site against theft/damage. Lockable rooms shall be provided on request.

h. Items to be provided by Builder at cost:

- i. HT & LT cables
- ii. Transformer
- iii. Civil & Earth works
- iv. Material for Earthing including strip connectors, glands & lugs.

i. Approved schematic plan for the work is attached herein.

 RSJ 25/1 ✓




Please sign a copy of this letter as confirmation of your accepting the above terms and conditions.


Thank you,

Yours Sincerely,

For Paramount Estates,

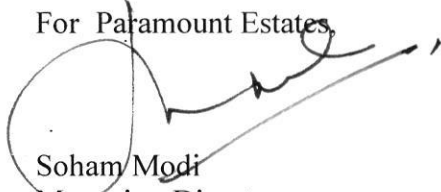
Soham Modi
Managing Director

Confirmed by M/s Venkateswara Powertech

Signature:

Name:

Date


N. Sampath Kumar Bobly
27/01/2014



VENKATESHWARA POWER TECH

ORIGINAL : FOR RECEIPT

ADMN OFFICE & WORKS : PLOT NO:10M4,IDA PHASE III, PSAHAMAYALARAM,MEDAK DIST-502 307

Phone No. 9000436869

E-mail venkateshwarapowertech.hyd@gmail.com

GSTIN No 36BIFPR2220H1ZG

TAX INVOICE

INVOICE No.	12	Date :	20/3/2019			
NAME & ADDRESS OF THE RECEIVER / BILLED TO :		NAME & ADDRESS OF THE CONSIGNEE / SHIPPED TO :				
Name of the party : NILGIRI ESTATES		Name of the party : NILGIRI ESTATES				
Address of the party : H No :5-4-187/384,SECOND FLOOR, MG ROAD,SECUNDERABAD.		Address of the party : H No :5-4-187/384,SECOND FLOOR, MG ROAD,SECUNDERABAD.				
Phone No. 9502277299		Phone No. 9502277299				
GSTIN No. : 36AAHFN0766F1ZA		GSTIN No. : 36AAHFN0766F1ZA				
STATE : TELANAGANA		STATE : TELANAGANA				
CODE : 36		CODE : 36				
SL. No.	Item Description	Grade	HSN / SA Code	Net Quantity	Rate / MT	Taxable Value
1	Erection and termination at transformer and all cables			LS		10,000
2	Cable Laying for the EB supply			LS		128,000
3	Meter fixing			52.00	350	18,200
4	Charging and LC charges			LS		15,000
BANK DETAILS				Total	52.000	171,200
Bank : IOB A/C NO: 058302000001046				Add: Freight		
IFSC : IOBA0000583 BRANCH: BASHEERBAGH				Taxable Value		171,200
SGST (in words) Rs.		FIFTEEN THOUSAND AND FOUR HUNDRED AND EIGHT RUPEES ONLY		SGST @	9%	15,408
CGST (in words) Rs.		FIFTEEN THOUSAND AND FOUR HUNDRED AND EIGHT RUPEES ONLY		CGST @	9%	15,408
IGST (in words) Rs.				IGST @		-
UGST (in words)				UGST @		
Total Invoice Value (in words) Rs.		TWO LAKHS TWO THOUSAND AND SIXTEEN RUPEES ONLY		TOTAL INVOICE VALUE		202,016
Subject to SGST/CGST/IGST as applicable at the time of delivery :						
Interest will be charged extra for any belated payment						
Received Goods in Good Condition :				Name of the Company		
Customer's Signature				E WAY PRINTED OVER LEAF		
				AUTHORISED SIGNATORY		

Date: 09/09/2017

From:

M/s Paramount Estates,
5-4-187/3&4, II nd floor, M.G.Road,
Secunderabad

To,

M/s Hi-Tech Power Enterprises,
D.No. 981, Sanathnagar,
Hyderabad – 500 018.

Kind Attn.: Mr. Venu Babu.

WORK ORDER

Subject: Confirmation of Work Order for LT & HT works.

Project: Paramount Avenues, Sy. No. 233, Nagaram.

Bill in favour of: M/s. Paramount Estate. Pan No. ____, GST no. ____.

Reference: 1) Your Quotation dtd. 02/09/2017.

Dear Sir,

With reference to the above, we hereby award you the work order for the LT & HT works on a
turnkey basis as per the details mentioned below.

Sl. No.	Item Head	Item description	Qty	Unit	Rate Rs.	Amount Rs.	Item head amount Rs.
1	Electric power connection	CT meter – 20 KVA Domestic meters – Block B Domestic meters –Block C Domestic meters – Block D Transformer – 500 KVA	01 56 40 56 01	Nos.	NA	NA	NA
1	Application Charges	Application charges for meters	153	Nos	25	3,800	3,800
2.	Sanction for electric power	Laisoning charges for approval from electricity board.	01	LS	-	1,20,000	1,20,000
3	Dy. CEIG approval	Laisoning charges for inspection and approval from electricity board after completion of installation	01	-	1,75,000	1,75,000	1,75,000
4	HT works	Supply and installation of: Box pole - Nil 11KV A.B. Switch – 1 no. 11KV H.G. Fuse – 1 set 3 x 185 sq. mm 11KV XLPE cable kits – 1 set 11KV XLPE Jumpers – 1 set 11KV HT pin insulators – 1 set Miscellaneous hardware.	01	set	38,000	38,000	38,000

		HT cable laying & end termination					
5 a)	LT works	Distribution Board at transformer. 630A MCCB.	01	Nos	35,000	35,000	35,000
b)	LT works	Main distribution board: Incoming – 400 amps MCCB – 1no. Out going – 100 amps MCCB – 4 nos. Outgoing – 125 amps MCCB – 2 nos.	01	board	75,000	1,50,000	1,50,000
c)	LT works	Meter Panel board: 20 meters per board.	04	boards	2,800	2,24,000	2,24,000
d)	LT works	Meter Panel board: 18 meters per board.	04	boards	2,800	2,01,600	2,01,600
6	Cable laying	Cable laying, Transformer installation, meter fixing, line clearing, earthing connecting charges etc.	NA	LS	60,000	60,000	60,000
7	Meter fixing	Meter fixing , charging and sealing.	152	Nos	500	76,000	76,000
8	Generator Main panel board	Generator Main panel board Incoming 100 amps MCCB - Nil Outgoing – 100 amps MCCB – 5 nos.	01	board	75,000	75,000	75,000
	Generator AMF panel board	Generator AMF panel board Incoming 100 amps MCCB - Nil Outgoing – 100 amps MCCB – 1 no. Contactor – 100 amps – 2 nos.	0	Boards			
9	CT Meter	CT Meter fixing, charging and sealing	01	Nos	5,000	5,000	5,000
10	LC Charges	Labour Charges - ??	01	LS	10,000	10,000	10,000
	Grand Total	(Rs. Eleven lakhs Seventy three three thousand and Four Hundred only)					11,73,400

Terms and conditions:

a. Specifications:

- Specification shall be as specified by electricity board from time to time.
- All distribution boards and panel boards shall be made from 16 guage CRCA sheet with powder coating, free standee and with 2nos 1 ½" L angle at bottom and 2 hooks on top. Each panel board shall have 3 indicator lights. Aluminium busbar of appropriate size to be provided. Cabling must be done using Finolex/ Gloster copper wires. The cost above includes supply, fabrication and installation of the distribution/ panel boards.

b. Payment terms:

- Advance for sanction - Rs.1.20 lakhs. ✓
- Advance for fabrication of distribution / panel boards – 50% of cost.

- iii. HT works – 100% payment on dumping of all items for HT works at site.
 - iv. Balance payment for distribution and panel boards – 50% on delivery of material at site.
 - v. Cable laying charges – pay 100% on completion of installation of cables, transformer and panel boards.
 - vi. Laisoning charges for Dy. CEIG. + meter fixing + other charges – pay after charging of transformer and meters and submission of bills.
- c. GST: Extra @18%
- d. Timeline:
- i. Sanction – 30 days
 - ii. Delivery of material for HT works – 30 days
 - iii. Delivery of distribution/panel boards – 45 days
 - iv. Installation of all equipment – 60 days
 - v. Charging and sealing of meters – 75 days.
 - vi. Penalty for delay: Penalty of 5% will be levied on the total W.O. value for delay beyond one week for every week of delay from the date of scheduled completion date.
- e. Transportation: It shall be your sole risk and responsibility to delivery the material at our site in time. Transportation cost shall be paid by you.
- f. Warranty: You shall provide a warranty of 1 year on all equipment from the date of commissioning handing over after joint inspection against any manufacturing defects of defects in materials supplied. 1 Year free servicing for maintenance, replacement cost of consumables & items provided by us shall be borne by us. 5 years warranty on 500 KVA transformer from the date of commissioning.
- g. Security: You shall be responsible for your material at our site against theft/damage. Lockable rooms shall be provided on request.
- h. Items to be provided by Builder at its cost:
- (i) HT & LT Cables.
 - (ii) Transformer
 - (iii) Civil & Earth works
 - (iv) Material for Earthing including Strip connectors.
- i. Approved schematic plan for the work is attached herein.

Please sign a copy of this letter as confirmation of your accepting the above terms and conditions.

Thank you,
Yours Sincerely,

For Paramount Estates,

Soham Modi
Managing Director

Confirmed by M/s Hitech Power Enterprises

Signature:

Name:

Date:

LTHT Works comparison of NE vs Venkateshwara power tech

Prepared by: Prabhakar

Date: 27-11-17.

							Hitech Power	Venkateshwara Power tech	Qty/Units	
1	Liasoning	Liasoning with TSSPDCL Authorities for Estimation/Power sanction approval, till the total release of Power as per the project requirement for Villa no's 1 to 80	1	LS	2,00,000	2,00,000	2,00,000	Liasoning, estimation, sanction approval for villa no-82-185	1-LS	240,000.00
2	HT works	Supply and erection of 5 poles near the entrance (HT Lines) from the main road to entrance of the site and 2 Box poles (1 for transformer and 1 for Gate)- 25,000 for pole and 45,000 for box pole each	5+2	LS	2,15,000	2,15,000	2,15,000	Erection and termination <i>Box Pole Already Erected</i>	1-No	10,000.00
3 a)	LT works for EB supply (Outdoor - Kiosk) for EB.	Supply and erection of 630 Amps MCCB Distribution board(L&T Make) Fabrication of 16 gauge CRCA sheet, free standing cubical without door(Double door) type(LT Kiosk)	1	No.	42,000	42,000	42,000	Supply and erection of 630 amps MCCB DB Board(LT Make) fabrication of 16 gauge CRCA sheet free standing cubical without door type LT Kiosk	1-No	48,510.00
b)	Main LT Panel for EB	Supply and erection of 630 Amps Aluminium bus bar capacity and 7 no's of 100 amps MCCB for outgoing with fabrication 16 gauge CRCA sheet, free standing cubical without door(Double door) type(LT Kiosk)	1 No's		74,000	74,000	74,000	Supply and erection of 630 amps MCCB with aluminium busbar set with 8 to 100 amps MCCB&1 no 63 A for out going with 16 gauge CRCA sheet, free standing cubical without door	1-No	111,500.00
4 a)	LT Feeder pillar boards for EB supply	Fabrication, supply and installation of outdoor EB Feeder pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos, outgoing 32 A TP MCB, L&T MAKE -8 no's.	4	No's	28,000	1,20,000	1,20,000	Fabrication supply and indtallation od out door feeder boxes, double circuits, double door made up of 16 gauge CRCAsheet, copper busbar with removal type of gland plates with incoming of 100 amps MCCB, L&T Make-1 no, indication lamps, out going 32 A, TP MCB LT Make-8 nos	7-No	211,050.00
b)		Fabrication, supply and installation of outdoor EB Feeder pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos, outgoing 32 A TP MCB, L&T MAKE -7 no's.	6	No's	26,500	1,59,000	1,59,000	Fabrication supply and indtallation od out door feeder boxes, double circuits, double door made up of 16 gauge CRCAsheet, copper busbar with removal type of gland plates with incoming of 100 amps MCCB, L&T Make-1 no, indication lamps, out going 32 A, TP MCB LT Make-11 nos	5-No	190,175.00
c)		Fabrication, supply and installation of outdoor EB Feeder pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos, outgoing 32 A TP MCB, L&T MAKE -9 no's.	1	No	34,000	34,000	34,000			0
5 a)	Cable Laying for EB supply	Laying of LT cable - 3 1/2 x 240sq. mm - 300 mtrs Laying of LT cable - 3 1/2 x 95sq. mm - 100 mtrs Laying of LT cable - 3 1/2 x 70sq. mm - 600 mtrs					1,40,550	Cable laying for EB Supply	LS	200,000.00



2,20,000/-
2,29,000/-
2,00,000/-
Is the box pole in the line of with 1A switch etc.
1,00,000/-
95,000/-
100,000/-
2,00,000/-
2,09,000/-
1,60,000/-
1,59,000/-
1,60,000/-
1,80,000/-
1,50,000/-
What was earlier amount?

VenkateshwaraPowerTech^(A)

Grade Licensed Contractors, HT/LTElec. Works, All Types of Panels, CEIG Approvals, Oil Filtering & Any other related Automation Works and Elec. Designs)

To

Date: 15-11-2017

M/S.Modi builders & developers,

Rampally,

Hyderabad.

Respected sir,

Sub:Price schedule for HT work at **Rampally Neelagiri estates.**

We thank you very much for the kind courtesy extended to us during our visit to your office . As required by you, we are pleased to submit our offer as per the follow(Annexure -I)

We do hope that our offer is inline with your requirement both technically and commercially and request you to release valued order on us for the supply of subject mention item and do the needful.

Thanking you & assuring of our best services and attention at all times.

With regards,



M/s Venkateshwara power tech.

Authorized.

Annexure-1

S no	Item head	Item description	Qty	Unit	Rate Rs	Amount Rs	Item head amount
1	Liasoning	Laisoning , estimation, sanction and approval till the release of power as per the requirement for villa no 82 to villa no 185	01	LS	240000.00	240000.00	240000.00
2	HT works	Erection and termination at the transformer	01	No's	10000.00	10000.00	10000.00
3	LT kiosk	Supply and erection of 630Amp MCCB distribution board (L&T make) fabrication of 16 gauge CRCA sheet free standing cubicle without door type L&T kiosk.	01	No's	48510.00	48510.00	48510.00
4	Main LT panel for the EB power	Supply and erection of 630 Amps MCCB with aluminum bus bar set with 8 no 100 Amps MCCB & 1 no 63A for outgoing with 16 gauge CRCA sheet, free standing cubicle without door	01	No's	111500.00	111500.00	111500.00
5	Feeder boards for EB power supply	Fabrication supply and installation of outdoor feeder boxes, double circuits, double door made up of 16 gauge CRCA sheet, copper bus bar with removal type of gland plates with the incoming of 100Amps MCCB,L&T make-1 no, indication lamps, out goings 32A TP MCB (L&T make)-8 no	07	No's	30150.00	211050.00	211050.00
6	Feeder boards for EB power supply	Fabrication supply and installation of outdoor feeder boxes, double circuits, double door made up of 16 gauge CRCA sheet, copper bus bar with removal type of gland plates with the incoming of 100Amps MCCB,L&T make-1 no, indication lamps, out goings 32A TP MCB (L&T make)-11 no	05	No's	38035.00	190175.00	190175.00
7	Cable laying for the EB supply	Laying of LT cable- 3.5x 240 sq. mm-300mts Laying of LT cable- 3.5x 95sq mm-100mts Laying of LT cable- 3.5x 75 sq. mm-600mts Laying of LT cable- 3.5x 50 so mm-600mts	01	LS	200000.00	200000.00	200000.00
8	Termination & earthling at transformer	All LT cables termination and earthling for the transformer and DB with 4 no's Cl earthling and 2 no's GI earthling	01	LS	10000.00	10000.00	10000.00
9	Meters fixing	Meter fixing charging and sealing	104	No's	350.00	36400.00	36400.00

10	Charging & LC charges	Charging and LC charges	01	LS	15000.00	15000.00	15000.00
	Grand total	Ten lakhs seventy two thousand six thirty five only .				1072635.00	1072635.00

Terms and conditions:

- 3 lacs advance for liaising and work execution
- 50% advance for panel cost and balance 50% to be paid after the delivery of the panels in the site
- Balance payment of the cable laying, panel installation, termination, earth strip and transformer erection to be paid after the testing commissioning and handing over of the site
- GST Extra (panels 28% & works execution 18%) ✓
- Civil and earth works are in client scope ✓
- All required material are in client scope (transformer, HT & LT cables and material of earthing) ✓

M/s Venkateswara power tech.

0A1 uthorized.

Original/Office Copy/Purchase Div. Copy

Date: 25/11/2016.

From:
M/s Nilgiri Estates,
5-4-187/3&4, II nd floor, M.G.Road,
Secunderabad


To,
M/s Srujana Power Systems,
Sy no-311/1, Shed no-1, Beside: Ranga Bhujanga Theatres,
IDA, Jeedimetla, Hyderabad-55

Kind Attn.: Mr. Srinivas Chowdary.

WORK ORDER

Subject: Confirmation of Work Order for LT & HT works on a turn key basis for our project Nilgiri Estates, Located at Rampally.

Ref: 1) Your Quotation dtd. 01/10/2016.
2) Approved quote by MD dtd. 24/11/2016.



Dear Sir,

With reference to the above, we hereby award you the work order for the LT & HT works on a turn key basis as per the details mentioned below.

Sl. No.	Item Head	Item description	Quantity	Units	Rate Rs.	Amount Rs.	Item head amount Rs.
1.	Liasoning	Liasoning with TSSPDCL Authorities for Estimation/Power sanction approval, till the total release of Power as per the project requirement for Villa no's 1 to 80	01	LS	2,00,000	2,00,000	2,00,000
2.	HT works	Supply and erection of 5 poles near the entrance (HT Lines) from the main road to entrance of the site and 2 Box poles (1 for transformer and 1 for Gate)- 25,000 for pole and 45,000 for box pole each	5+2	LS	2,15,000	2,15,000	2,15,000
3 a)	LT works for EB supply (Outdoor - Kiosk) for EB.	Supply and erection of 630 Amps MCCB Distribution board(L&T Make) Fabrication of 16 gauge CRCA sheet, free standing cubical without door(Double door) type(LT Kiosk)	01	No.	42,000	42,000	42,000
b)	Main LT Panel for EB	Supply and erection of 630 Amps Aluminium bus bar capacity and 7 no's of 100 amps MCCB for outgoing with fabrication 16 gauge CRCA sheet, free standing cubical without door(Double door) type(LT Kiosk)	01	No's	74,000	74,000	74,000
4 a)	LT Feeder pillar boards for EB supply	Fabrication, supply and installation of outdoor EB Feeder pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos,outgoing 32 A TP MCB, L&T MAKE -8 no's.	04	No's	28,000	1,20,000	1,20,000
b)		Fabrication, supply and installation of outdoor EB Feeder	06	No's	26,500	1,59,000	1,59,000

[Handwritten signature]

		pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos,outgoing 32 A TP MCB, L&T MAKE -7 no's.					
c)		Fabrication, supply and installation of outdoor EB Feeder pillar boxes, double circuits, double door made of 16 gauge CRCA Sheet, copper bus bar and removal type of gland plates with the following: incoming 100 A TP MCCB, L&T make-1 no, for indication lamps-3 nos,outgoing 32 A TP MCB, L&T MAKE -9 no's.	01	No	34,000	34,000	34,000
5 a)	Cable Laying for EB supply	Laying of LT cable – 3 ½ x 240sq. mm – 300 mtrs Laying of LT cable – 3 ½ x 95sq. mm – 100 mtrs Laying of LT cable – 3 ½ x 70sq. mm – 600 mtrs Laying of LT cable – 3 ½ x 50sq. mm – 600 mtrs	01	LS	1,40,000	1,40,000	1,40,000
b)	Termination & Earthing at Transformer area	All LT Cables(EB Supply and generator supply) termination and earthing for transformer and DB with 4 nos. of CI pipe and 2 no's of GI pipe including bentonite powder connected for GI Flat and copper flat for neutral of transformer					
6.	Getting and Fixing of Meters sealing		120	No's	360	45,000	45,000
7.	Charging and LC Charges		LS		13,000	13,000	13,000
	Grand Total						10,42,000
8	Rupees	Ten Lakhs Forty two thousands only.					

ph

C. S. S.

Terms and conditions:

- a) Specifications: Specification shall be as per drawing dated-19-09-16 and as above.
- b) Payment terms: Rs.2.00 lakhs (Rupees Two lakhs only) advance paid. 70% against supply of all items after delivery on site. Balance amount on completion of installation, handing over & commissioning after joint inspection at site.
- c) VAT and Service Tax Extra ✓
- d) Delivery & Completion: 30 days.
- e) Penalty for delay: Penalty of 5% will be levied on the total W.O. value for delay beyond one week for every week of delay from the date of scheduled completion date. Penalty amount shall be deducted/adjusted against your payment.
- f) Transportation: It shall be your sole risk and responsibility to delivery the material at our site in time. Transportation cost shall be paid by you.
- g) Warranty: You shall provide a warranty of 1 year on all equipment from the date of commissioning handing over after joint inspection against any manufacturing defects of defects in materials supplied. 1 Year free servicing for maintenance, replacement cost of consumables & items provided by us shall be borne by us. 5 years warranty on 500 KVA transformer from the date of commissioning.
- h) Schedule: Sanction for power connection in 30 days, all material to be delivered to site within 60 days of WO, installation & commissioning within 90 days of WO.
- i) Measurement: Final payment shall be made subject to measurement at site.
- j) Security: You shall be responsible for your material at our site against theft/damage. Lockable rooms shall be provided on request.
- k) Others: Above W.O excludes cost of (to be provided by Builder)
 - 1. HT & LT Cables.
 - 2. 315 KVA Transformer
 - 3. Civil & Earth works
 - 4. Material for Earthing including Strip connectors.

[Handwritten signature]

Thank you,

For Nilgiri Estates,

Soham Modi
Managing Director

Signature:

Name :

Date :

Y. Sreenivasulu
28-11-2016



VENKATESHWARA POWER TECH

ORIGINAL : FOR RECEIPT

ADMN OFFICE & WORKS : PLOT NO:10M4,IDA PHASE III, PSAHAMAYALARAM,MEDAK DIST-502 307

Phone No. 8019862895/9948227385

E-mail vpt.hyd@gmail.com

GSTIN No 36BIFPR2220H1ZG

CIN No.

TAX INVOICE

(Section 31 & Rule 1 of Tax Invoice , Debit Note & Credit Note Rules)

INVOICE No.	4	Date of Supply :	26/05/2018
NAME & ADDRESS OF THE RECEIVER / BILLED TO :		NAME & ADDRESS OF THE CONSIGNEE / SHIPPED TO :	
Name of the party NEELAGIRI ESTATES. Address of the party : H.NO. 5-4-187/384, SECOND FLOOR , MG ROAD SECUNDERABAD Phone No. 9502277299		Name of the party : NEELAGIRI ESTATES. Address of the party : H.NO. 5-4-187/384, SECOND FLOOR , MG ROAD SECUNDERABAD Phone No. 9502277299	
GST No. : 36AAHFN0766F1ZA STATE : TELANAGANA CODE : 36		GSTIN No. : 36AAHFN0766F1ZA STATE : TELANAGANA CODE : 36	
Order Acceptance No. :		e Sugam No. & Date :	
Terms of Payment :		Mode of Transport : Vehicle Regn. No. :	

SL. No.	Item Description	Grade	HSN / SA Code	UOM	Gross Weight	Tare Weight	Net Quantity	Rate / MT	Taxable Value
1	Laisoning , estimation, sanction and approval as per the requirement for villa No-81 to villa No-185			LS			1.000	220,000	220,000
							-	-	-
							-	-	-
							-	-	-
							-	-	-
							-	-	-
							-	-	-
							-	-	-
							-	-	-
							-	-	-

BANK DETAILS

Bank : IOB A/C NO: 058302000001046

IFSC : IOBA0000583 BRANCH: BASHIRBAG

SGST (in words) Rs.	NINETEEN THOUSAND EIGHT HUNDRED ONLY	SGST @	9%	19,800
CGST (in words) Rs.	NINETEEN THOUSAND EIGHT HUNDRED ONLY	CGST @	9%	19,800
IGST (in words) Rs.		IGST @		-
UGST (in words)		UGST @		-
Total Invoice Value (in words) Rs.	TWO LAKHS FIFTY NINE THOUSAND SIX HUNDRED ONLY	TOTAL INVOICE VALUE		259,600


Subject to SGST/CGST/IGST as applicable at the time of delivery :

Interest will be charged extra for any belated payment

Received Goods in Good Condition :

Customer's Signature

E WAY PRINTED OVER LEAF





VENKATESHWARA POWER TECH

TAX INVOICE

Plot No. 10M4 Part, Phase II, 2nd Road
TSIIC Industrial Park, Pashamailaram
Patancheru, Sangareddy-TS-502307
Ph.No. : 9948227385 / 8019862895
Email: vpt.hyd@gmail.com
www.venkateshwarapowertech.com

To M/s Nilgiri Estates, 5-4-187/384	Invoice No 01	Date: 03/05/2018
2nd floor, M.G. Road, Secunderabad	D.C. No. 01	Date: 03/05/2018
	Order No.	Date: 24/01/2018

GST No: 36BIFPR2220H1ZG

Party GST No. 36AAHFN0766 FLZA

S.No	PARTICULARS	Qty	RATE	Amount Rs.
01.	LT Kiosk. 630 Amps Incoming. L&T Make with 16 gauge CRCA sheet cubical	01	45,000	45,000/-
02.	Main LT panel with 630 Amps Incoming with 07 No's 100Amp outgoing & 01 No's 63A outgoing with 16 gauge CRCA sheet cubical	01	1,00,000	1,00,000/-
03.	Feeder board with 100A Incoming & 32A outgoing 08 No's	07	28571	2,00,000/-
04.	Feeder board with 100A Incoming & 32A outgoing 17 No's	05	300000	1,50,000/-
			Total	4,95,000/-
			SGST %	44550/-
			CGST %	44550/-
			IGST %	—
			G. Total	584100/-

INWARD	
Inward No: 18058	Dt: 05/5/18
MRN No:	Dt:
Received By: <i>[Signature]</i>	Sign: <i>[Signature]</i>



Rupees in words.....five lakhs eighty four
thousand and one hundred only.

FOR VENKATESHWARA POWER TECH

[Signature]
Signature

GST No: 36BIFPR2220H1ZG

M/s. Nilgiri Estates, 5-4-187/394

Challan No. 01

Date: 05/03/2018

Ind floor, M.G Road, Secunderabad

Order No.

GST No: 36AAHEND766E1ZA

Vehicle No. TS10UA2274

Sl. No.	DESCRIPTION OF MATERIAL	Qty
01	LT Kiosk with 630Amps L&T MCCB	01 No's
02	Main panel with 630Amps Incoming & 07 No's 100Amps outgoing & 01 No's 63Amps out going. (L&T MAKE)	01 No's
03	Feeder board with 100Amps Incoming & 32A outgoing 8 No's	07 No's
04	Feeder board with 100Amps Incoming & 32A outgoing 11 No's	05 No's

18055

INWARD	
Inward No: <u>18055</u>	Dt: <u>03/5/18</u>
MRN No:	Dt:
Received By: <u>[Signature]</u>	Sign: <u>[Signature]</u>
Nilgiri Estates	



Received the material in good condition

Customer's Signature

FOR VENKATESHWARA POWER TECH

Authorised Signature

10/5/12

Nick - Dr. N.E.

Father Book for beside fireplace
15-45,000 (upcoming fireplace) and
and live charges to: 10,000 1920.
55,000/2 need your approval
to send a mail. Dr. N.E.
look in the thin!

Dr. N.E.
Mother!

W

APPROVED BY
10 MAY 2012
SCOTT M. BELL
MANAGING DIRECTOR