
10/5/14.

- 1,56, ml - :



At build cost

* ~~Ranking~~ HT material to be supplied by us.
 → Carter
 * ~~Ranking~~ Ranking.

Original/Office Copy/Purchase Div. Copy

Date: 19.05.2014.

From:
M/s Summit Builders,
5-4-187/3&4, IInd floor, M.G.Road,
Secunderabad

To,
M/s Hi-Tech Power Enterprises,
D.No. 981, Sanathnagar,
Hyderabad – 500 018.

Kind Attn.: Mr. Venu Babu.

Draft WORK ORDER

Sub: Confirmation of Work Order for LT & HT works on a turn key basis for our project M/s Summit Builders, Bowenpally.
Ref: 1)Your Quotation dtd. 02.05.14

Dear Sir,

With reference to the above, we hereby award you the work order for the LT & HT works on a turn key basis as per the details mentioned below.

Sl. No.	Item Head	Item description	Quanti-ty	Uni-ts	Rate Rs.	Amount Rs.	Item head amount Rs.
1	Application Charges	Application charges	01	No.	100	100	100
2.	Liasoning	Liasoning charges with APCPDCL for obtaining sanctioning	01	LS	60,000	60,000	60,000

3	LT works	Fabrication supply and erection of meter panel board(18guage sheet) with incoming 100A busbar copper internal wiring for 07nos 3phase meters per each board connected with 7/20 Finolex copper wire.	07	Nos	3,000.00	21,000	21,000
4	HT works	HT poles labour only	01	LS	40,000	40,000	40,000
5	-	Cable termination, Earthing of panels	01	LS	10,000	10,000	10,000
6	Cable laying	Cable laying, Transformer installation, meter fixing Line clearing , Earthing connection charges etc.	01	LS	25,000	25,000	25,000
	Grand Total	(Rs. One lakhs fifty six thousand one hundred only)					1,56,100

Terms and conditions:

- Specifications : Specification shall be as above.
- Payment terms: Rs.50,000 (Rupees Fifty Thousand only) advance. 90% against supply of all items after delivery on site. Balance amount on completion of installation, handing over & commissioning after joint inspection at site.
- VAT: All taxes included.
- Delivery & Completion: ~~40~~ days.
Penalty for delay: Penalty of 5% will be levied on the total W.O. value for delay beyond one week for every week of delay from the date of scheduled completion date. Penalty amount shall be deducted/adjusted against your payment.
- Transportation: It shall be your sole risk and responsibility to delivery the material at our site in time. Transportation cost shall be paid by you.
- Warranty: You shall provide a warranty of 1 year on all equipment from the date of commissioning handing over after joint inspection against any manufacturing defects of defects in materials supplied. 1 Year free servicing for maintenance, replacement cost of consumables & items provided by us shall be borne by us. 5 years warranty on 25 KVA transformer from the date of commissioning.
- Measurement: Final payment shall be made subject to measurement at site.
- Security: You shall be responsible for your material at our site against theft/damage. Lockable rooms shall be provided on request.
- Others: Above W.O excludes cost of (to be provided by Builder)
 - HT & LT Cables.
 - 25 KVA Transformer – to be provided by department
 - Civil & Earth works



(iv) Material for Earthing including Strip connectors.

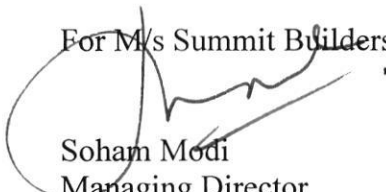
(v) Material for earthing poles, ~~conductors~~ Al wires, insulators, AB wire etc. for
connect. upto transformer.

Please sign a copy of this letter as confirmation of your accepting the above terms and conditions.

Thank you,

Yours Sincerely,

For M/s Summit Builders,


Soham Modi
Managing Director

Confirmed by M/s Hitech Power Enterprises

Signature:

Name:

Date

Original/Office Copy/Purchase Div. Copy

Date: 19.05.2014.

From:
M/s Summit Builders,
5-4-187/3&4, IInd floor, M.G.Road,
Secunderabad

To,
M/s Hi-Tech Power Enterprises,
D.No. 981, Sanathnagar,
Hyderabad – 500 018.

Kind Attn.: Mr. Venu Babu.

Draft WORK ORDER

Sub: Confirmation of Work Order for LT & HT works on a turn key basis for our project M/s Summit Builders, Bowenpally.
Ref: 1)Your Quotation dtd. 02.05.14

Dear Sir,

With reference to the above, we hereby award you the work order for the LT & HT works on a turn key basis as per the details mentioned below.

Sl. No.	Item Head	Item description	Quantity	Units	Rate Rs.	Amount Rs.	Item head amount Rs.
1	Application Charges	Application charges	01	No.	100	100	100
2.	Liasoning	Liasoning charges with APCPDCL for obtaining sanctioning	01	LS	60,000	60,000	60,000

W

3	LT works	Fabrication supply and erection of meter panel board(18guage sheet) with incoming 100A busbar copper internal wiring for 07nos 3phase meters per each board connected with 7/20 Finolex copper wire.	07	Nos	3,000.00	21,000	21,000
4	HT works	HT poles labour only	01	LS	40,000	40,000	40,000
5	-	Cable termination, Earthing of panels	01	LS	10,000	10,000	10,000
6	Cable laying	Cable laying, Transformer installation, meter fixing Line clearing , Earthing connection charges etc.	01	LS	25,000	25,000	25,000
	Grand Total	(Rs. One lakhs fifty six thousand one hundred only)					1,56,100

Terms and conditions:

- a. Specifications : Specification shall be as above.
- b. Payment terms: Rs.50,000 (Rupees Fifty Thousand only) advance. 90% against supply of all items after delivery on site. Balance amount on completion of installation, handing over & commissioning after joint inspection at site.
- c. VAT: All taxes included.
- d. Delivery & Completion: 45 days.
Penalty for delay: Penalty of 5% will be levied on the total W.O. value for delay beyond one week for every week of delay from the date of scheduled completion date. Penalty amount shall be deducted/adjusted against your payment.
- e. Transportation: It shall be your sole risk and responsibility to delivery the material at our site in time. Transportation cost shall be paid by you.
- f. Warranty: You shall provide a warranty of 1 year on all equipment from the date of commissioning handing over after joint inspection against any manufacturing defects of defects in materials supplied. 1 Year free servicing for maintenance, replacement cost of consumables & items provided by us shall be borne by us. 5 years warranty on 25 KVA transformer from the date of commissioning.
- g. Measurement: Final payment shall be made subject to measurement at site.
- h. Security: You shall be responsible for your material at our site against theft/damage. Lockable rooms shall be provided on request.
- i. Others: Above W.O excludes cost of (to be provided by Builder)
 - (i) HT & LT Cables.
 - (ii) 25 KVA Transformer – to be provided by department
 - (iii) Civil & Earth works

✓

- (iv) Material for Earthing including Strip connectors.
- (v) Material for erecting poles, Al. wires, Insulators, AB switch etc. for connection upto transformer.

Please sign a copy of this letter as confirmation of your accepting the above terms and conditions.

Thank you,

Yours Sincerely,

For M/s Summit Builders,

Soham Modi
Managing Director

Confirmed by M/s Hitech Power Enterprises

Signature:



Name:

Date

[Handwritten signature]
P. V. E. M. S. S.
31/5/14

Dt. 05.05.2014

Mr. Soham,

As per your instructions I asked Venu Babu to give quotation for getting power connection to Plot No. 13 of Bowenpally site. Please find enclosed herewith estimate given by Venu Babu for Plot No. 13, Bowenpally (Syed Mehdi Site).

In this estimate he has not mentioned amount payable to A.P.C.P.D.C.L by way of Pay Order/Bankers' Cheque. That we will have to pay directly to APCPDCL as per Dept estimate letter. It may be approx. Rs. 1,10,000/- .

This is for your information.

Kanaka Rao





HI-TECH POWER ENTERPRISES

APCPDCL APPROVED ELECTRICAL CONTRACTORS

(Mfs. of : LT Meter Panels and LT & HT Control Panels (M.C.C.B))

Spl. in : Transformer Erection and Electrical Installation Works

Date: 2/5/14

To

Ref: 0093/ /HIPE/2014

Dear Sirs,

Sub: Submission of Quotation for erection of 7 M.T.P. Sump and
25 KVA T/F - Reg.

With due respect we are herewith submitting quotation for
7 M.T.P. each 5 KVA and 25 KVA T/F with our most competitive offer and
terms and conditions are given below.

Terms and Conditions:

1. Civil work done by the Owner.
2. Completion of the work within 30 days.
3. 25% of the advance will be paid at the time of placing order.
4. Out of Balance 70% payment should be made as per progress of the work, remaining balance of 5% after charging.
5. Transportation, Erection & Meter Fixing free of cost.


for HI-TECH POWER ENTERPRISES.

According to our discussions our lowest quotation for external electrical works to _____
for an amount of Rs. 257,100/- for load details:

Residential:

3 Phase	Nos.	4	Each Load	5	Total Load	20 kW
1 Phase	Nos.		Each Load		Total Load	
Common (SP/TP)	Nos.		Each Load		Total Load	
CT Meter	Nos.		Each Load			
					Total Load	20 kW

Commercial:

3 Phase	Nos.	/	Each Load	/	Total Load	
1 Phase	Nos.		Each Load		Total Load	
Common (SP/TP)	Nos.		Each Load		Total Load	
CT Meter	Nos.		Each Load			
					Total Load	

Transformers:

Nos. 1 KVA 25

We are ready to do completion of work for the following works:

Rs. Ps.

1. 'A' Form fees	L.S.	100.00
2. A.P. Transco Sanction	L.S.	60,000.00
3. Meter Deposits	L.S.	4,000.00
4. Meter Panel Boards & Erection (For 3 MTP)	L.S.	21,000.00
5. MCCB Panel Boards & Erection	L.S.	10,000.00
6. A.P.C.P.D.C.L. DD	L.S.	
7. Earthing of Panels & T/F	L.S.	10,000.00
8. Cable Termination + Laying	L.S.	5,000.00
9. Transformer 25 KVA (APCPDCL Approved)	L.S.	20,000.00
10. A.B. Switch + HG Fuses Set	L.S.	15,000.00
11. Poles + HT Accessories (3 nos Single + 2 nos Double)	L.S.	90,000.00
12. Getting & Fixing of Metering with seal	L.S.	8,000.00
13. CEIG Approval	L.S.	
14. Test Reports	L.S.	2,000.00
15. Charging	L.S.	15,000.00

Total: 257,100.00
=====

(Rupees _____ only)

for HI-TECH POWER ENTERPRISES



HI-TECH POWER ENTERPRISES

APCPDCL APPROVED ELECTRICAL CONTRACTORS

(Mfs. of : LT Meter Panels and LT & HT Control Panels (M.C.C.B)

Spl. in : Transformer Erection and Electrical Installation Works

SPECIFICATIONS

- | | | | |
|-----|---------------|---|--|
| 1. | Sheet | : | 16 Guage CRS Sheet |
| 2. | Paint | : | Powder Coating |
| 3. | Wire | : | 4.6 OR 6.0 Sq.mm Multistand (Copper) Fine Cab or Finolex |
| 4. | Main Switches | : | L&T / Crompton Greaves |
| 5. | MCB | : | Indokupp, L&T, MDSI, Havels |
| 6. | Lugs | : | Copper (Branded) |
| 7. | Bus Bar | : | Copper |
| 8. | Fuses | : | HRC, L & T or ISI |
| 9. | Connectors | : | ISI Standard |
| 10. | M.C.C.B. | : | Compton Greaves, ABB |
| 11. | Cables | : | Havels, Finecap OR ISI Brand Gloster |
| 12. | Glands | : | Copper (ISI Brand) |
| 14. | Transformer | : | APCPDCL Approved |
| 15. | Earthing | : | APCPDCL Standard (ISI) |


for HI-TECH POWER ENTERPRISES