

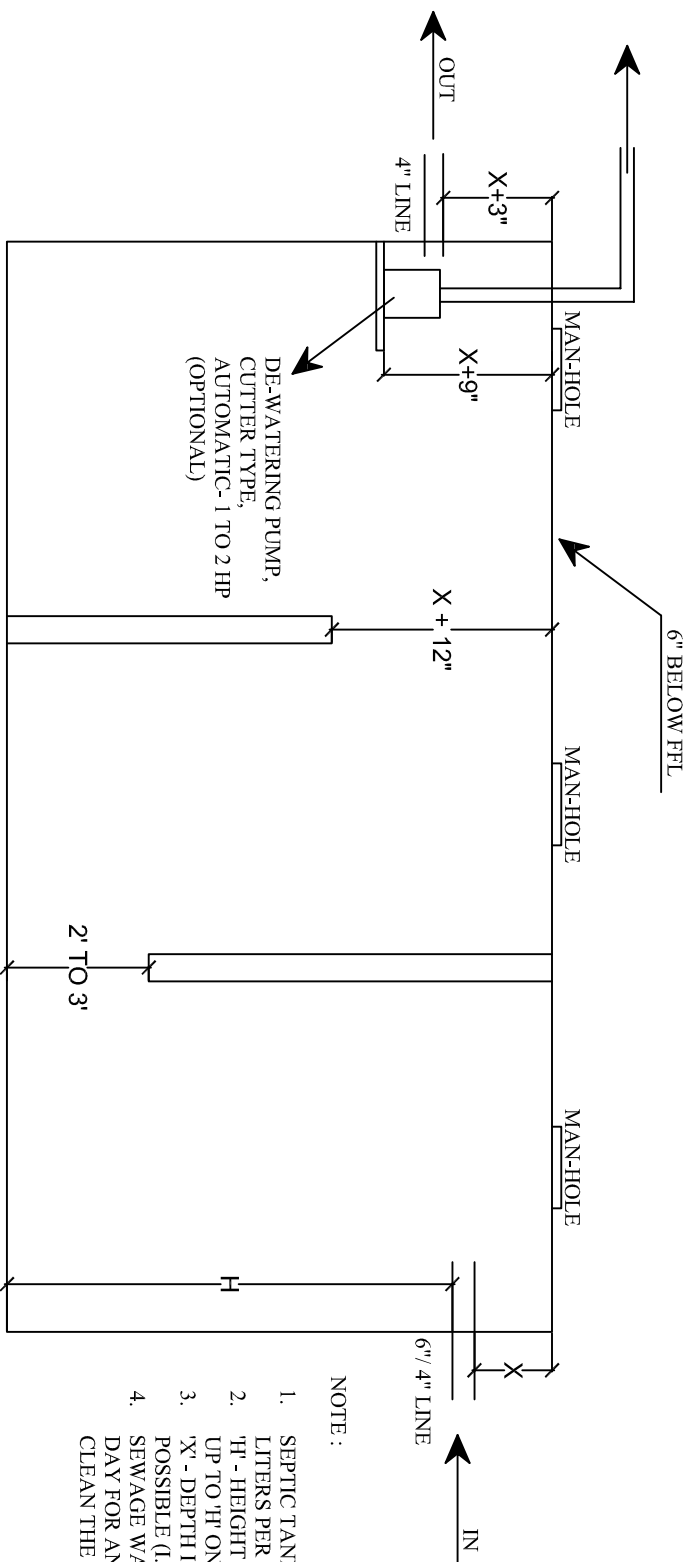


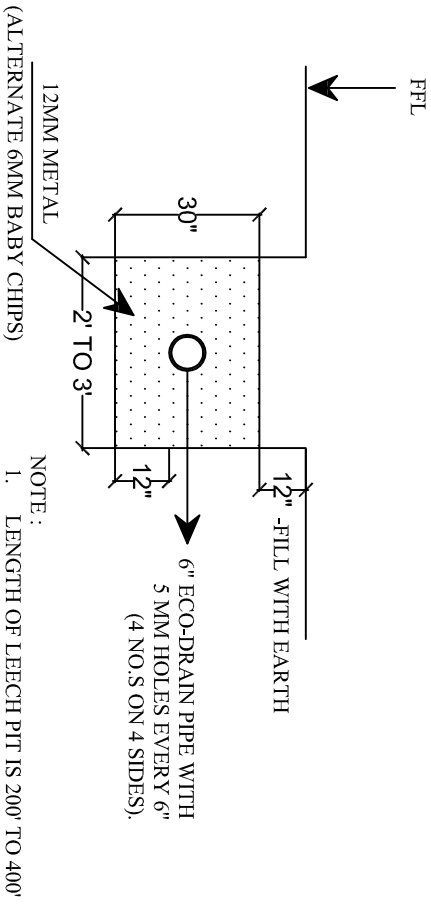

- NOTE :
1. SEPTIC TANK CAPACITY : NO. OF FLATS/VILLAS x 5 PERSONS x 135 LITERS PER PERSON x 1.5 TIMES = CAPACITY OF SEPTIC TANK.
 2. 'H' - HEIGHT OF SEPTIC TANK - MEASURE VOLUME OF SEPTIC TANK UP TO 'H' ONLY.
 3. 'X' - DEPTH IF INPUT LINE. MUST BE AS CLOSE TO THE FFL AS POSSIBLE (I.E. THE VALUE OF 'X' MUST BE LOW).
 4. SEWAGE WATER MUST REMAIN IN SEPTIC TANK FOR AT LEAST 1 DAY FOR ANAEROBIC BACTERIA TO DIGEST THE HUMAN WASTE & CLEAN THE SEWAGE.

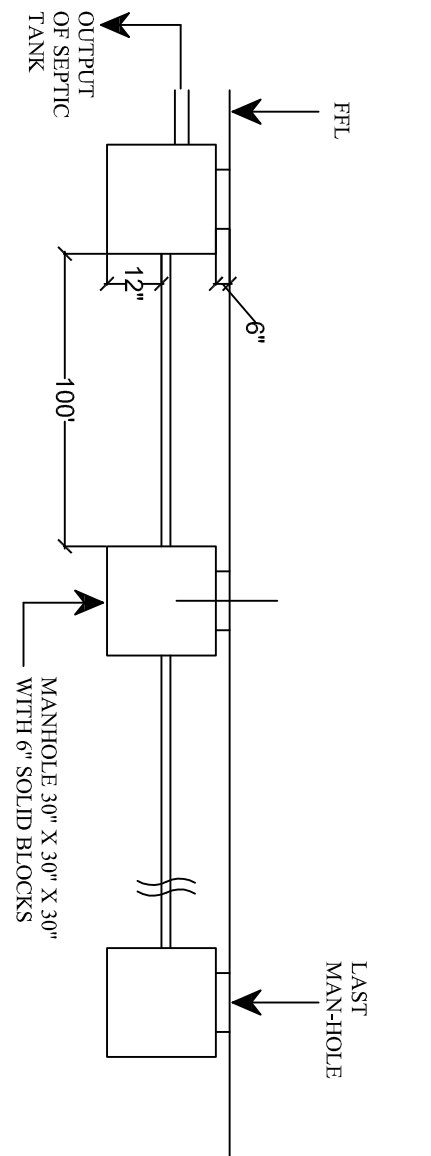

Description	Direction	Owners & Developers :		Date :	Promoted by
STANDARD SCHEMATIC PLAN FOR SEPTIC TANK & LEECH PIT FIG.NO.30		Modi Properties Pvt. Ltd.		Prepared by :	Modi Properties Pvt. Ltd.
		Project Name & Phase :		Approved by :	Phone:++91-40-66335551
				Scale :	N.T.S